


SEGATM SERVICE MANUAL

GENESIS II VA3

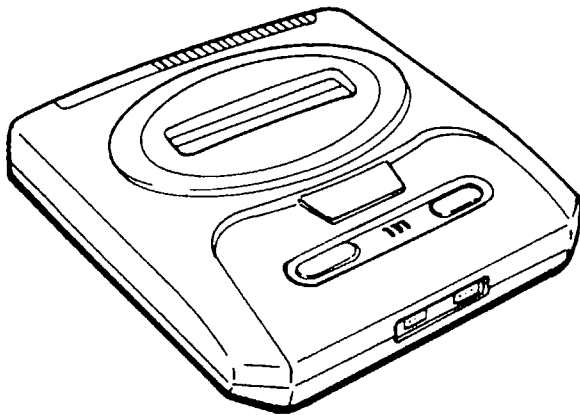

NO.	001 - 3
ISSUED	AUGUST, 1994

CONTENTS


1. DIFFERENCE TABLE	2
2. BLOCK DIAGRAM	3
3. SCHEMATIC DIAGRAMS	5
4. CIRCUIT BOARD DIAGRAMS	9
5. PARTS SPECIFICATIONS	13
6. EXPLODED VIEW & PARTS LIST	14
6-1. EXPLODED VIEW	14
6-2. MECHANICAL PARTS LIST	15
6-3. ELECTRICAL PARTS LIST	15
6-4. ACCESSORIES/PACKAGE LIST	18

Sega Enterprises, Ltd.

Before Using This Service Manual

- Parts of the circuits are different in the GENESIS II depending on the model of IC11 (RGB encoder used). Check the model of IC11 on the main circuit board and identify the type, F, S or SM.

Type	Model of IC11	Part No.
F	IC MB3514PF-G-BND-EF	313-5232-A
S	IC CXA1145M-T6 SOP	313-5213-A
SM	IC KA2195D	313-5236-A

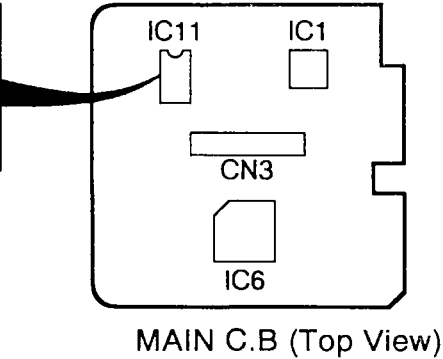


- Differences in the circuits are shown in the difference table in the schematic diagrams.
- In the parts list, differences are shown in the REMARKS columns.
- This unit is a revision of GENESIS II , and IC9 and IC10 have been integrated into one chip.
- Accompanying this integration, the circuits have also been changed and the board has been made slightly smaller.
- Refer to the following for differences regarding parts that have been changed.
- For the details of changes, refer to this service manual and service manual No. 001 or manual No. 001-2 that is a revision of manual No. 001 to compare the differences.

1. DIFFERENCE TABLE

Circuit No.	GENESIS VA1		GENESIS VA3	
	Part No.	Description	Part No.	Description
	837-9793-S 837-9793-SM 837-9793-F	IC BD MD2 VA1S USA IC BD MD2 VA1SM USA IC BD MD2 VA1F USA	837-10150-S 837-10150-SM 837-10150-F	IC BD MD2 VA3S USA IC BD MD2 VA3SM USA IC BD MD2 VA3F USA
IC9	313-5063-A 313-5221-A	IC LM 324 SOP IC BA10324AF-T1 SOP	315-5684	IC CUSTOM CP BA 6166FS SOP
IC10	313-5063-A 313-5221-A	IC LM 324 SOP IC BA10324AF-T1 SOP	NOTHING	NOTHING


2. BLOCK DIAGRAM

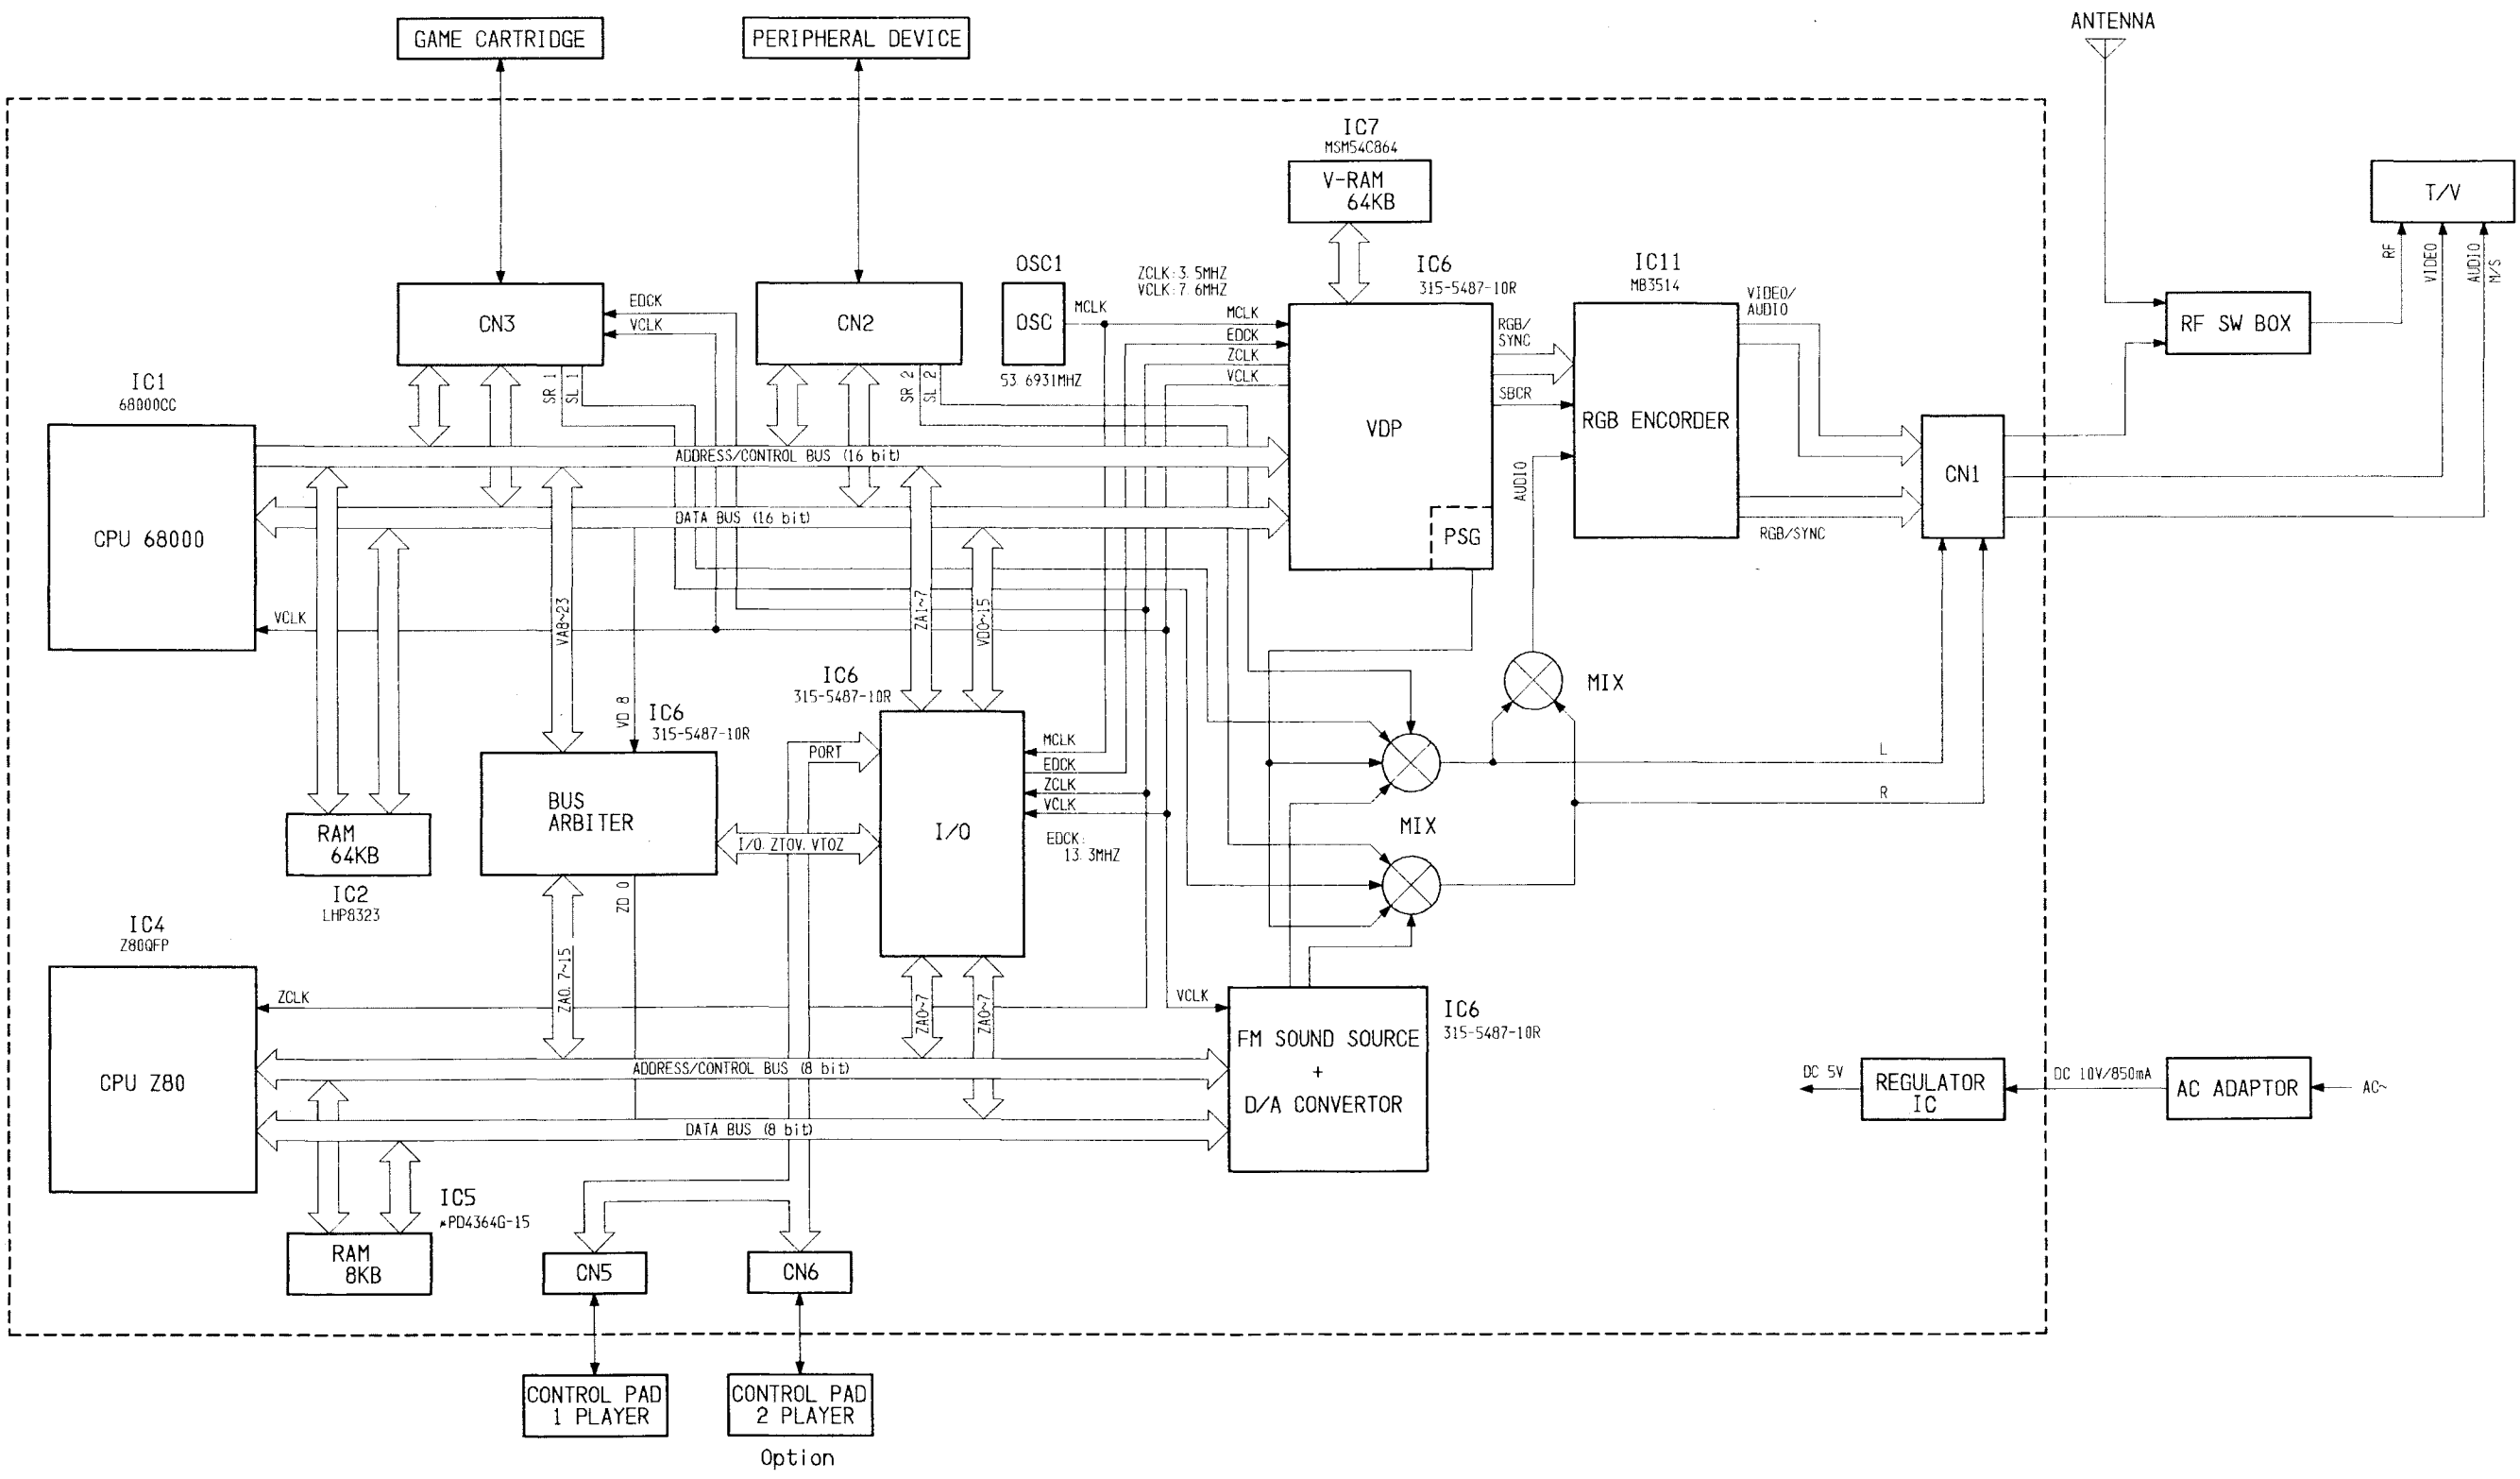


3. SCHEMATIC DIAGRAM

3-1. Schematic Diagram-1

1
2
3
4
5
6

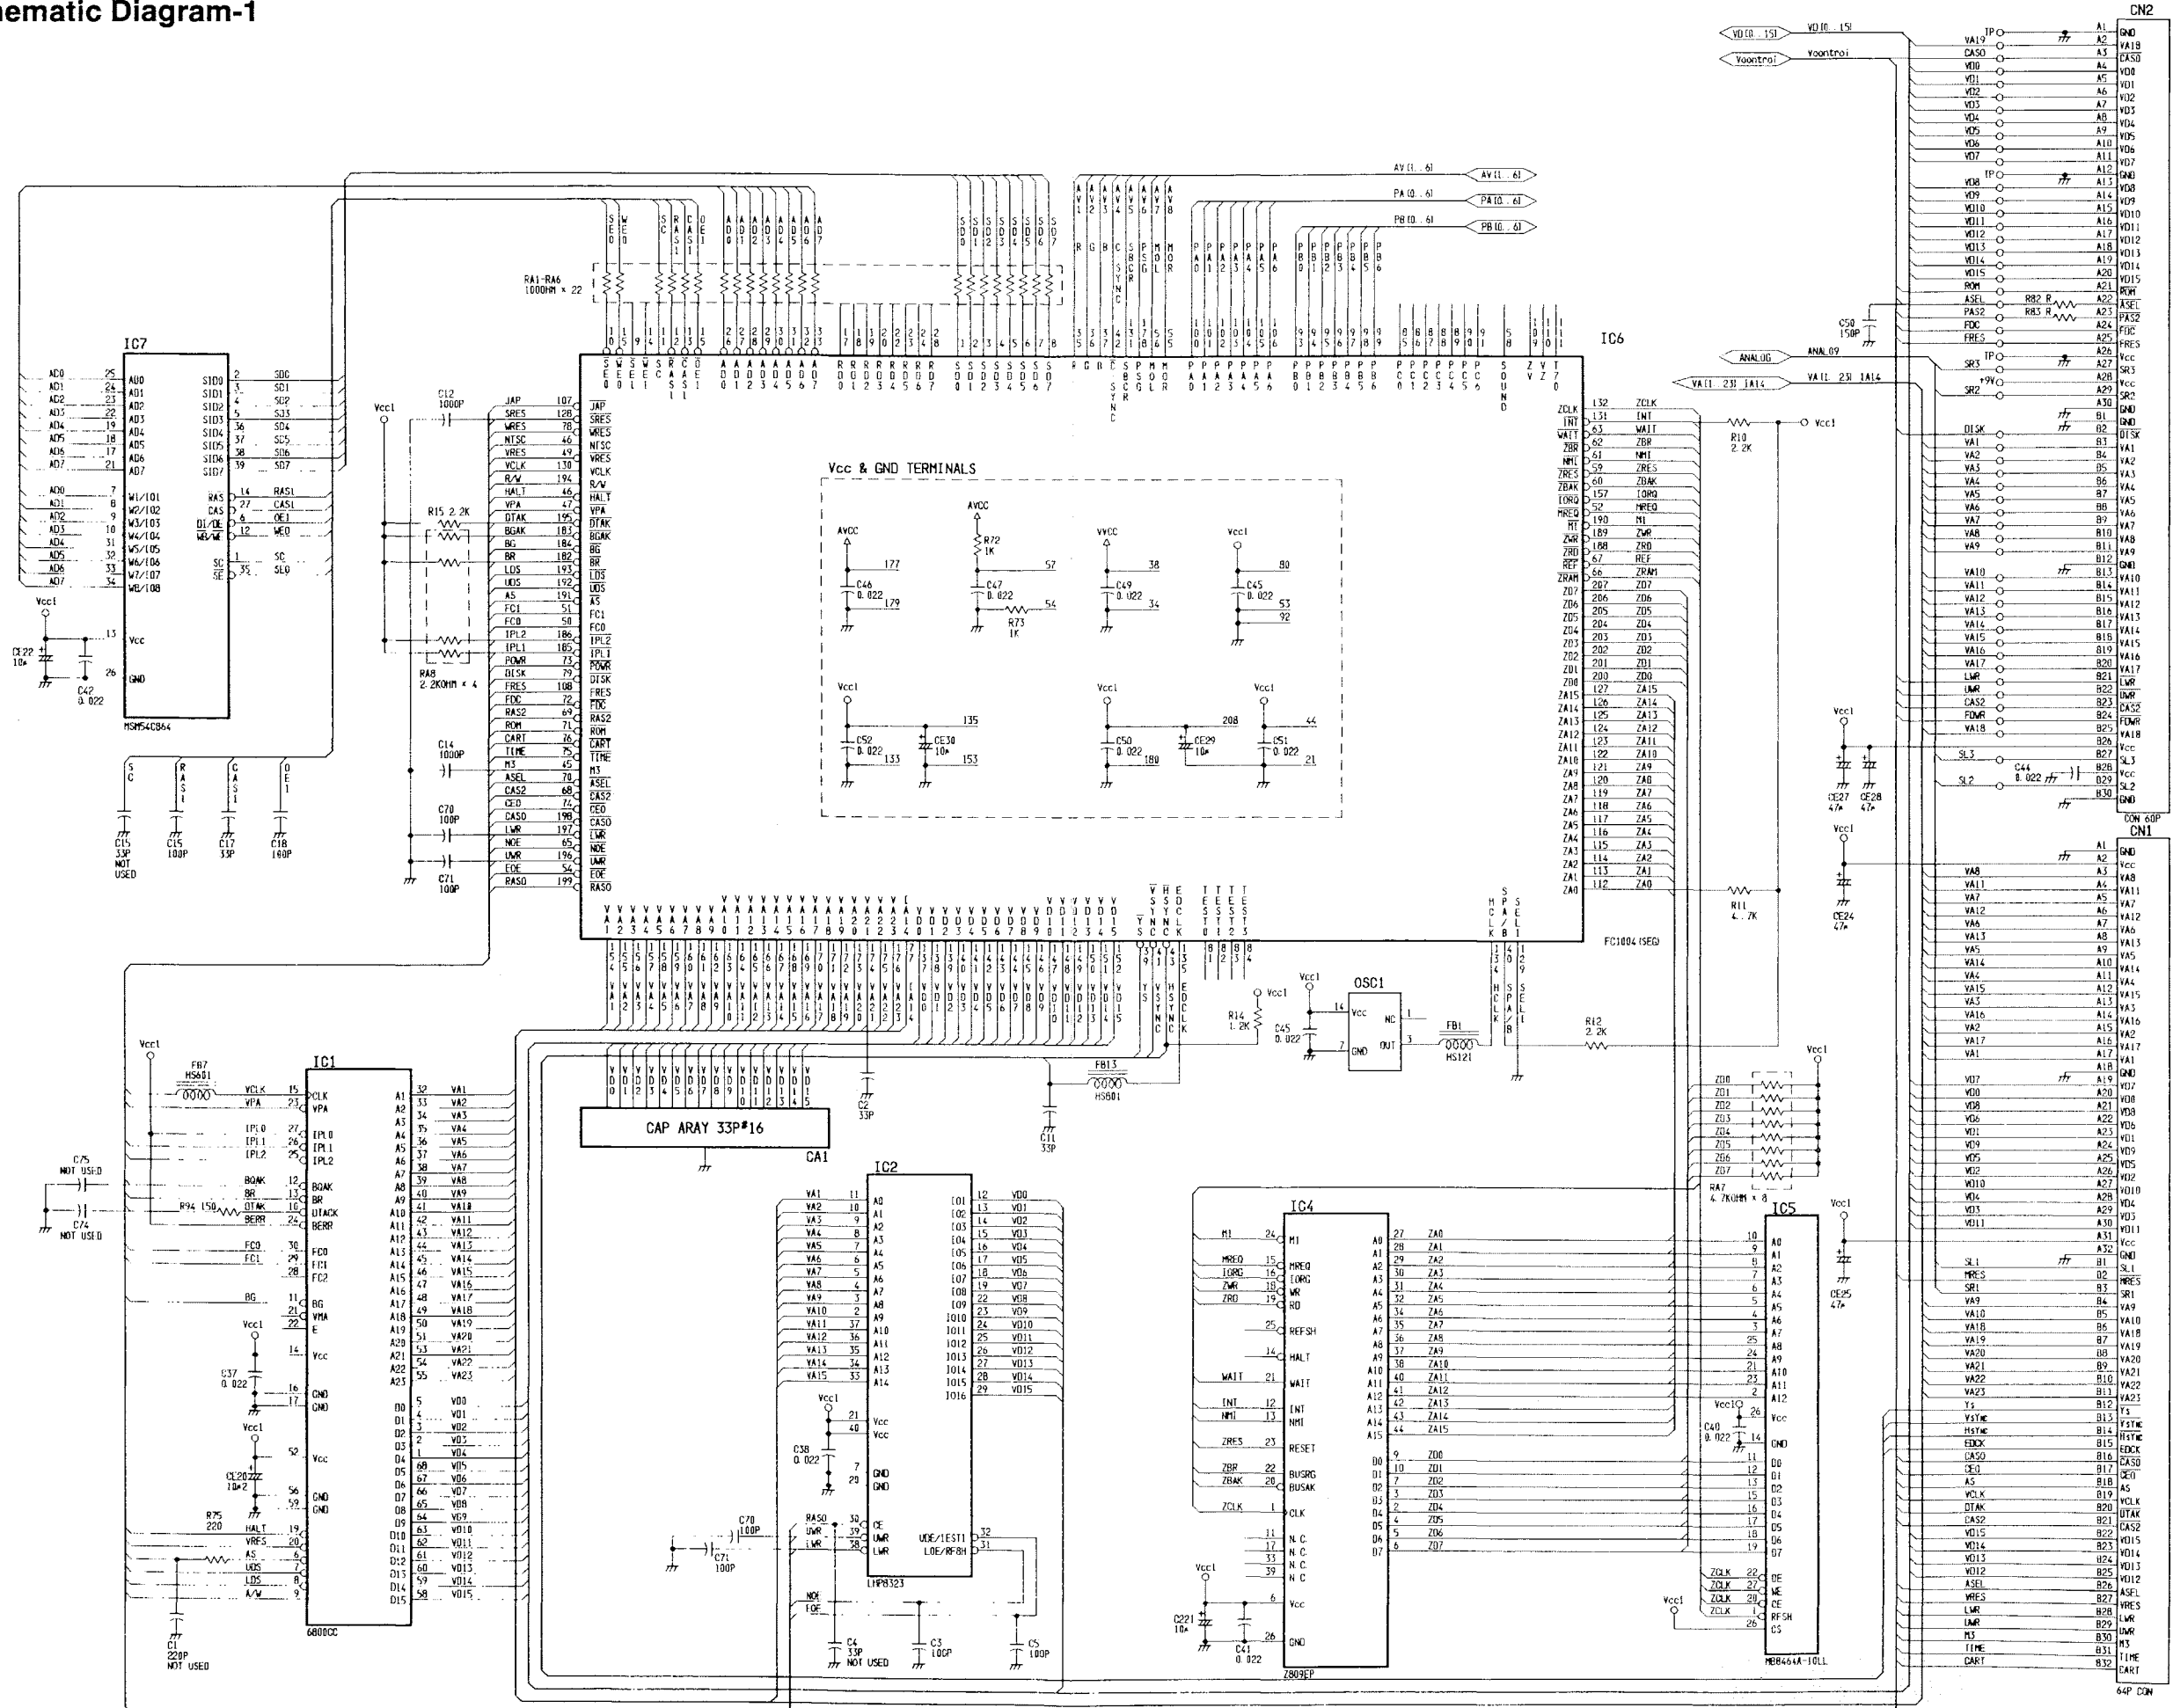


3-2. Schematic Diagram-2

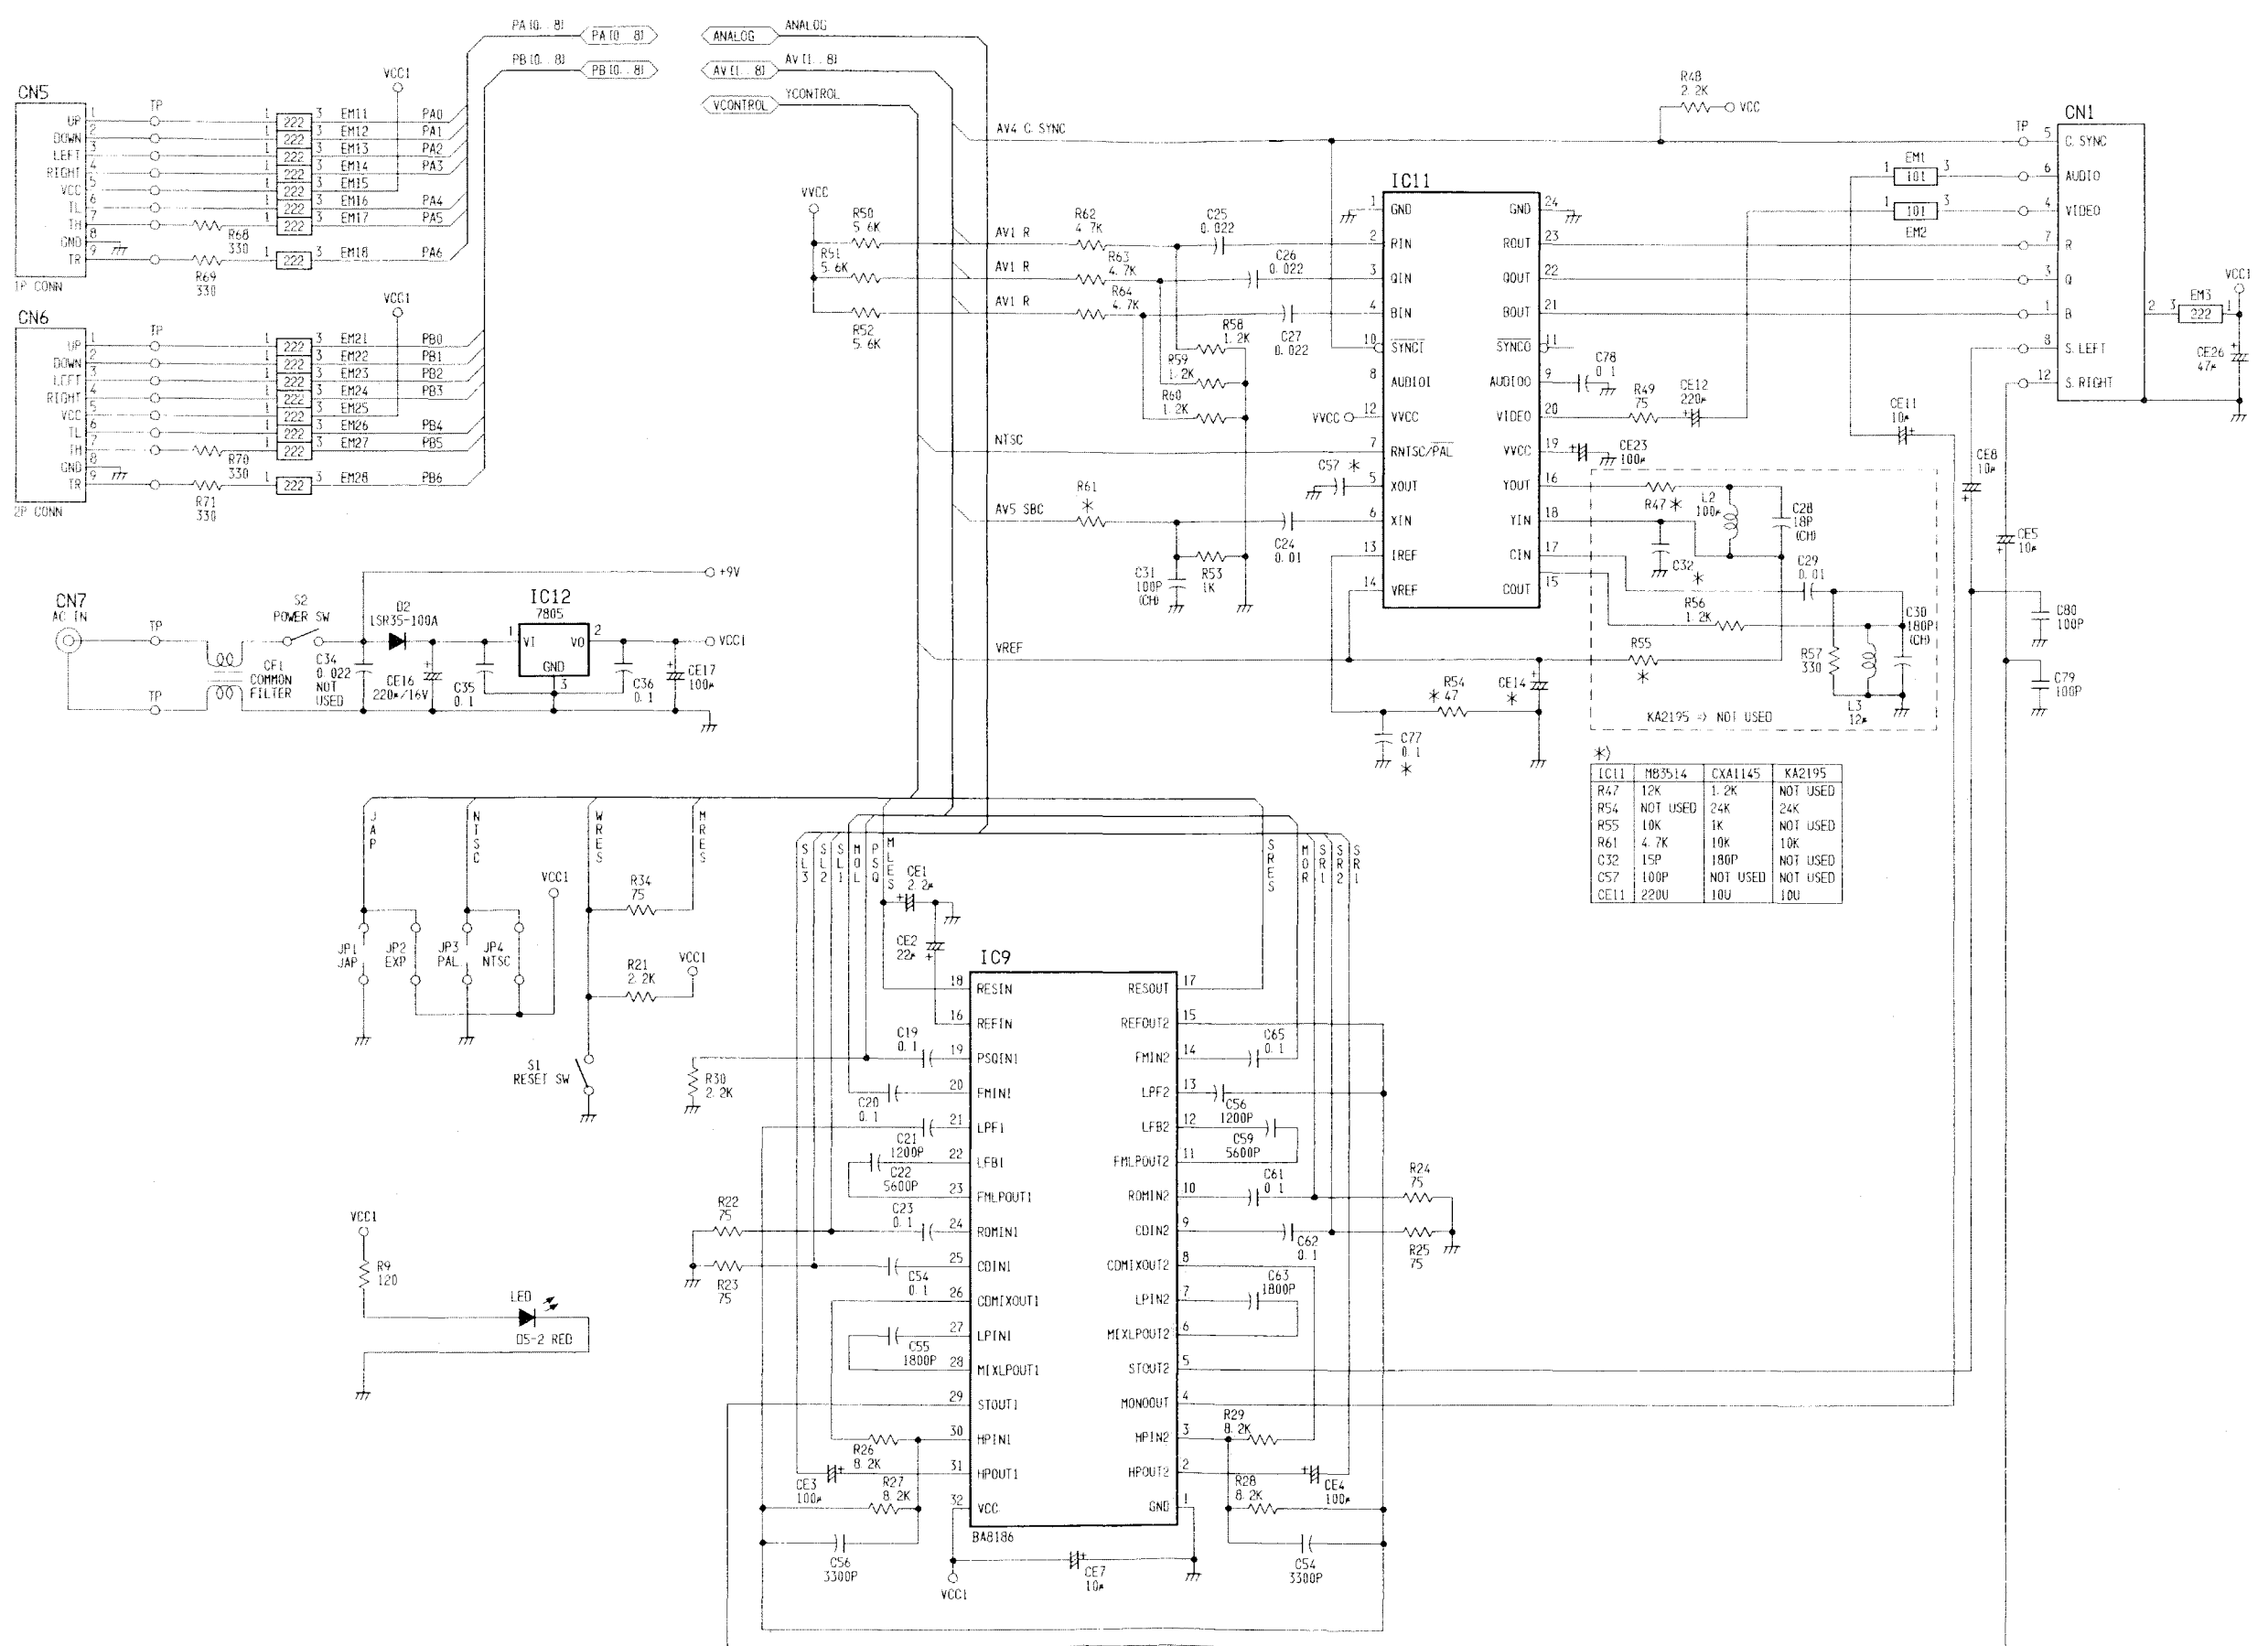


5. CIRCUIT BOARD DIAGRAM

5-1. Main Circuit Board (Top View)

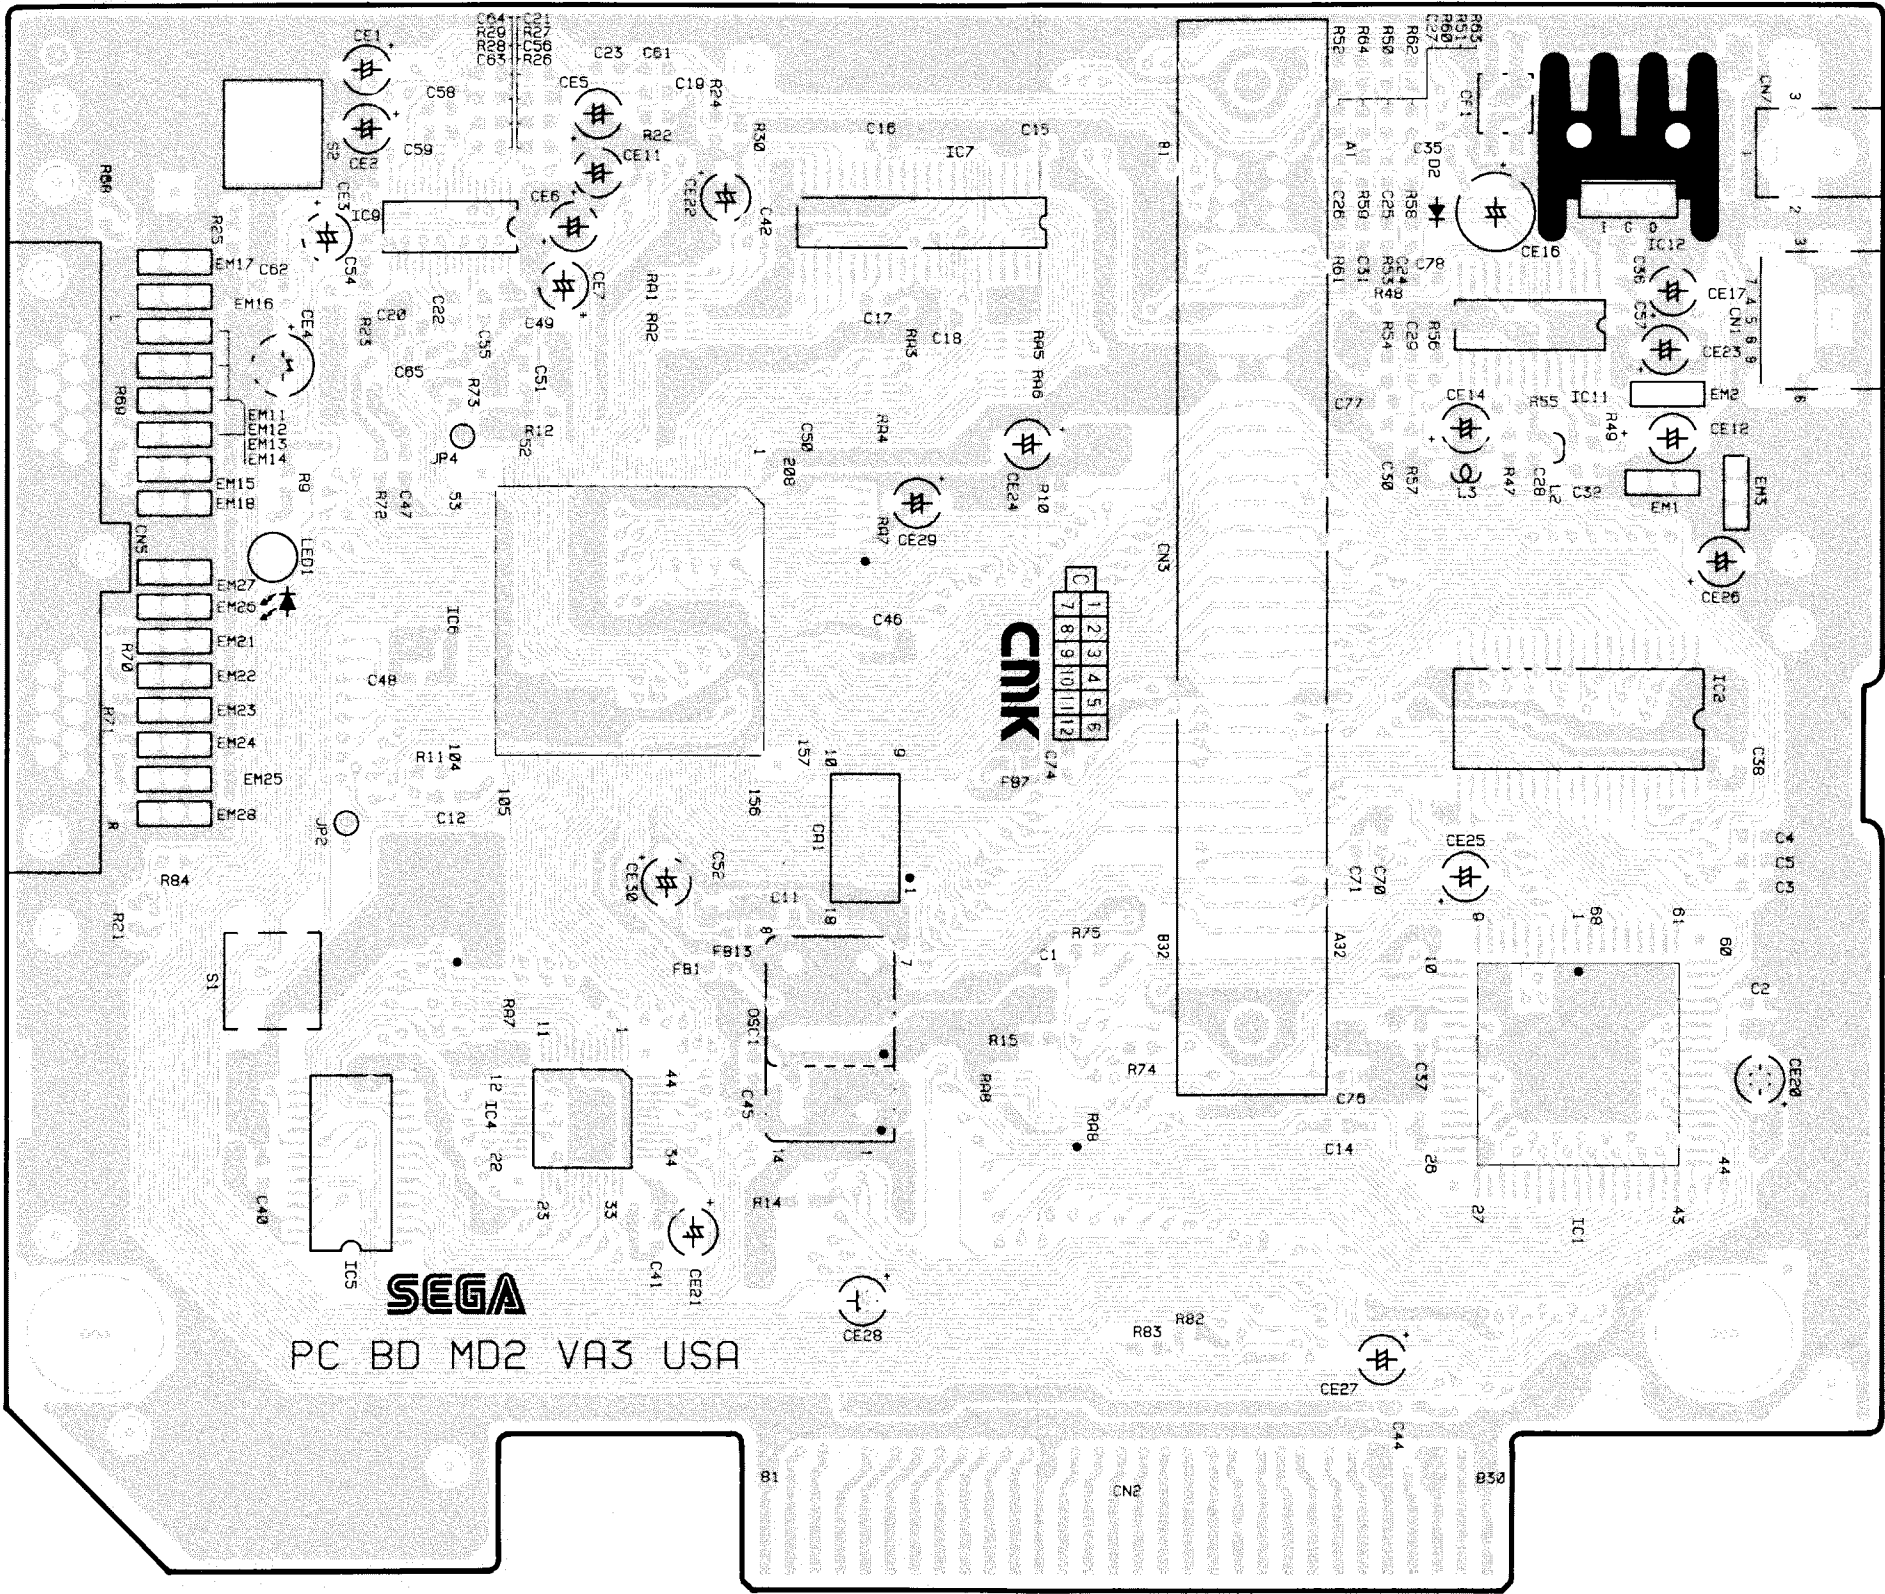

SEGA
PC BD MD2 VA3 USA

CNK

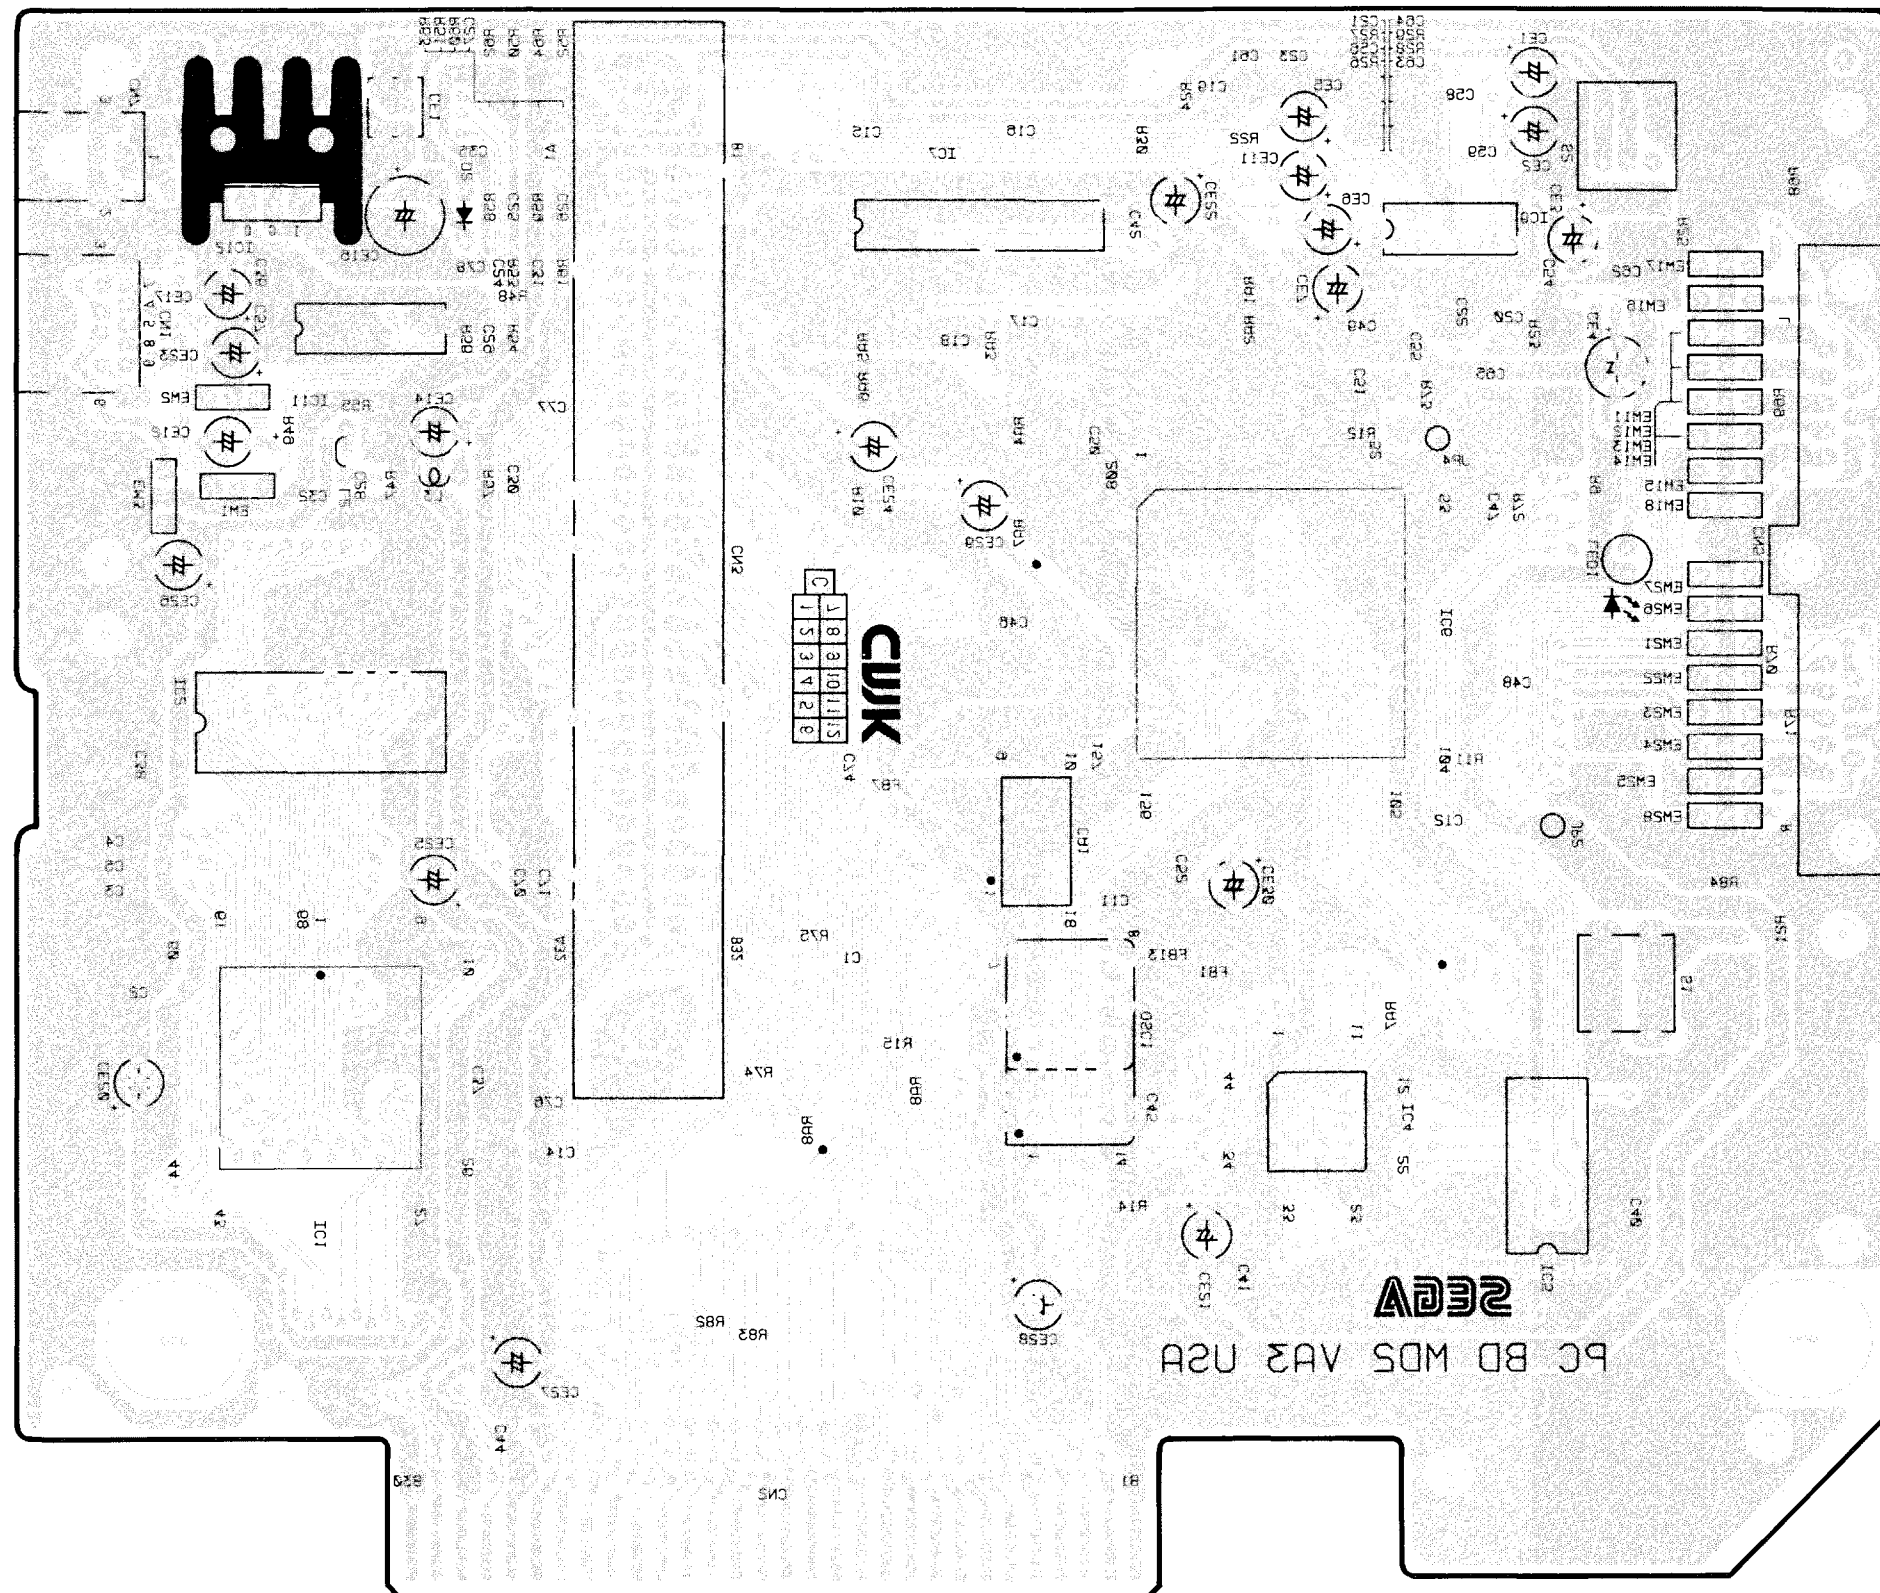


5. PARTS SPECIFICATIONS


IC9 Sound Network/Phones Amplifier

IC CUSTOM BA6166FS
Part No. : 315-5684

Top View

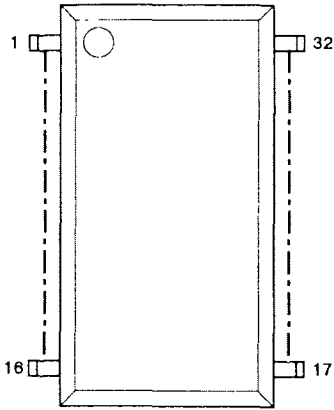


Pin Name & Block Diagram

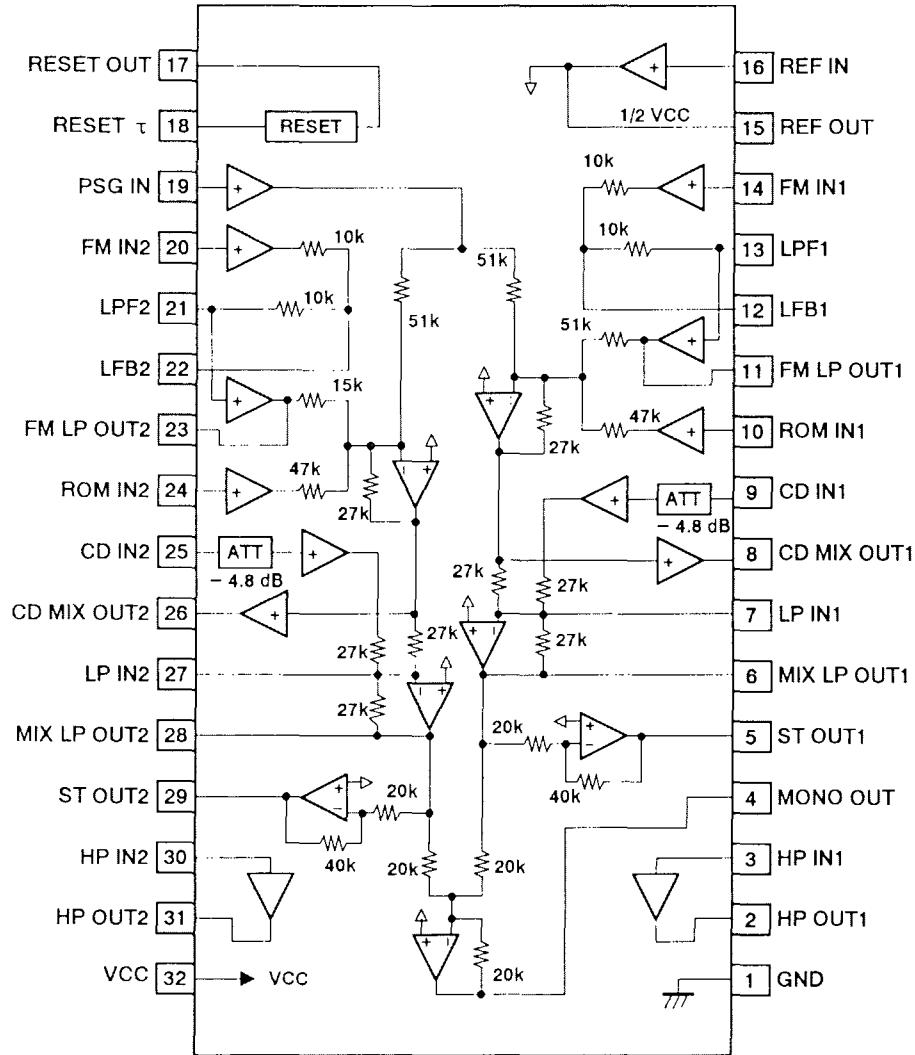

6. EXPLODED VIEW & PARTS LIST

6-1. Exploded View

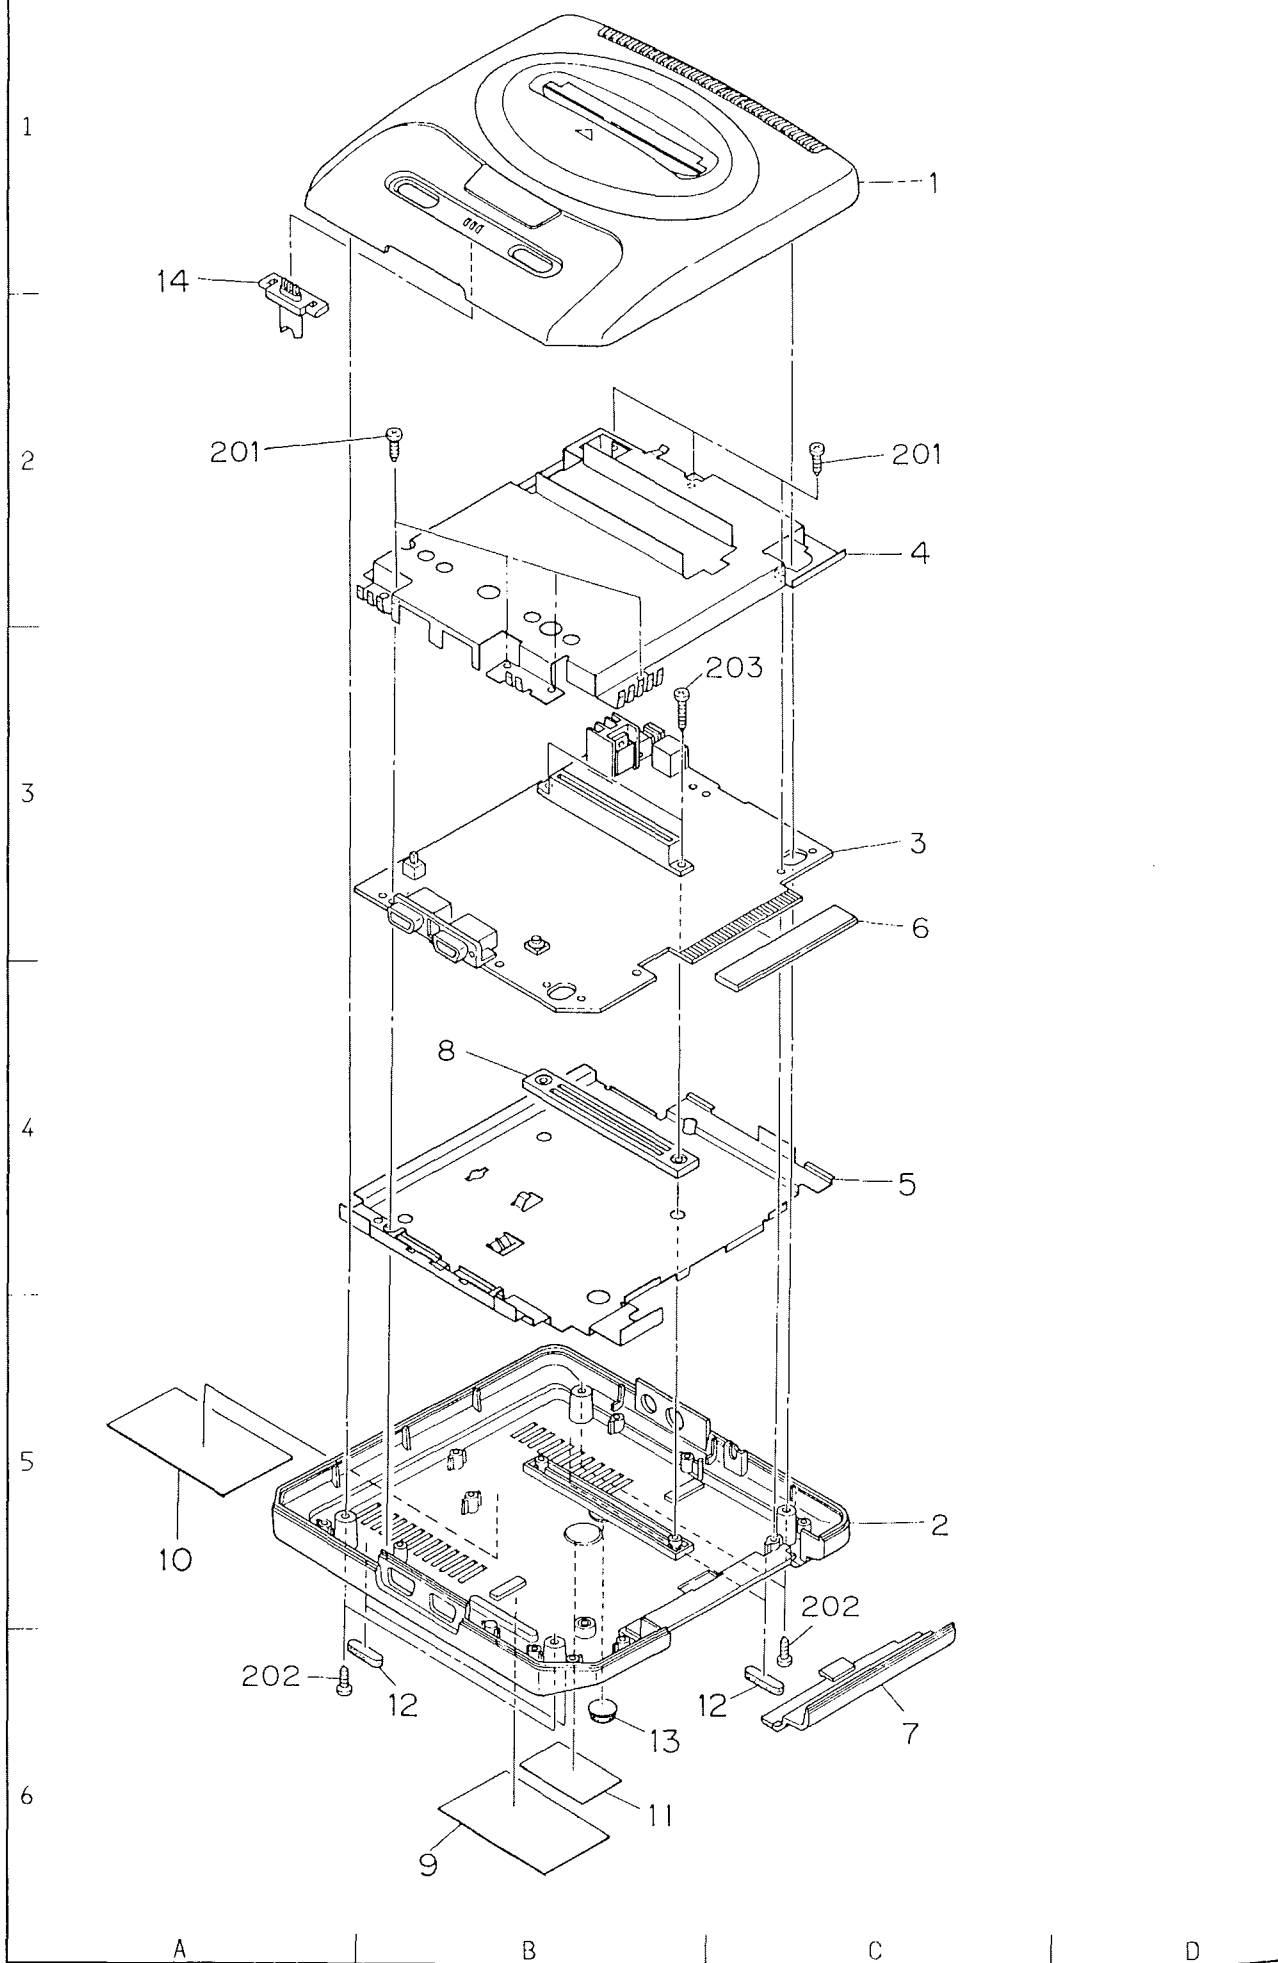

6-2. Mechanical Parts List

Ref. No.	Parts No.	Description
1	610-5479	ASSY TOP CASE GENESIS2 USA
1-1	253-6591	TOP CASE MD2 USA
1-1	253-6701	TOP CASE MD2 USA VA
1-2	253-6593	FRONT DOOR MD2 EXPORT
1-3	253-6594	BACK DOOR MD2 EXPORT
1-4	253-6499	COVER MD2
1-5	253-6595	POWER SW MD2 EXPORT
1-5	253-6595-A	POWER SW MD2 EXPORT VER2
1-6	253-6596	RESET SW MD2 EXPORT
1-7	125-5044	TORSTON SPRING M5
1-201	012-P00310	TAP SCR PH 3X10
2 1	253-6592	BOTTOM CASE MD2 EXPORT
2 2	253-6702	BOTTOM CASE MD2 EXPORT VA
2 3	253-6592A	BOTTOM CASE MD2 EXPORT ALPEX
2 4	253-6702A	BOTTOM CASE MD2 EXP VA ALPEX
3 1	837-10150-S	IC BD MD2 VA3S USA
3 2	837-10150-SM	IC BD MD2 VA3SM USA
3 3	837-10150-S2	IC BD MD2 VA3S2 USA
4	250-5359	TOP SHIELD MD2 EXPORT VA3
5	250-5360	BOTTOM SHIELD MD2 EXPORT VA3
6	253-6298	60P CARD EDGE COVER
7	253-6504	LID MD2
8	253-6599	64P COVER MD2 EXPORT
9	670-0248	SEAL CUSTOMER SERVICE
10	670-3128A	LABEL FCC SMITH & ALPEX GEN US
11	670-3129	LABEL SER. NO. MK-1630 USA
12	601-6973	RUBBER FOOT MD2
13	601-6974	RUBBER FOOT SJ-5012 BLACK
14	253-6598	LED LENS MD2 EXPORT
201	012-P00308	TAP SCR PH 3*8
202	012-P00310	TAP SCR PH 3X10
203	012-P00316-0B	TAP SCR PH BLK 3X16

6-3. Electrical Parts List

Circuit No.	Parts No.	Description
IC 1	315-0685	IC HD68HC000CP8 PLCC HITACHI
IC 1	315-0686	IC MC68HC000FN8R2 PLCC MOTORO
IC 2	315-0810	IC LH5P1632N-15 SOP40P SHARP
IC 2	315-0811	IC LC331632M-12 SOP 40P SANYO
IC 2	315-0812	IC HM651632DFP-15 SOP HITACHI
IC 2	315-0819	IC TC 511632FL-10 SOP TOSHIBA
IC 4	315-0738	IC Z84C0006 QFP ZILOG
IC 4	315-0782	IC TMP84C00AU-6 QFP TOSHIBA
IC 4	315-5676	IC CUSTOM UPD9033GB QFP NEC
IC 5	315-0546	IC UPD4364G-15L SOP 28P NEC
IC 5	315-0635	IC MB8464A-10LL PF-G-BND FUJIT
IC 5	315-0651	IC MB8464A-80 SOP 28P FUJITSU
IC 5	315-0753-10	IC LC3564PM-10L SOP SANYO
IC 5	315-0753-12	IC LC3564PM-12L SOP SANYO
IC 5	315-0754	IC KM6264BLG-10 28P SOP SAMSUN
IC 5	315-0755	IC KM6264BLG-10L 28P SOP SAMSU
IC 5	315-0766-10	IC LC3664BML-10H SOP SANYO
IC 5	315-0766-85	IC LC3664BML-85H SOP SANYO
IC 5	315-0773	IC CXK5864CM-70LL-T6 SOP SONY
IC 5	315-0830-10	IC MB8464H-10LL SOP FUJITSU
IC 5	315 0831-15	IC GM76C88ALFW-15 GOLD
IC 5	315-0926	IC MB8464H-90LPF SOP
IC 5	315-0926	IC XLJ6265AF-N10SL SOP
IC 5	315-0939	IC HY6264ALJ-10 SOP
IC 6	315-5660	IC CUSTOM CHIP FC1004 REV.YAMA
IC 6	315-5660-02	IC CUSTOM CHIP FC1004 YAMAHA
IC 7	315-0795-80	IC MSM54C864-80JS SOJ40P OKI
IC 7	315-0820	IC KM428C64J-10 SOJ SAMSUNG
IC 7	315-0850	IC HM53861J-8 SOJ HITACHI
IC 9	315-5684	IC CUSTOM CP BA6166FS SOP ROHM
IC 11	313-5213	IC CXA1145M SOP SONY
IC 11	313-5236	IC KA2195D SAMSUNG
IC 11	313-5314	IC CXA1645M SOP
IC 12	313-5214	IC UPC7805HF NEC
IC 12	313-5230	IC TA7805S TOSHIBA
D 2	481-5038-01	DIODE 1SR-35-100A RADIAL
CA 1	151-0401	C-PK CP 33P*16 W/Common TDK
CA 1	151-0401-02	C-PK CP 33P*16 W/Common TDK
CF 1	270-5065	COMMON FILTER CM04RC04 TAIYO
CF 1	270-5065-01	COMMON FILTER M-521CT TOKIN
CF 1	270-5065-02	COMMON FILTER ZJYS5102-2PB TDK
CF 1	270-0590	COMMON FILTER ZJYS5102P2P(T)S
CN 1	212-5364	MINI DIN CONN 9P TCS7913-43 HO
CN 1	212-5364-01	MINI DIN CONN 9P/C MD-S9200-90
CN 3	209-5026	EDGE CONNECTOR 64P MITSUMI
CN 3	209-5061	EDGE CONNECTOR 64P PSB4032K-7R
CN 3	209-5063	EDGE CONNECTOR 64P FUJITSU
CN 5	209-5066	D-SUB 9P*2 UC0082-21#10-0 YUNI
CN 5	209-5066-01	D-SUB 9P*2 IMSA-9402B-18A IRIS
CN 5	209-5066-02	D-SUB 9P*2 CAM-A29 MITSUMI
CN 7	212-5353	CONN DC JACK EIAJ3 HEC3100 HOS
CN 7	212-5353-01	CONN DC JACK EIAJ3 UC0086 UNIO
EM 1	271-0045	EMI FILTER STB101KB TAIYO
EM 1	271-0045-02	EMI FILTER DSS306-93B101M100 M
EM 1	271-0045-04	EMI FILTER ED31-B101M TOKIN
EM 2	271-0045	EMI FILTER STB101KB TAIYO
EM 2	271-0045-02	EMI FILTER DSS306-93B101M100 M
EM 2	271-0045-04	EMI FILTER ED31-B101M TOKIN
EM 3	271-0007	EMI FILTER STX222MB TAIYO
EM 3	271-0007-02	EMI FILTER DSS306-93E222Z100 M
EM 3	271-0007-04	EMI FILTER ED31-B222M TOKIN

[A]
[B]
[C]

[NOTE] A...837-10150-S B...837-10150-SM C...837-10150-S2

Circuit No.	Parts No.	Description	Circuit No.	Parts No.	Description
EM 11	271-0007	EMI FILTER STX222MB TAIYO	JP 1	600-5941-40	CA VINYL AWG22 UL1430 L=40MM
EM 11	271-0007-02	EMI FILTER DSS306-93E222Z100 M	JP 2	600-5941-40	CA VINYL AWG22 UL1430 L=40MM
EM 11	271-0007-04	EMI FILTER ED31-B222M TOKIN	L 2	180-5060	PEAKING COIL 100UH 03RA TAIYO [A]
EM 12	271-0007	EMI FILTER STX222MB TAIYO	L 2	180-5060-02	PEAKING COIL 100UH ELEXL101KA [A]
EM 12	271-0007-02	EMI FILTER DSS306-93E222Z100 M	L 2	180-5060-03	PEAKING COIL 100UH LF5.0S101K [A]
EM 12	271-0007-04	EMI FILTER ED31-B222M TOKIN	L 2	NOT USED	NOT USED [B, C]
EM 13	271-0007	EMI FILTER STX222MB TAIYO	L 3	180-5059	PEAKING COIL 12UH LAL03 TAIYO [A, C]
EM 13	271-0007-02	EMI FILTER DSS306-93E222Z100 M	L 3	180-5059-02	PEAKING COIL 12UH ELEXL120KA [A, C]
EM 13	271-0007-04	EMI FILTER ED31-B222M TOKIN	L 3	180-5059-03	PEAKING COIL 12UH LF5.0S120K [A, C]
EM 14	271-0007	EMI FILTER STX222MB TAIYO	L 3	NOT USED	NOT USED [B]
EM 14	271-0007-02	EMI FILTER DSS306-93E222Z100 M	LED 1	390-5234	LED GL3PR8
EM 14	271-0007-04	EMI FILTER ED31-B222M TOKIN	OSC 1	230-5053	OSC 53.693175MHZ 20PPM TQC
EM 15	271-0007	EMI FILTER STX222MB TAIYO	OSC 1	230-5053-01D	XTAL OSC 53.693175 MC0-7020D-1
EM 15	271-0007-02	EMI FILTER DSS306-93E222Z100 M	OSC 1	230-5053-02B	XTAL OSC 53.693175M 20PPM CXO
EM 15	271-0007-04	EMI FILTER ED31-B222M TOKIN	OSC 1	230-5053-04	XTAL OSC 53.693M CK5545AC TEW
EM 16	271-0007	EMI FILTER STX222MB TAIYO	OSC 1	230-5053-05	XTAL OSC 53.693175M 20PPM ADO
EM 16	271-0007-02	EMI FILTER DSS306-93E222Z100 M	S 1	509-5207	TACT SW SKEVAA ALPS
EM 16	271-0007-04	EMI FILTER ED31-B222M TOKIN	S 1	510-5019	TACTILE PUSH SW SKEVAA
EM 17	271-0006	EMI FILTER STB271KB TAIYO	S 2	510-5046	PUSH SW JPK0010-Z091 SMK
EM 17	271-0006-02	EMI FILTER DSS306-93B271M100 M	S 2	510-5046-01	PUSH SW HPW1261-010010 HOSIDEN
EM 17	271-0006-04	EMI FILTER ED31-B271M TOKIN	SL CN5C	090-0012	SCREW LOCK
EM 18	271-0007	EMI FILTER STX222MB TAIYO	SL CN5L	090-0012	SCREW LOCK
EM 18	271-0007-02	EMI FILTER DSS306-93E222Z100 M	SL CN5R	090-0012	SCREW LOCK
EM 18	271-0007-04	EMI FILTER ED31-B222M TOKIN	TS CN5C	012-P00308	TAP SCR PH 3*8
EM 21	271-0007	EMI FILTER STX222MB TAIYO	TS CN5L	012-P00308	TAP SCR PH 3*8
EM 21	271-0007-02	EMI FILTER DSS306-93E222Z100 M	TS CN5R	012-P00308	TAP SCR PH 3*8
EM 21	271-0007-04	EMI FILTER ED31-B222M TOKIN	RA 1	477-0136	R-PK CP 4*100 OHM 1/16W 5% K
EM 22	271-0007	EMI FILTER STX222MB TAIYO	RA 1	477-0136-01	R-PK CP 4*100 OHM NCR164101J
EM 22	271-0007-02	EMI FILTER DSS306-93E222Z100 M	RA 2	477-0136	R-PK CP 4*100 OHM 1/16W 5% K
EM 22	271-0007-04	EMI FILTER ED31-B222M TOKIN	RA 2	477-0136-01	R-PK CP 4*100 OHM NCR164101J
EM 23	271-0007	EMI FILTER STX222MB TAIYO	RA 3	477-0139	R-PK CP 2*100 OHM 1/16W 5%
EM 23	271-0007-02	EMI FILTER DSS306-93E222Z100 M	RA 3	477-0139-01	R-PK CP 2*100 OHM MCR162101J
EM 23	271-0007-04	EMI FILTER ED31-B222M TOKIN	RA 4	477-0136	R-PK CP 4*100 OHM 1/16W 5% K
EM 24	271-0007	EMI FILTER STX222MB TAIYO	RA 4	477-0136-01	R-PK CP 4*100 OHM NCR164101J
EM 24	271-0007-02	EMI FILTER DSS306-93E222Z100 M	RA 5	477-0136	R-PK CP 4*100 OHM 1/16W 5% K
EM 24	271-0007-04	EMI FILTER ED31-B222M TOKIN	RA 5	477-0136-01	R-PK CP 4*100 OHM NCR164101J
EM 25	271-0007	EMI FILTER STX222MB TAIYO	RA 6	477-0136	R-PK CP 4*100 OHM 1/16W 5% K
EM 25	271-0007-02	EMI FILTER DSS306-93E222Z100 M	RA 6	477-0136-01	R-PK CP 4*100 OHM NCR164101J
EM 25	271-0007-04	EMI FILTER ED31-B222M TOKIN	RA 7	477-0132	R-PK CP 8*4.7KOHM W/COMM.
EM 26	271-0007	EMI FILTER STX222MB TAIYO	RA 7	477-0166	RES PACK CP 8*4.7KOHM 1/16W 5%
EM 26	271-0007-02	EMI FILTER DSS306-93E222Z100 M	RA 7	477-0166-02	R-PK CP 8*4.7KOHM 1/16W 5% W/C [A]
EM 26	271-0007-04	EMI FILTER ED31-B222M TOKIN	RA 8	477-0148	R-PK CP 4*2.2KOHM W/COMM.
EM 27	271-0006	EMI FILTER STB271KB TAIYO	RA 8	477-0167	R-PK CP 4*2.2KOHM 1/16W 5%
EM 27	271-0006-02	EMI FILTER DSS306-93B271M100 M	RA 8	477-0167-02	R-PK CP 4*2.2KOHM 1/16W 5% [A]
EM 27	271-0006-04	EMI FILTER ED31-B271M TOKIN	R 9	476-2121-J-10	RES CHIP 120 OHM 1/10W 5%
EM 28	271-0007	EMI FILTER STX222MB TAIYO	R 10	476-2222-J-10	RES CHIP 2.2KOHM 1/10W 5%
EM 28	271-0007-02	EMI FILTER DSS306-93E222Z100 M	R 11	476-2472-J-10	RES CHIP 4.7KOHM 1/10W 5%
EM 28	271-0007-04	EMI FILTER ED31-B222M TOKIN	R 12	476-2222-J-10	RES CHIP 2.2KOHM 1/10W 5%
EYLET	CN3079-000003	EYLET 3.5*7	R 14	476-2122-J-10	RES CHIP 1.2KOHM 1/10W 5%
EYLET	CN3079-000005	EYLET 6*3.5*8	R 15	476-2222-J-10	RES CHIP 2.2KOHM 1/10W 5%
EYLET	CN5079-000001	EYLET 2.3*7	R 21	476-2222-J-10	RES CHIP 2.2KOHM 1/10W 5%
FB 1	271-0044	BEADS INDUCTOR CP BK2125 HS121	R 22	476-2750-J-10	RES CHIP 75 OHM 1/10W 5%
FB 1	271-0044-01	BEADS INDUCTOR CP BLM21A05 MUR	R 23	476-2750-J-10	RES CHIP 75 OHM 1/10W 5%
FB 1	271-0044-02	BEADS INDUCTOR CP 120 OHM TDK	R 24	476-2750-J-10	RES CHIP 75 OHM 1/10W 5%
FB 7	271-0043	BEADS INDUCTOR CP BK2125 HS601	R 25	476-2750-J-10	RES CHIP 75 OHM 1/10W 5%
FB 7	271-0043-01	BEADS INDUCTOR CP BLM21A10 MUR	R 26	476-2822-J-10	RES CHIP 8.2KOHM 1/10W 5%
FB 7	271-0043-02	BEADS INDUCTOR CP 600 OHM TDK	R 27	476-2822-J-10	RES CHIP 8.2KOHM 1/10W 5%
FB 13	271-0043	BEADS INDUCTOR CP BK2125 HS601	R 28	476-2822-J-10	RES CHIP 8.2KOHM 1/10W 5%
FB 13	271-0043-01	BEADS INDUCTOR CP BLM21A10 MUR	R 29	476-2822-J-10	RES CHIP 8.2KOHM 1/10W 5%
FB 13	271-0043-02	BEADS INDUCTOR CP 600 OHM TDK	R 30	476-2222-J-10	RES CHIP 2.2KOHM 1/10W 5%

[NOTE] A...837-10150-S B...837-10150-SM C...837-10150-S2

Circuit No.	Parts No.	Description		Circuit No.	Parts No.	Description	
R 47 R 47	476 2122-J-10 NOT USED	RES CHIP 1.2KOHM 1/10W 5% NOT USED	[A] [B, C]	C 31	151-0354	CAP CER CP 100PF 50V CH2125	
R 48	476-2222-J-10	RES CHIP 2.2KOHM 1/10W 5%		C 32	151-0309	CAP CER CP 180PF 50V CH2125	[A]
R 49	476 2750 J 10	RES CHIP 75 OHM 1/10W 5%		C 32	NOT USED	NOT USED	[B]
R 50	476-2562-J-10	RES CHIP 5.6KOHM 1/10W 5%		C 32	476-2203-J-10	RES CHIP 20KOHM 1/10W 5%	[C]
R 51	476-2562-J-10	RES CHIP 5.6KOHM 1/10W 5%		C 33	NOT USED	NOT USED	[A, C]
R 52	476-2562-J-10	RES CHIP 5.6KOHM 1/10W 5%		C 34	NOT USED	NOT USED	[A, C]
R 53	476 2102 J 10	RES CHIP 1KOHM 1/10W 5%		C 35	151-0265	CAP CER CP 0.1UF 25V ZF2125	
R 54	476 2243 J 10	RES CHIP 24KOHM 1/10W 5%		C 36	151-0265	CAP CER CP 0.1UF 25V ZF2125	
R 55	476-2102-J-10	RES CHIP 1KOHM 1/10W 5%	[A]	C 37	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 55	NOT USED	NOT USED	[B, C]	C 38	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 56	476-2122-J-10	RES CHIP 1.2KOHM 1/10W 5%	[A]	C 40	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 56	NOT USED	NOT USED	[B, C]	C 41	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 57	476 2331-J-10	RES CHIP 330 OHM 1/10W 5%	[A]	C 42	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 57	NOT USED	NOT USED	[B, C]	C 44	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 58	476-2122-J-10	RES CHIP 1.2KOHM 1/10W 5%		C 45	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 59	476-2122-J-10	RES CHIP 1.2KOHM 1/10W 5%		C 46	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 60	476-2122-J-10	RES CHIP 1.2KOHM 1/10W 5%		C 47	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 61	476-2103-J-10	RES CHIP 10KOHM 1/10W 5%		C 48	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 62	476-2472-J-10	RES CHIP 4.7KOHM 1/10W 5%		C 49	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 63	476-2472-J-10	RES CHIP 4.7KOHM 1/10W 5%		C 50	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 64	476-2472-J-10	RES CHIP 4.7KOHM 1/10W 5%		C 51	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 68	476-2331-J-10	RES CHIP 330 OHM 1/10W 5%		C 52	151-0307	CAP CER CP 0.022UF 50V ZF2125	
R 69	476-2331-J-10	RES CHIP 330 OHM 1/10W 5%		C 54	151-0265	CAP CER CP 0.1UF 25V ZF2125	
R 70	476-2331-J-10	RES CHIP 330 OHM 1/10W 5%		C 55	151 0353	CAP CER CP 1800PF 50V KB2125	
R 71	476-2331-J-10	RES CHIP 330 OHM 1/10W 5%		C 56	151-0499	CAP CER CP 3300PF 50V KB2125	
R 72	476-2511-J-10	RES CHIP 510 OHM 1/10W 5%		C 57	NOT USED	NOT USED	[A, B, C]
R 73	476 2511-J-10	RES CHIP 510 OHM 1/10W 5%		C 58	151-0498	CAP CER CP 1200PF 50V KB2125	
R 74	476 2151-J-10	RES CHIP 150 OHM 1/10W 5%		C 59	151-0311	CAP CER CP 5600PF 50V KB2125	
R 75	476 2221-J-10	RES CHIP 220 OHM 1/10W 5%		C 61	151-0265	CAP CER CP 0.1UF 25V ZF2125	
R 82	479-5005-0000	RES CHIP 0 OHM 1/10W 2125		C 62	151-0265	CAP CER CP 0.1UF 25V ZF2125	
R 83	479-5005-0000	RES CHIP 0 OHM 1/10W 2125		C 63	151-0353	CAP CER CP 1800PF 50V KB2125	
R 84	476-2750-J-10	RES CHIP 75 OHM 1/10W 5%	[A, B]	C 64	151-0499	CAP CER CP 3300PF 50V KB2125	
R 84	NOT USED	NOT USED	[C]	C 65	151-0265	CAP CER CP 0.1UF 25V ZF2125	
C 1	NOT USED	NOT USED		C 70	151-0372	CAP CER CP 33PF 50V CH2125	
C 2	151-0372	CAP CER CP 33PF 50V CH2125		C 71	151-0372	CAP CER CP 33PF 50V CH2125	
C 3	151-0354	CAP CER CP 100PF 50V CH2125		C 74	NOT USED	NOT USED	
C 4	NOT USED	NOT USED		C 76	NOT USED	NOT USED	
C 5	151-0354	CAP CER CP 100PF 50V CH2125		C 77	NOT USED	NOT USED	
C 11	151-0372	CAP CER CP 33PF 50V CH2125		C 77	151-0265	CAP CER CP 0.1UF 25V ZF2125	[C]
C 12	151-0305	CAP CER CP 1000PF 50V KB2125		C 78	NOT USED	NOT USED	
C 14	151-0305	CAP CER CP 1000PF 50V KB2125		C 78	151-0265	CAP CER CP 0.1UF 25V ZF2125	[C]
C 15	NOT USED	NOT USED		C 79	151-0354	CAP CER CP 100PF 50V CH2125	
C 16	151-0354	CAP CER CP 100PF 50V CH2125		C 80	151-0354	CAP CER CP 100PF 50V CH2125	
C 17	151-0372	CAP CER CP 33PF 50V CH2125		CE 1	150-0039	CAP E 2.2UF 50V U-TYPE	
C 18	151-0354	CAP CER CP 100PF 50V CH2125		CE 2	150-0437	CAP E 22UF 50V	
C 19	151-0265	CAP CER CP 0.1UF 25V ZF2125		CE 3	150-0047	CAP E 100UF 10V U-TYPE	
C 20	151-0265	CAP CER CP 0.1UF 25V ZF2125		CE 4	150-0047	CAP E 100UF 10V U-TYPE	
C 21	151-0498	CAP CER CP 1200PF 50V KB2125		CE 5	150-0023	CAP E 10UF 16V U-TYPE 20%	
C 22	151-0311	CAP CER CP 5600PF 50V KB2125		CE 6	150-0023	CAP E 10UF 16V U-TYPE 20%	
C 23	151-0265	CAP CER CP 0.1UF 25V ZF2125		CE 7	150 0023	CAP E 10UF 16V U-TYPE 20%	
C 24	151 0312	CAP CER CP 0.01UF 50V KB2125		CE 11	150-0023	CAP E 10UF 16V U-TYPE 20%	
C 25	151 0307	CAP CER CP 0.022UF 50V ZF2125		CE 12	150-0412	CAP E 220UF 6.3V U-TYPE	
C 26	151 0307	CAP CER CP 0.022UF 50V ZF2125		CE 14	150-0023	CAP E 10UF 16V U-TYPE 20%	[A, B]
C 27	151-0307	CAP CER CP 0.022UF 50V ZF2125		CE 14	NOT USED	NOT USED	[C]
C 28	151-0308	CAP CER CP 18PF 50V CH2125	[A]	CE 16	150-0159	CAP E 220UF 16V U-TYPE	
C 28	NOT USED	NOT USED	[B, C]	CE 17	150 0047	CAP E 100UF 10V U-TYPE	
C 29	151-0312	CAP CER CP 0.01UF 50V KB2125	[A]	CE 20	150-0023	CAP E 10UF 16V U-TYPE 20%	
C 29	NOT USED	NOT USED	[B]	CE 21	150-0023	CAP E 10UF 16V U-TYPE 20%	
C 29	151-0363	CAP CER CP 47PF 50V CH2125	[C]	CE 22	150 0023	CAP E 10UF 16V U-TYPE 20%	
C 30	151-0309	CAP CER CP 180PF 50V CH2125	[A]	CE 23	150-0047	CAP E 100UF 10V U-TYPE	
C 30	NOT USED	NOT USED	[B, C]	CE 24	150-0062	CAP E 47UF 10V U-TYPE	
				CE 25	150-0062	CAP E 47UF 10V U-TYPE	
				CE 26	150-0062	CAP E 47UF 10V U-TYPE	

[NOTE] A...837-10150 S B...837-10150-SM C...837-10150-S2

6-4. Accessories/Package List

Circuit No.	Parts No.	Description	No.	Parts No.	Description
CE 27	150-0062	CAP E 47UF 10V U-TYPE	1	610-5517-01	ASSY CP M5 USA
CE 28	150-0062	CAP E 47UF 10V U-TYPE			
CE 29	150-0023	CAP E 10UF 16V U-TYPE 20%	2	400-5135A	AC ADAPTOR AC120V/DC10V 0.85A
CE 30	150-0023	CAP E 10UF 16V U-TYPE 20%	2	400-5135A-01	AC ADAPTOR AC120V/DC10V 0.85A
			2	400-5135A-02	AC ADAPTOR AC120V/DC10V 0.85A
			2	400 5135A-03	AC ADAPTOR AC120V/DC10V 0.85A
			3	610-5472	RF UNIT GEN2 MDU-VA3431 MITSUM
			3	610-5472-01	RF UNIT GEN2 MDQT2A801A ALPS
			3	610-5472-02	RF UNIT GEN2 TOWA NTSC
			4	670-5062	OPER CELL MANUAL GEN2 USA
			4	670-5062-01	OPER CELL MANUAL GEN2 USA 01
			5	671-5020-02	B&P SET GEN2 USA 1630 PM S
			5	671-5021-02	B&P SET GEN2 USA 1630 DF S
			5	671-5020-01	B&P SET GEN2 USA 1614 PM S
			5	671-5021-01	B&P SET GEN2 USA 1614 DP S
			6	671-5005-02	MA CTN GEN2 USA 1630 S
			6	671-5005-01	MA CTN GEN2 USA 1614 S
			7	SGM-4216	POLY BAG 260*320*0.05 EXP 6
			8	SGM-4217	POLY BAG 200*300*0.05 EXP 6
			9	670-3264-02	BUSINESS REPLY MAIL GEN2 US 02
			9	670-3264-01	BUSINESS REPLY MAIL GEN2 US 01
			10	670-4845-01	CROSS SELL POSTER USA
			11	670-3284	PARTS ORDER FORM GEN2 USA
			12	670-4205	PERIPHERAL CATALOG GEN2 USA
			13	TAPE	SECURITY TAPE

【NOTE】 A·····837-10150-S B·····837-10150-SM C·····837-10150-S2

