



SCPH-30001 R
SCPH-30002 R
SCPH-30003 R
SCPH-30004 R
SCPH-30005 R
SCPH-30006 R
SCPH-30007 R

SCPH-30000 R series

SERVICE MANUAL

4th Edition

for GH015(12/22) MOUNT (F-type model)

PlayStation®2



Sony Computer Entertainment Inc.
Quality Assurance Department
Published in Japan ©12.2001. 9-927-093-51

NOTICE

Copyright by Sony Computer Entertainment Inc. All rights reserved. No reproduced and transferred required except permission by Sony Computer Entertainment Inc. No commercial use and rental required.

REVISIONS.

This manual compiled by second edition of SCPH-30000 R series D type and F type models design data. Design and Specification will be subject to changed without notice. The latest versions of service manual, Technical memo, Technical information should be used together.

SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY MARK $\triangle$ OR DOTTED LINE WITH MARK $\triangle$ ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ !

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE $\triangle$ SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS UBLIÉS PAR SONY.

CAUTION

Replace the battery with a Sony CR2032 battery. Use of any other type of battery may present the risk of fire or explosion. The battery may explode if mistreated. Do not recharge, disassemble, or dispose of in fire.

CAUTION

The use of optical instruments with this product will increase eye Hazard. As the laser beam used in this CD/DVD player is harmful To eyes, do not attempt to disassemble the cabinet. Refer servicing to qualified personnel only.

WARNING !!

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 25cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION for electric shock

When power is ON, Don't touch to Power supply block, AC-inlet, Power switch and so on, not to get an electric shock at repair.

CAUTION for burning

When current is supplied, Some of part surface temperature like EE, GS, Regulator-IC, power supply, Optical device and so on. These part surface is become high temperature condition. When it repair, Don't touch them at a time during it surface is high temperature condition to take prevent against burning. Do repair after it is cooled down enough.

CAUTION

Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

ADVARSEL!

Lithiumbatteri - Eksplosionsfare ved fejlagtig håndtering. Udskiftning må kun ske med batteri af samme fabrikat og type. Levér det brugte batteri tilbage til leverandøren.

ADVARSEL

Eksplosjonsfare ved feilaktig skifte av batteri. Benytt samme batteritype eller en tilsvarende type anbefalt av apparatfabrikanten. Brukte batterier kasseres i henhold til fabrikantens instruksjoner.

VARNING

Explosionsfara vid felaktigt batteritype. Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparatillverkaren. Kassera använt batteri enligt fabrikantens instruktion.

VAROITUS

Paristo voi räjähtää, jos se on virheellisesti asennettu. Vaihda paristo ainoastaan valmistajan suosittelemaan tyyppiin. Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

SAFETY CHECK-OUT


After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or cold-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the inter board wiring to ensure that no wires are "pinched" or contact high-wattage resistors.
3. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
4. Look for parts which, though functioning, show obvious signs of deterioration. Point them out of the customer and recommend their replacement.
5. Check the line cord for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
6. Check the b+ voltage to see it is at the values specified.
7. Check the antenna terminals, metal trim, "metalized" knobs, screws, and all other exposed metal parts for ac leakage. Check leakage as described below.

LEAKAGE

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a Return to chassis, must not exceed 0.5 mA (500 micro-amperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the SIMPSON 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milli-ammeter. The Data Precision 245 digital multi-meter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated ac voltmeter. The "limit" indication is 0.75V, so analog meters must have an accurate low-voltage scale. The SIMPSON 250 and SANWA SH-63TRD are examples of a passive VOM that is suitable. Nearly all battery operated digital multi-meters that have a 2V AC range are suitable.

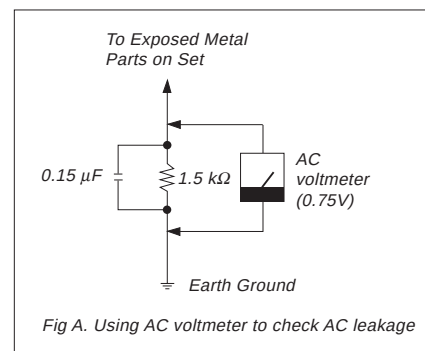

NOTIFICATION for environmental assessment

This model is CR2032 lithium battery onboard inside on the GB MOUNT or GH MOUNT as Timer backup power. CR2032 life may be about 5 to 8 years, so you have very few need for changing to new one. But if you have necessary to replaced to new one or disassemble for scrapping, you have to keep your country law, regulation, standard, etc. of environmental assessment and safety.

TABLE OF CONTENTS

SCPH-30000 R series F-type model with GH015(12/22) MOUNT

1. SPECIFICATIONS	GH015(12/22)- 4
2. SUPPLIED ACCESSORIES AND PACKING BLOCK	GH015(12/22)- 5
3. INSTRUCTION MANUAL BLOCK	GH015(12/22)- 7
4. EXPLODED VIEWS	
Overall and Main Block	GH015(12/22)- 8
MD Block	GH015(12/22)-11
GH Mount Block and Shield (A) Assy Block	GH015(12/22)-12
Switch Assy Block	GH015(12/22)-13
Power Switch, Fan and Rear Panel Assy Block	GH015(12/22)-14
5. Block Diagram	GH015(12/22)-15
6. Printed Wiring Boards and Schematic Diagrams	
Note for Printed Wiring Boards and Schematic Diagrams	GH015(12/22)-16
GH015(12/22) Mount	GH015(12/22)-17
Electrical Parts List for GH015(12/22) Mount	GH015(12/22)-28
Switch Mount	GH015(12/22)-37

1. SPECIFICATIONS

General

Power requirements

120 V AC, 60 Hz	for SCPH-30001 R
220 -240 V AC, 50/60 Hz	
	for SCPH-30002 R/-30003 R/-30004 R
220 V AC, 50/60 Hz	for SCPH-30005 R
220 -240 V AC, 50/60 Hz	for SCPH-30006 R
110 V AC, 50/60 Hz	for SCPH-30007 R

Power consumption

79 W	for SCPH-30001 R
50 W	
	for SCPH-30002 R/-30003 R/-30004 R
	SCPH-30005 R/-30006 R
47W	for SCPH-30007 R

Dimensions

301 x 78 x 182 mm (w/h/d)

Mass

2.4 kg

Inputs/Outputs on the front

- Controller ports (2)
- Memory card slots (2)
- USB ports (2)
- S400 (i-Link) port (1)

Inputs/Outputs on the rear

- HDD bay slot (1)

Outputs on the rear

- AV Multi out port (1)
- RGB, Ycbcr, Y/C, Composite-video,
- Audio-L/R, XGA
- Digital out port (1)
- Optical audio

Supplied accessories

- AC power cord (1)
- A/V connecting cable (1)
- Dualshock2 Analog controller (1)
- Euro-AV Connector (1)
- for SCPH-30003 R/-30004 R

2. SUPPLIED ACCESSORIES AND PACKING BLOCK

NOTE :

• Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.

• -XX and -X mean standardized parts, so they may have some difference from the original one.

• RESISTORS

METAL : Metal-film resistor.

F : nonflammable

Unit is Ω.

• SEMICONDUCTORS

In each case, u : μ, for example :

uA ... : μA ... uPA ... : μPA ...

uPB ... : μPB ... uPC ... : μPC ... uPD ... : μPD ...

• CAPACITORS

uF : μF

• COILS

uH : μH

The components identified by mark Δ or dotted line with mark. Δ are critical for safety.

Replace only with part number specified.

SUPPLIED ACCESSORIES and PACKING GROUP

PLACE CODE #23

SCPH-30001 R F-type model ACCESSORIES & PACKING GROUP

Ref.	Part No.	Description
Δ AC	1-790-108-21	CORD, POWER
AV	1-792-028-11	AV CABLE (Integrated audio/video)
AV	1-792-028-21	AV CABLE (Integrated audio/video)
AV	1-792-028-31	AV CABLE (Integrated audio/video)
AV	1-792-028-41	AV CABLE (Integrated audio/video)
AV	1-792-028-51	AV CABLE (Integrated audio/video)
AV	1-792-028-61	AV CABLE (Integrated audio/video)
CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)
CU	3-064-714-01	CUSHION
CU2	3-064-713-01	CUSHION 2
SH	3-065-170-01	SHEET, PROTECTION
CA	3-071-632-11	INDIVIDUAL, CARTON
MC	3-071-633-01	MASTER CARTON, 3 SETS
TA	3-987-483-11	TAPE, BERODDED PREVENTION
IMB	A-6785-354-A	MANUAL BLOCK ASSY, INSTRUCTION

SCPH-30002 R F-type model ACCESSORIES & PACKING GROUP

Ref.	Part No.	Description
Δ AC	1-555-074-51	CORD, POWER
AV	1-792-028-11	AV CABLE (Integrated audio/video)
AV	1-792-028-21	AV CABLE (Integrated audio/video)
AV	1-792-028-31	AV CABLE (Integrated audio/video)
AV	1-792-028-41	AV CABLE (Integrated audio/video)
AV	1-792-028-51	AV CABLE (Integrated audio/video)
AV	1-792-028-61	AV CABLE (Integrated audio/video)
CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)
CU	3-064-714-01	CUSHION
SH	3-060-494-01	SHEET, PROTECTION
CA	3-071-639-01	INDIVIDUAL CARTON
PAD	3-065-172-01	PAD, TOGETHER PACKING
MC	3-071-635-52	MASTER CARTON, 3 SETS
TA	3-987-483-11	TAPE, BERODDED PREVENTION
IMB	A-6785-379-A	MANUAL BLOCK ASSY, INSTRUCTION

SCPH-30003 R F-type model ACCESSORIES & PACKING GROUP

Ref.	Part No.	Description
CONV	1-785-004-12	CONNECTOR, CONVERSION
CONV	1-573-291-12	CONNECTOR, CONVERSION
Δ AC	1-751-115-21	CORD, POWER
Δ AC	1-751-115-31	CORD, POWER
Δ AC	1-790-023-21	CODE, POWER
AV	1-792-028-11	AV CABLE (Integrated audio/video)
AV	1-792-028-21	AV CABLE (Integrated audio/video)
AV	1-792-028-31	AV CABLE (Integrated audio/video)
AV	1-792-028-41	AV CABLE (Integrated audio/video)
AV	1-792-028-51	AV CABLE (Integrated audio/video)
AV	1-792-028-61	AV CABLE (Integrated audio/video)
CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)
CU	3-064-714-01	CUSHION
SH	3-060-494-01	SHEET, PROTECTION
CA	3-071-634-11	INDIVIDUAL CARTON
PAD	3-065-172-01	PAD, TOGETHER PACKING
MC	3-071-635-42	MASTER CARTON, 3 SETS
TA	3-987-483-11	TAPE, BERODDED PREVENTION
IMB	A-6785-377-A	MANUAL BLOCK ASSY, INSTRUCTION

SCPH-30004 R F-type model ACCESSORIES & PACKING GROUP

Ref.	Part No.	Description
CONV	1-785-004-12	CONNECTOR, CONVERSION
CONV	1-573-291-12	CONNECTOR, CONVERSION
Δ AC	1-575-131-82	CORD, POWER
Δ AC	1-823-152-11	CORD, POWER
AV	1-792-028-11	AV CABLE (Integrated audio/video)
AV	1-792-028-21	AV CABLE (Integrated audio/video)
AV	1-792-028-31	AV CABLE (Integrated audio/video)
AV	1-792-028-41	AV CABLE (Integrated audio/video)
AV	1-792-028-51	AV CABLE (Integrated audio/video)
AV	1-792-028-61	AV CABLE (Integrated audio/video)
CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)
CU	3-064-714-01	CUSHION
SH	3-060-494-01	SHEET, PROTECTION
CA	3-071-634-02	INDIVIDUAL CARTON
PAD	3-065-172-01	PAD, TOGETHER PACKING
MC	3-071-635-32	MASTER CARTON, 3 SETS
TA	3-987-483-11	TAPE, BERODDED PREVENTION
IMB	A-6785-382-A	MANUAL BLOCK ASSY, INSTRUCTION

NOTE :

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
 - -XX and -X mean standardized parts, so they may have some difference from the original one.
 - RESISTORS
 - METAL : Metal-film resistor.
 - F : nonflammable
 - Unit is Ω.
- SEMICONDUCTORS
 - In each case, u : μ, for example :
uA ... : μA ... uPA ... : μPA ...
uPB ... : μPB ... uPC ... : μPC ... uPD ... : μPD ...
 - CAPACITORS
 - uF : μF
 - COILS
 - uH : μH

The components identified by mark Δ or dotted line with mark. Δ are critical for safety. Replace only with part number specified.

SUPPLIED ACCESSORIES and PACKING GROUP

PLACE CODE #23

SCPH-30005 R F ACCESSORIES & PACKING GROUP *****			SCPH-30006 R F ACCESSORIES & PACKING GROUP *****			SCPH-30007 R F ACCESSORIES & PACKING GROUP *****		
Ref.	Part No.	Description	Ref.	Part No.	Description	Ref.	Part No.	Description
Δ AC	1-823-638-11	CORD, POWER	Δ AC	1-823-738-11	CORD, POWER	Δ AC	1-757-562-61	CORD, POWER
AV	1-792-028-11	AV CABLE (Integrated audio/video)	AV	1-792-028-11	AV CABLE (Integrated audio/video)	AV	1-792-028-11	AV CABLE (Integrated audio/video)
AV	1-792-028-21	AV CABLE (Integrated audio/video)	AV	1-792-028-21	AV CABLE (Integrated audio/video)	AV	1-792-028-21	AV CABLE (Integrated audio/video)
AV	1-792-028-31	AV CABLE (Integrated audio/video)	AV	1-792-028-31	AV CABLE (Integrated audio/video)	AV	1-792-028-31	AV CABLE (Integrated audio/video)
AV	1-792-028-41	AV CABLE (Integrated audio/video)	AV	1-792-028-41	AV CABLE (Integrated audio/video)	AV	1-792-028-41	AV CABLE (Integrated audio/video)
AV	1-792-028-51	AV CABLE (Integrated audio/video)	AV	1-792-028-51	AV CABLE (Integrated audio/video)	AV	1-792-028-51	AV CABLE (Integrated audio/video)
AV	1-792-028-61	AV CABLE (Integrated audio/video)	AV	1-792-028-61	AV CABLE (Integrated audio/video)	AV	1-792-028-61	AV CABLE (Integrated audio/video)
CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-792-238-72	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-823-069-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-823-091-11	ANALOG CONTROLLER (DUALSHOCK 2)
CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)	CONT	1-823-552-11	ANALOG CONTROLLER (DUALSHOCK 2)
CU	3-064-714-01	CUSHION	CU	3-064-714-01	CUSHION	CU	3-064-714-01	CUSHION
SH	3-060-494-01	SHEET, PROTECTION	SH	3-060-494-01	SHEET, PROTECTION	SH	3-060-494-01	SHEET, PROTECTION
CA	3-072-722-01	INDIVIDUAL CARTON	CA	3-072-727-01	INDIVIDUAL CARTON	CA	3-074-221-01	INDIVIDUAL CARTON
MC	3-072-723-01	MASTER CARTON, 3 SETS	MC	3-072-728-01	MASTER CARTON, 3 SETS	MC	3-074-220-01	MASTER CARTON, 3 SETS
IMB	A-6705-464-A	MANUAL BLOCK ASSY, INSTRUCTION	IMB	A-6705-462-A	MANUAL BLOCK ASSY, INSTRUCTION	IMB	A-6705-476-A	MANUAL BLOCK ASSY, INSTRUCTION
*****			*****			*****		

NOTE :

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
METAL : Metal-film resistor.
F : nonflammable
Unit is Ω .
- SEMICONDUCTORS
In each case, $u : \mu$, for example :
 $uA \dots \mu A \dots uPA \dots \mu PA \dots$
 $uPB \dots \mu PB \dots uPC \dots \mu PC \dots uPD \dots \mu PD \dots$
- CAPACITORS
 $uF : \mu F$
- COILS
 $uH : \mu H$

The components identified by mark  or dotted line with mark.  are critical for safety. Replace only with part number specified.

PLACE CODE #23

A-6785-354-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30001 R (F-type)

<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
CI	3-072-824-01	CARD, CUSTOMER INQUIRY
CS	3-066-966-01	CARD, SERVICE NUMBER
ES	3-060-161-02	SHEET, ESRB
IM	3-071-581-13	MANUAL, INSTRUCTION

A-6785-379-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30002 R (F-type)

<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
AOR	3-066-158-02	CARD (A), OWNER REGISTRATION
DISK	3-073-543-01	DISK, DEMONSTRATION
IM	3-071-581-22	MANUAL, INSTRUCTION
SE	3-987-375-02	SEAL, SEAL

A-6785-377-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30003 R (F-type)

<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
BOR	3-066-159-02	CARD (B), OWNER REGISTRATION
DISK	3-073-543-01	DISK, DEMONSTRATION
IM	3-071-581-33	MANUAL, INSTRUCTION
SE	3-987-375-02	SEAL, SEAL

A-6785-382-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30004 R (F-type)

<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
COR	3-066-160-03	CARD (C), OWNER REGISTRATION
DISK	3-073-543-01	DISK, DEMONSTRATION
IM	3-071-581-43	MANUAL, INSTRUCTION
IM	3-071-581-53	MANUAL, INSTRUCTION
SE	3-987-375-02	SEAL, SEAL

A-6705-464-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30005 R (F type)

<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
IM	3-071-581-61	MANUAL, INSTRUCTION

A-6705-462-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30006 R (F-type)


<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
IM	3-071-581-71	MANUAL, INSTRUCTION

A-6705-476-A INSTRUCTION MANUAL BLOCK ASSY
for SCPH-30007 R (F-type)

<u>Ref.</u>	<u>Part No.</u>	<u>Description</u>
IM	3-071-581-__	MANUAL, INSTRUCTION

4. EXPLODED VIEWS

Overall and Main Block for SCPH-30001 R(UC2)

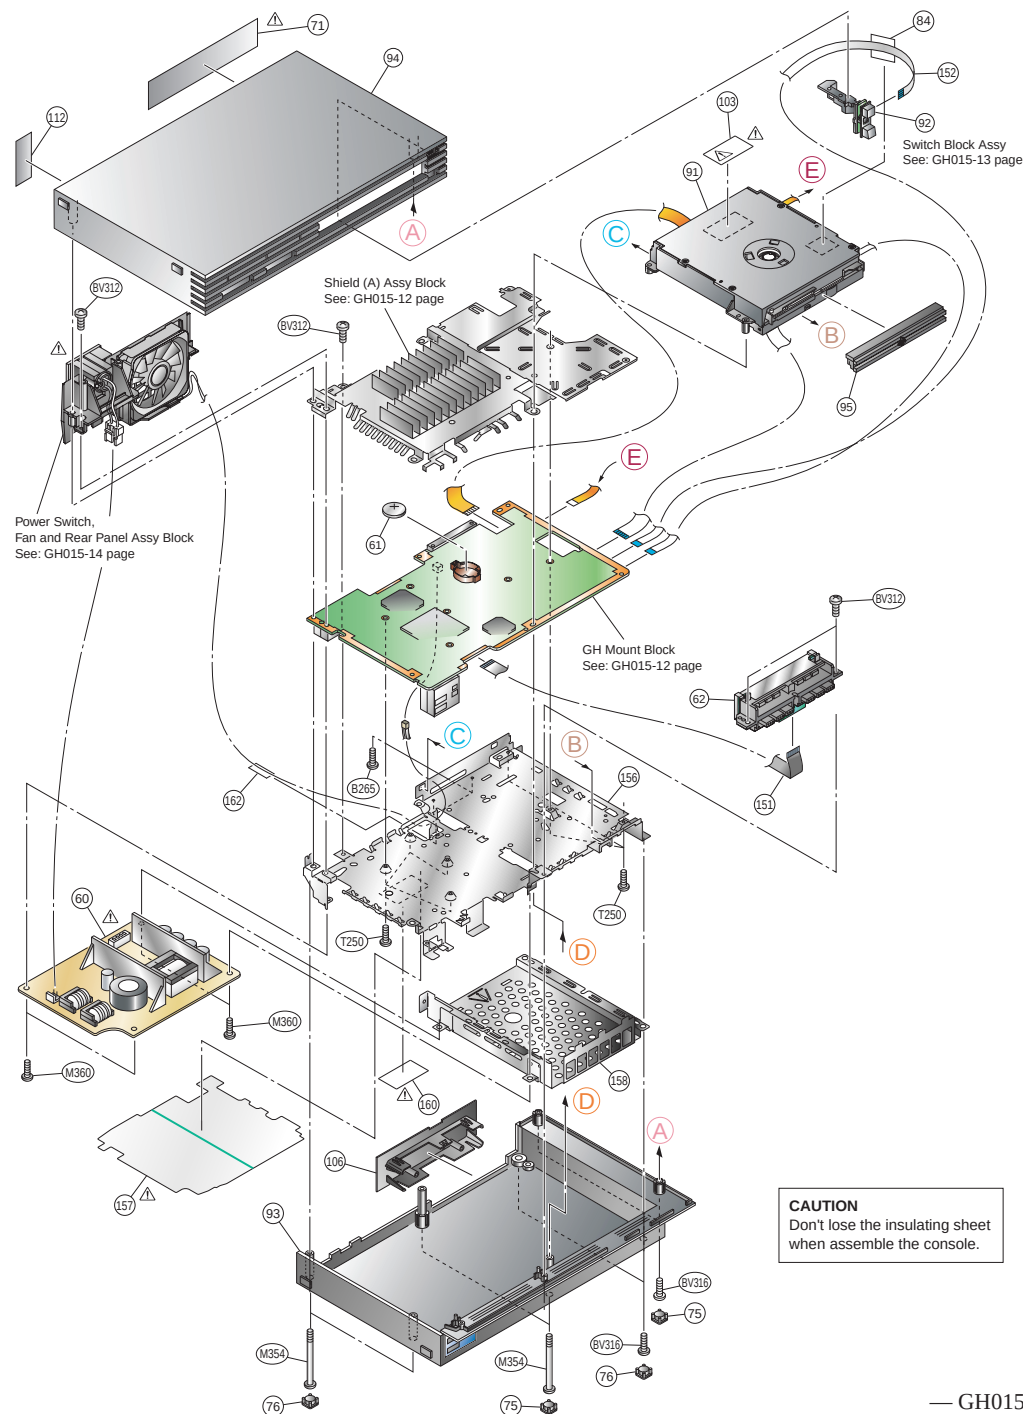

CAUTION

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.


CAUTION :
Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

OVERALL AND MAIN BLOCK

Ref.No.	Part No.	Description	Remark	Place code
Δ 60	1-468-604-11	POWER BLOCK	for 120V AC	#00
Δ 60	1-468-623-11	POWER BLOCK	for 120V AC	#00
61	1-528-174-41	BATTERY, LITHIUM (CR2032 TYPE)		#25GH
62	1-694-873-11	TERMINAL BOARD (FRONT)		#17
62	1-694-874-11	TERMINAL BOARD (FRONT)		#17
62	1-694-875-11	TERMINAL BOARD (FRONT)		#17
Δ 71	3-071-967-01	LABEL, MODEL NUMBER (UC2)		#87
75	3-059-626-03	COVER, SCREW		#22
76	3-059-627-01	CAP		#22
84	3-067-170-01	TAPE (20X20), HARNESS STOPPER		#87
91	A-6705-440-A	MD BLOCK ASSY		#10
92	A-6705-439-A	SWITCH BLOCK ASSY		#87
93	X-3951-706-2	COVER ASSY, LOWER		#87
94	X-3951-705-2	COVER ASSY, UPPER		#87
95	X-3951-099-1	PLATE ASSY, ORNAMENTAL		#87
Δ 103	3-976-231-11	LABEL, CAUTION		#87
106	3-070-847-01	LID		#87
112	3-066-253-01	TAPE, VOID		#87
151	1-757-934-11	CABLE, FLEXIBLE FLAT (FFC-011)		#12
151	1-757-934-21	CABLE, FLEXIBLE FLAT (FFC-011)		#12
151	1-757-934-31	CABLE, FLEXIBLE FLAT (FFC-011)		#12
152	1-823-341-11	CABLE, FLEXIBLE FLAT (FFC-015)		#12
152	1-823-341-21	CABLE, FLEXIBLE FLAT (FFC-015)		#12
156	3-071-970-02	SHIELD B (F)		#16
Δ 157	3-071-971-01	SHEET, INSULATING		#16
158	3-071-973-01	SHIELD HDD (F)		#87
Δ 160	3-703-692-01	LABEL, CAUTION, BARRIER		#16
162	3-069-212-01	TAPE, HARNESS STOPPER		#87
B265	3-069-170-01	TAPPING (B2X6.5)		#87
BV312	3-325-679-21	SCREW, TAPPING +BV 3X12		#87
BV316	3-070-296-01	TAPPING +BV 3X16		#87
BV316	3-325-679-91	SCREW (2 LOCK), +BV TAPPING		#87
M354	3-059-622-02	SCREW (M3X54), HEAD TAPPING		#87
M360	3-069-168-01	TITE (CZN), M3X6 +BV S		#87
T250	3-071-976-01	TAPPING (2X5)		#87

CAUTION
Don't lose the insulating sheet when assemble the console.

Overall and Main Block for SCPH-30002 R(AU3) /-30003 R(CEK) /-30004 R(CEL)

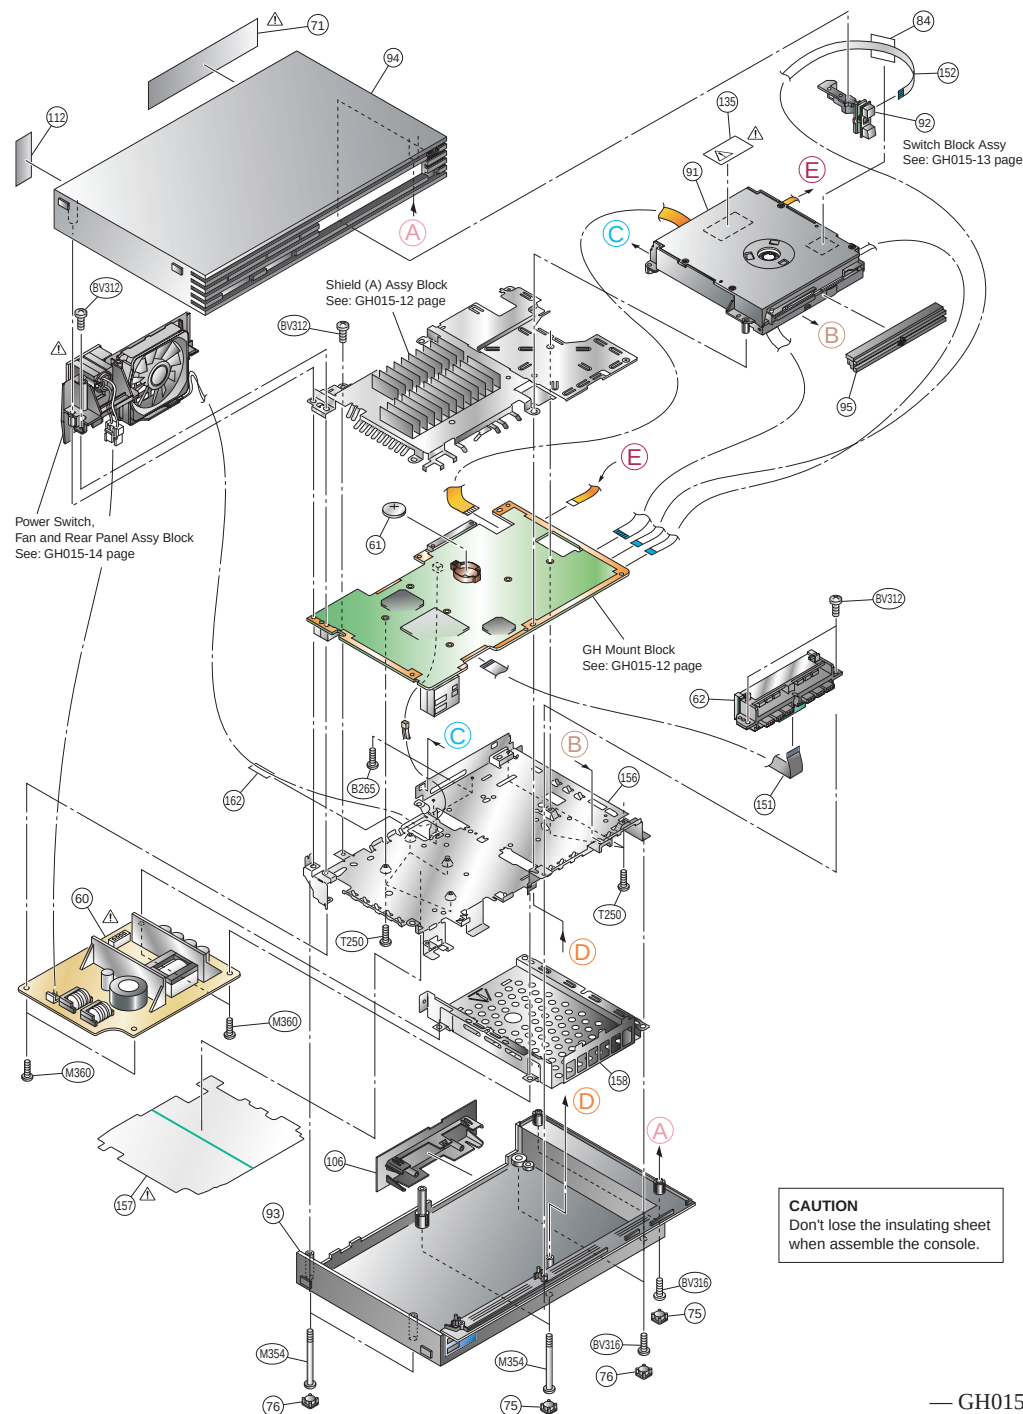**CAUTION**

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

CAUTION :

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

OVERALL AND MAIN BLOCK

Ref-No.	Part No.	Description	Remark	Place code
Δ 60	1-468-605-11	POWER BLOCK	for 220-240V AC	#00
Δ 60	1-468-605-21	POWER BLOCK	for 220-240V AC	#00
Δ 61	1-528-174-41	BATTERY, LITHIUM (CR2032 TYPE)		#256H
62	1-694-873-11	TERMINAL BOARD (FRONT)		#17
62	1-694-874-11	TERMINAL BOARD (FRONT)		#17
62	1-694-875-11	TERMINAL BOARD (FRONT)		#17
Δ 71	3-072-419-01	LABEL, MODEL NUMBER (AU3)	for SCPH-30002 R F	#87
Δ 71	3-072-418-01	LABEL, MODEL NUMBER (CEK)	for SCPH-30003 R F	#87
Δ 71	3-072-417-01	LABEL, MODEL NUMBER (CEL)	for SCPH-30004 R F	#87
75	3-059-626-03	COVER, SCREW		#22
76	3-059-627-01	CAP		#22
84	3-067-170-01	TAPE (20X20), HARNESS STOPPER		#87
91	A-6705-440-A	MD BLOCK ASSY		#10
92	A-6705-439-A	SWITCH BLOCK ASSY		#87
93	X-3951-722-2	COVER ASSY, LOWER		#87
94	X-3951-721-2	COVER ASSY, UPPER		#87
95	X-3951-099-1	PLATE ASSY, ORNAMENTAL		#87
106	3-070-847-11	LID		#87
112	3-066-498-01	TAPE, VOID		#87
Δ 135	3-988-711-02	LABEL, LASER CAUTION		#87
151	1-757-934-11	CABLE, FLEXIBLE FLAT (FFC-011)		#12
151	1-757-934-21	CABLE, FLEXIBLE FLAT (FFC-011)		#12
151	1-757-934-31	CABLE, FLEXIBLE FLAT (FFC-011)		#12
152	1-823-341-11	CABLE, FLEXIBLE FLAT (FFC-015)		#12
152	1-823-341-21	CABLE, FLEXIBLE FLAT (FFC-015)		#12
156	3-071-970-02	SHIELD B (F)		#16
Δ 157	3-071-971-01	SHEET, INSULATING		#16
158	3-071-973-01	SHIELD HDD (F)		#87
162	3-069-212-01	TAPE, HARNESS STOPPER		#87
B265	3-069-170-01	TAPPING (B2X6.5)		#87
BV312	3-325-679-21	SCREW, TAPPING +BV 3X12		#87
BV316	3-070-296-01	TAPPING +BV 3X16		#87
BV316	3-325-679-91	SCREW (2 LOCK), +BV TAPPING		#87
M354	3-059-622-02	SCREW (M3X54), HEAD TAPPING		#87
M360	3-069-168-01	TITE (CZN), M3X6 +BV S		#87
T250	3-071-976-01	TAPPING (2X5)		#87

CAUTION
Don't lose the insulating sheet when assemble the console.


[illegible]

The components identified by mark or dotted line with mark. are critical for safety. Replace only with part number specified.

OVERALL AND MAIN BLOCK

CAUTION
Don't lose the insulating sheet
when assemble the console.

MD Block

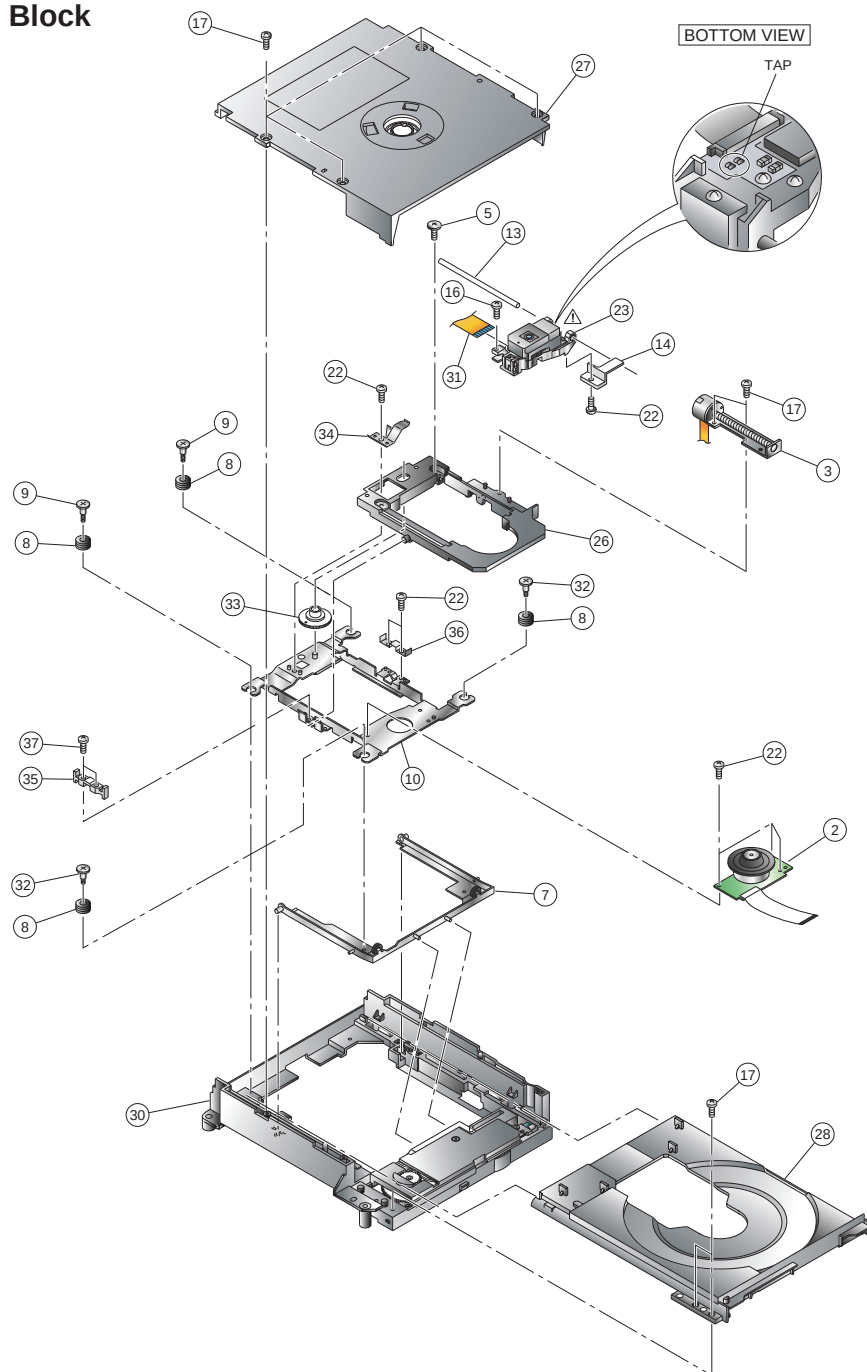

CAUTION

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

CAUTION :

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.


MD BLOCK

Ref-No.	Part No.	Description	Remark	Place code
2	1-763-700-21	MOTOR, DC (SPINDLE)		#10SP
2	8-835-733-03	MOTOR, DC SSC28C/C-NP		#10SP
3	1-763-639-21	MOTOR, DC (SLED)		#10
5	3-059-845-01	SCREW (B2X6.5), SHAFT RETAINER		#10
7	X-3951-637-1	FRAME ASSY, SUB		#10
8	3-065-277-01	INSULATOR		#10
9	3-065-276-01	SCREW, STEP		#10
10	3-071-957-01	CHASSIS, MAIN		#10
13	3-059-854-02	SHAFT, MAIN		#10
14	3-059-855-02	RACK		#10
16	3-060-399-01	SCREW, SKEW		#10
17	3-060-400-01	TAPPING (B2X6.5)		#10
22	3-062-728-01	Ø PLATE 3 MAIN M2X3.2		#10
Δ 23	1-758-717-11	DEVICE, OPTICAL SF-HD7	Made by Sanyo(Not supply)	#100P
Δ 23	8-820-151-01	DEVICE, OPTICAL KHS-400C	Made by Sony	#100P
26	X-3952-057-1	CHASSIS ASSY, SUB		#10
27	X-3952-059-1	BRACKET ASSY, PULLEY		#10
28	X-3952-060-1	TRAY ASSY		#10TR
30	X-3952-058-1	FRAME ASSY, MAIN		#10
31	1-680-370-21	PWB, FLEXIBLE		#10
32	3-068-075-02	SCREW (SUB), STEP		#10
33	3-071-965-01	CAM, TILT		#10
34	3-071-966-01	SPRING (TILT), LEAF		#10
35	3-065-282-01	GUIDE (L)		#10
36	3-065-283-01	GUIDE (R)		#10
37	3-065-557-01	SCREW (M2X6.0)		#10

CAUTION : EEPROM DATA is different between optical device made by Sony and made by Sanyo.

EEPROM DATA have to rewrite BASED ON replacing OPTICAL DEVICE.


GH Mount Block

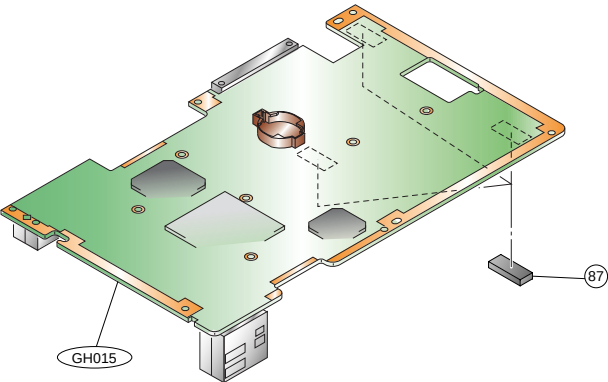

GH MOUNT BLOCK

Ref-No.	Part No.	Description	Remark	Place code
87	3-068-806-02	SHEET (DRIVER), ELECTRIC HEAT		#87
GH015	A-6714-501-A	GH-015 MOUNT	for SCPH-30001 R	#25GH
GH015	A-6714-504-A	GH-015 MOUNT	for SCPH-30002 R	#25GH
GH015	A-6714-505-A	GH-015 MOUNT	for SCPH-30003 R /-30004 R	#25GH
GH015	A-6714-514-A	GH-015 MOUNT	for SCPH-30005 R	#25GH
GH015	A-6714-513-A	GH-015 MOUNT	for SCPH-30006 R	#25GH
GH015	A-6714-520-A	GH-015 MOUNT	for SCPH-30007 R	#25GH


Shield (A) Assy Block

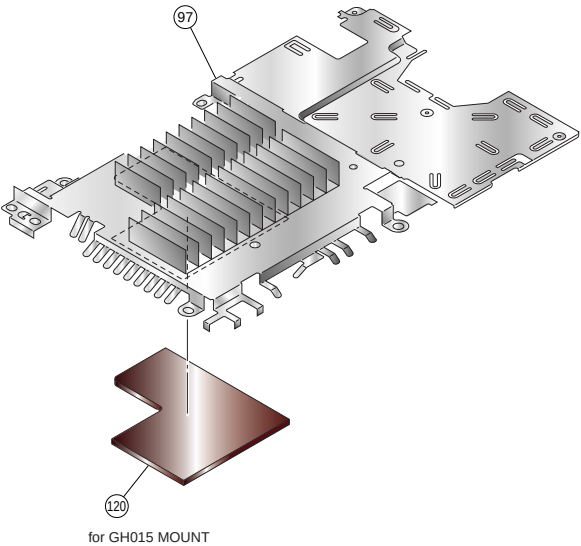

SHIELD (A) ASSY BLOCK

Ref-No.	Part No.	Description	Remark	Place code
97	X-3952-061-1	SHIELD A (F) ASSY		#87
120	3-059-652-01	SHEET (A), ELECTRIC HEAT		#87

Switch Assy Block

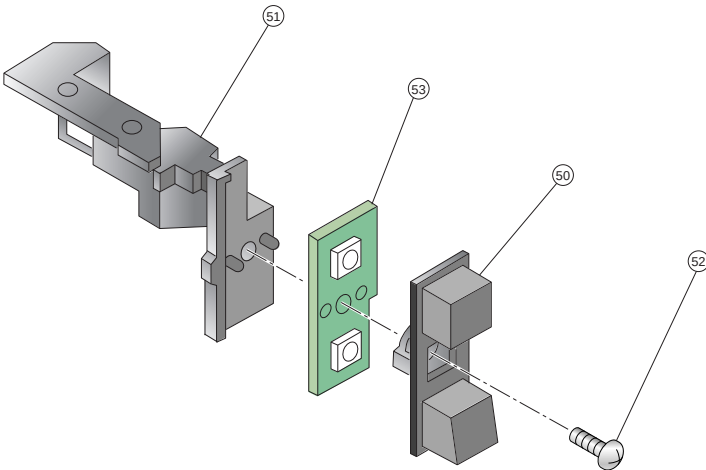

SWITCH ASSY BLOCK

A-6705-439-A SW-367 SWITCH ASSY BLOCK for GH015 MOUNT


Ref-No.	Part No.	Description	Remark	Place code
50	3-059-665-03	BUTTON, SWITCH		#25SW
51	3-059-666-05	BRACKET, SWITCH		#25SW
51	3-066-494-01	BRACKET, SWITCH		#25SW
52	7-685-105-11	TPG +P 2X8, TYPE 2, NON-SLIT		#25SW
53	A-6714-500-A	SW-367 MOUNT		#25SW

Power Switch, Fan and Rear Panel Assy Block

CAUTION


The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

CAUTION :
Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

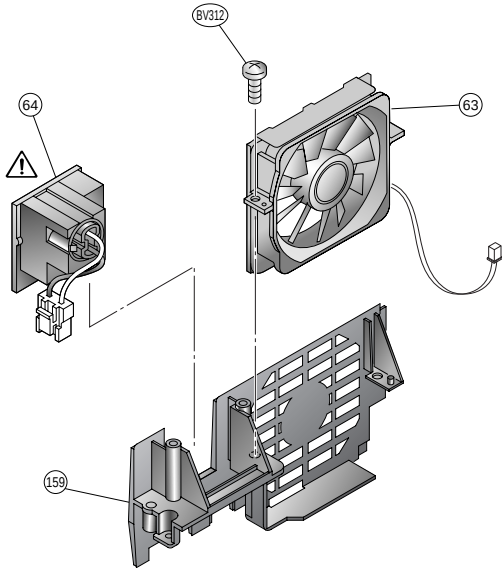

Ref-No.	Part No.	Description	Remark	Place code
63	1-763-480-31	DC. FAN		#74
63	1-763-554-31	FAN, DC		#74
63	1-763-756-21	FAN, D.C.		#74
 64	1-771-994-31	SWITCH, POWER (WITH AC INLET)	for SCPH-30001 R / -30005 R	#00
 64	1-786-209-21	SWITCH, POWER (WITH AC INLET)	for SCPH-30002 R / -30003 R / -30004 R	#00
			SCPH-30006 R / -30007 R	
159	3-071-901-01	PANEL, REAR	for SCPH-30001 R / -30005 R	#87
159	3-071-901-11	PANEL, REAR	for SCPH-30002 R / -30003 R / -30004 R	#87
			SCPH-30006 R / -30007 R	
BV312	3-325-679-21	SCREW, TAPPING +BV 3X12		#87

5. BLOCK DIAGRAM

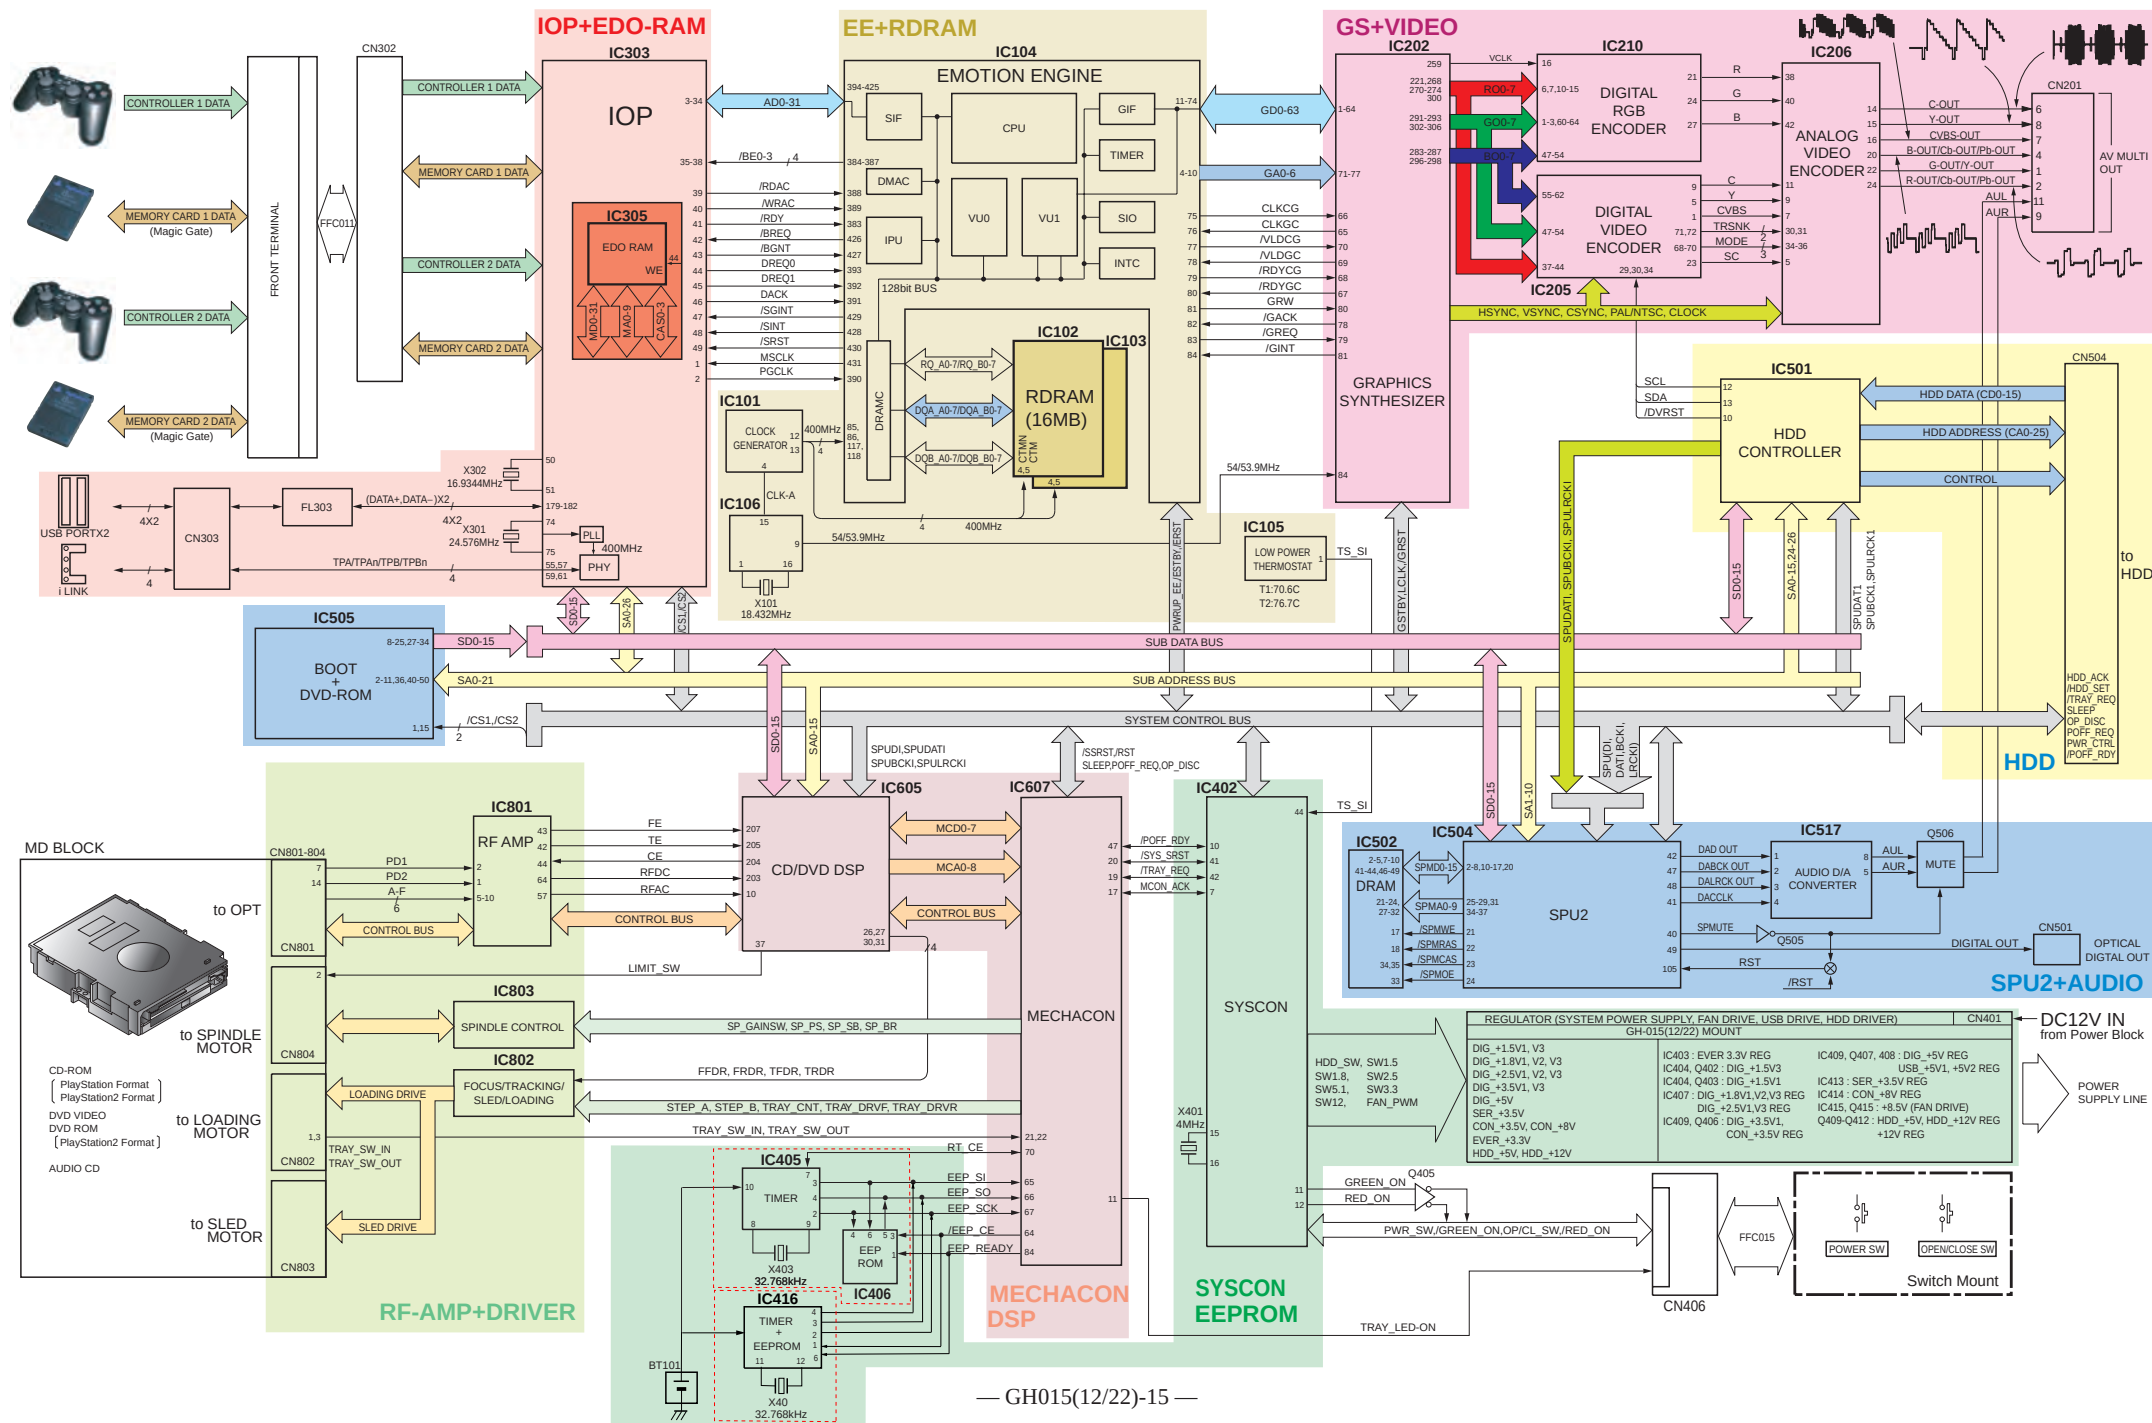

6. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS for GH015(12/22) MOUNT

THIS NOTE IS COMMON FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS.**Note on Printed Wiring Boards :**

- Through hole is omitted.
-  : Pattern on the side which is seen.

Note on Schematic Diagram :

- Use caution when replacing chip parts.
New parts must be attached after removal of chip.
Be careful not to heat the minus side of tantalum capacitor, because it is damaged by the heat.
- All capacitors are in F unless otherwise noted. pF : F 50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and 1/4 W (Chip resistors : 1/10W) unless otherwise specified.
- Chip resistors are 1/8 W or 1/10 W unless otherwise noted.
k Ω : 1000 Ω , M Ω : 1000 k Ω .

Note :

The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.


Note :


Les composants identifies par une marque  sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

Note on DC Power line :


Unit of voltage is V (volt)

- | | |
|---|--|
| • +12V :  | • +3.3V :  |
| • +8.0V :  | • +2.5V :  |
| • +5.0V :  | • +1.8V :  |
| • +3.5V :  | • VC :  |
| • +1.7V :  | • +1.5V :  |
| • IN :  | • Main Signal Line :  |
| • OUT :  | |

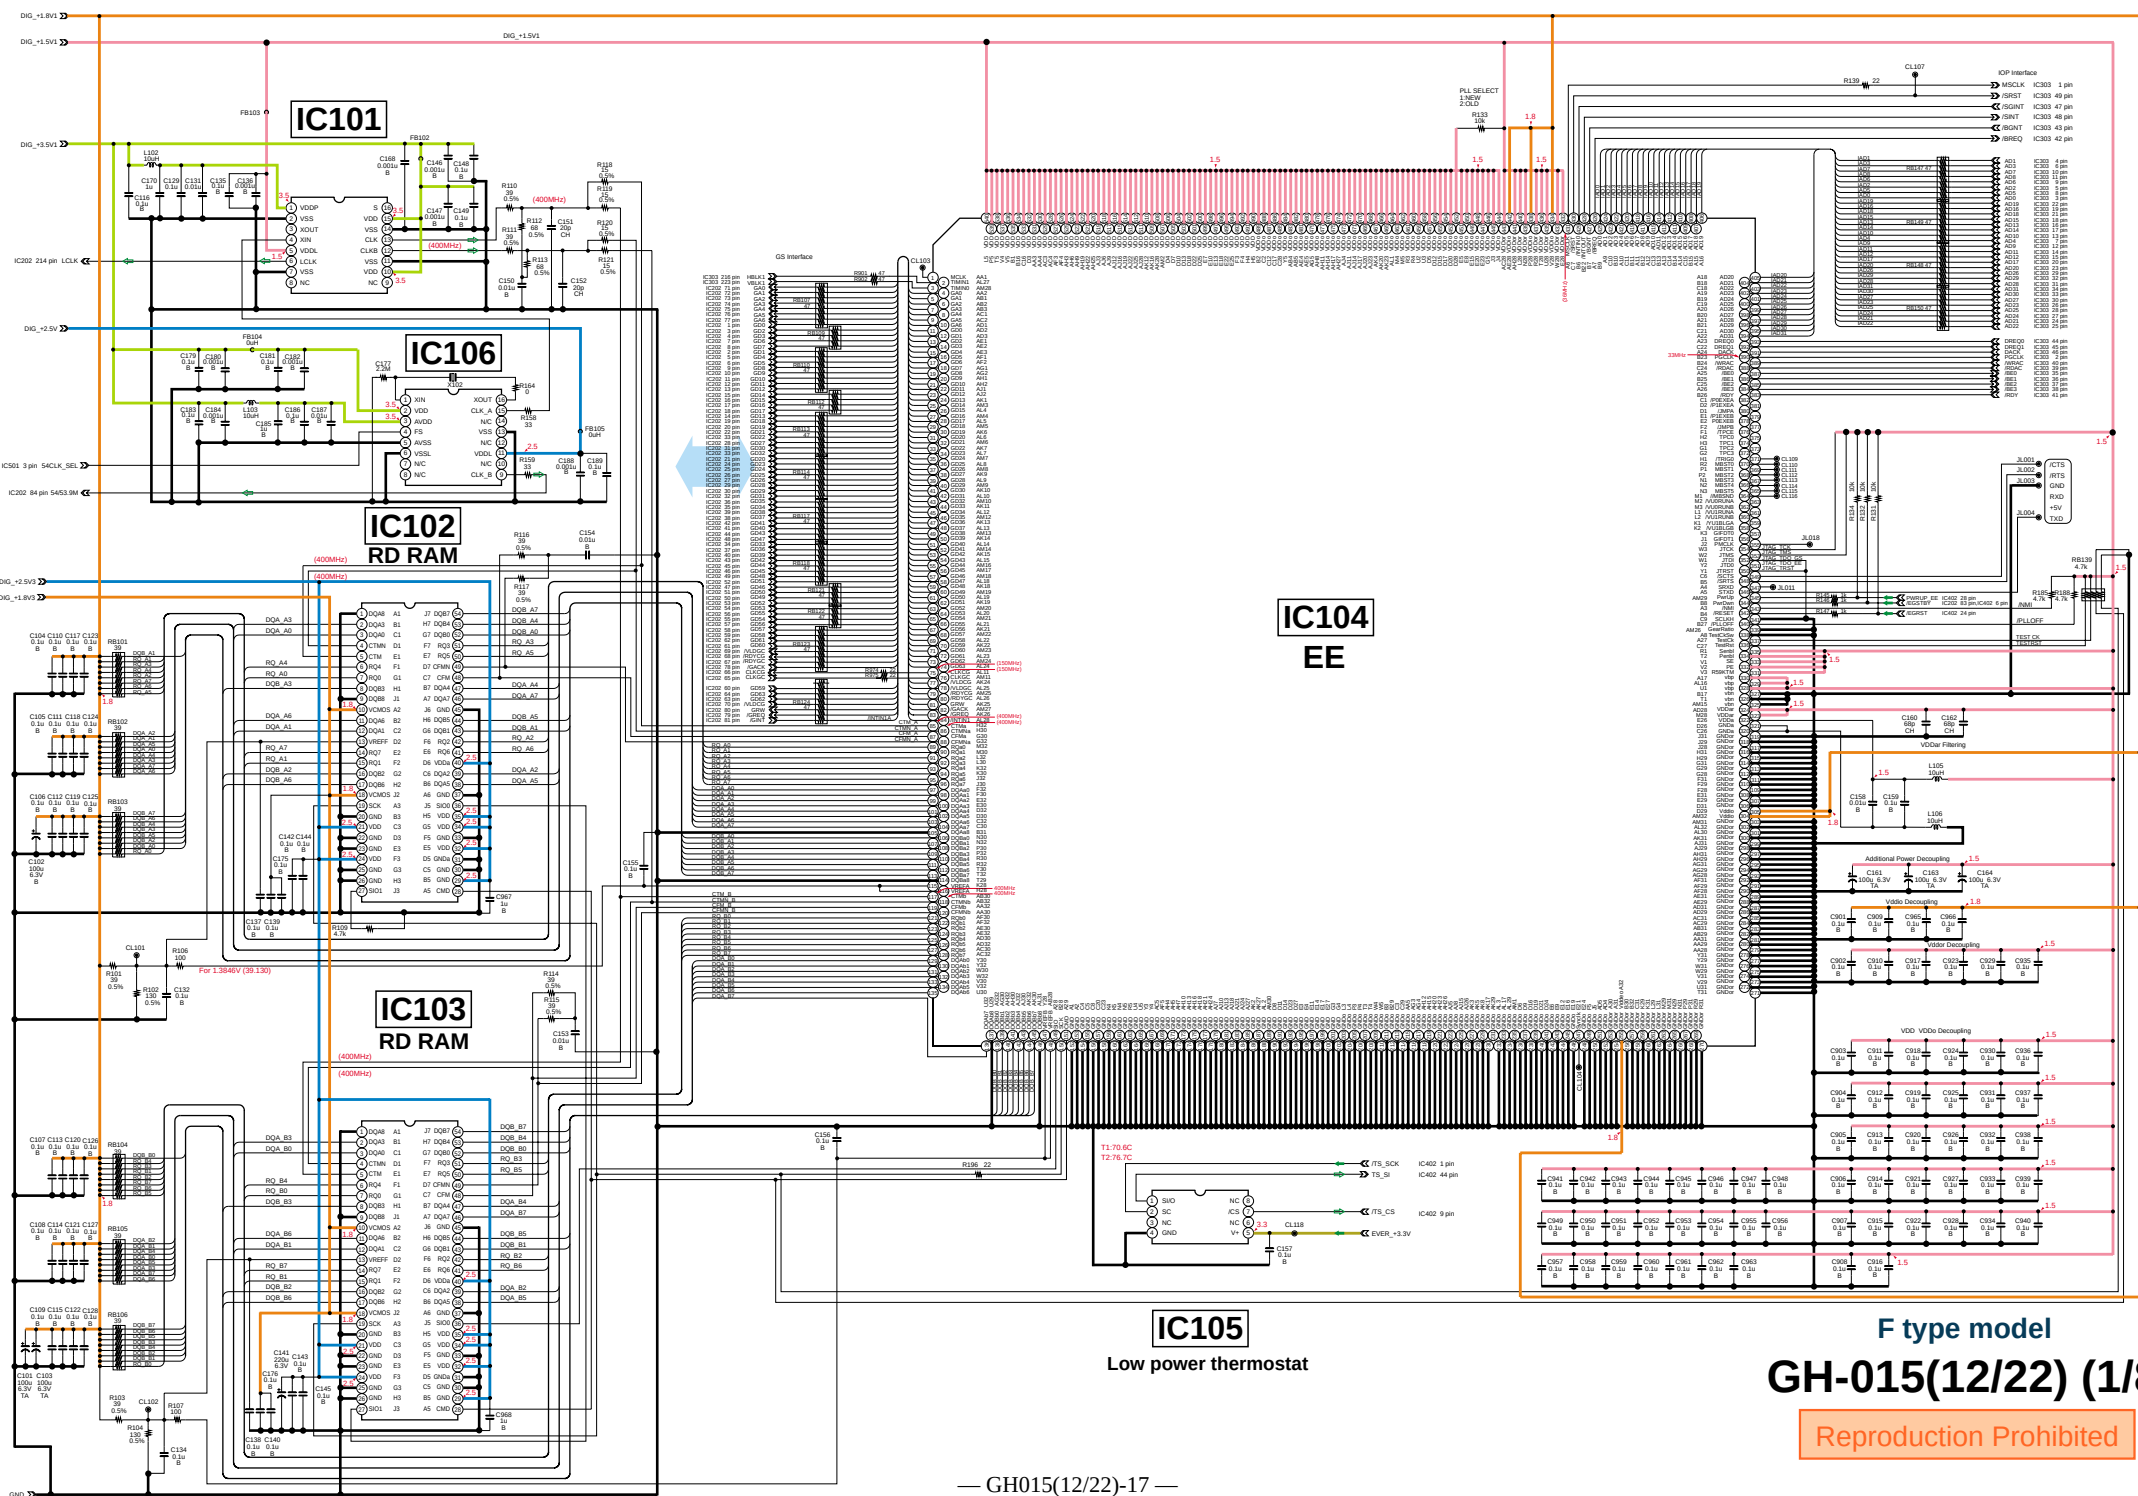

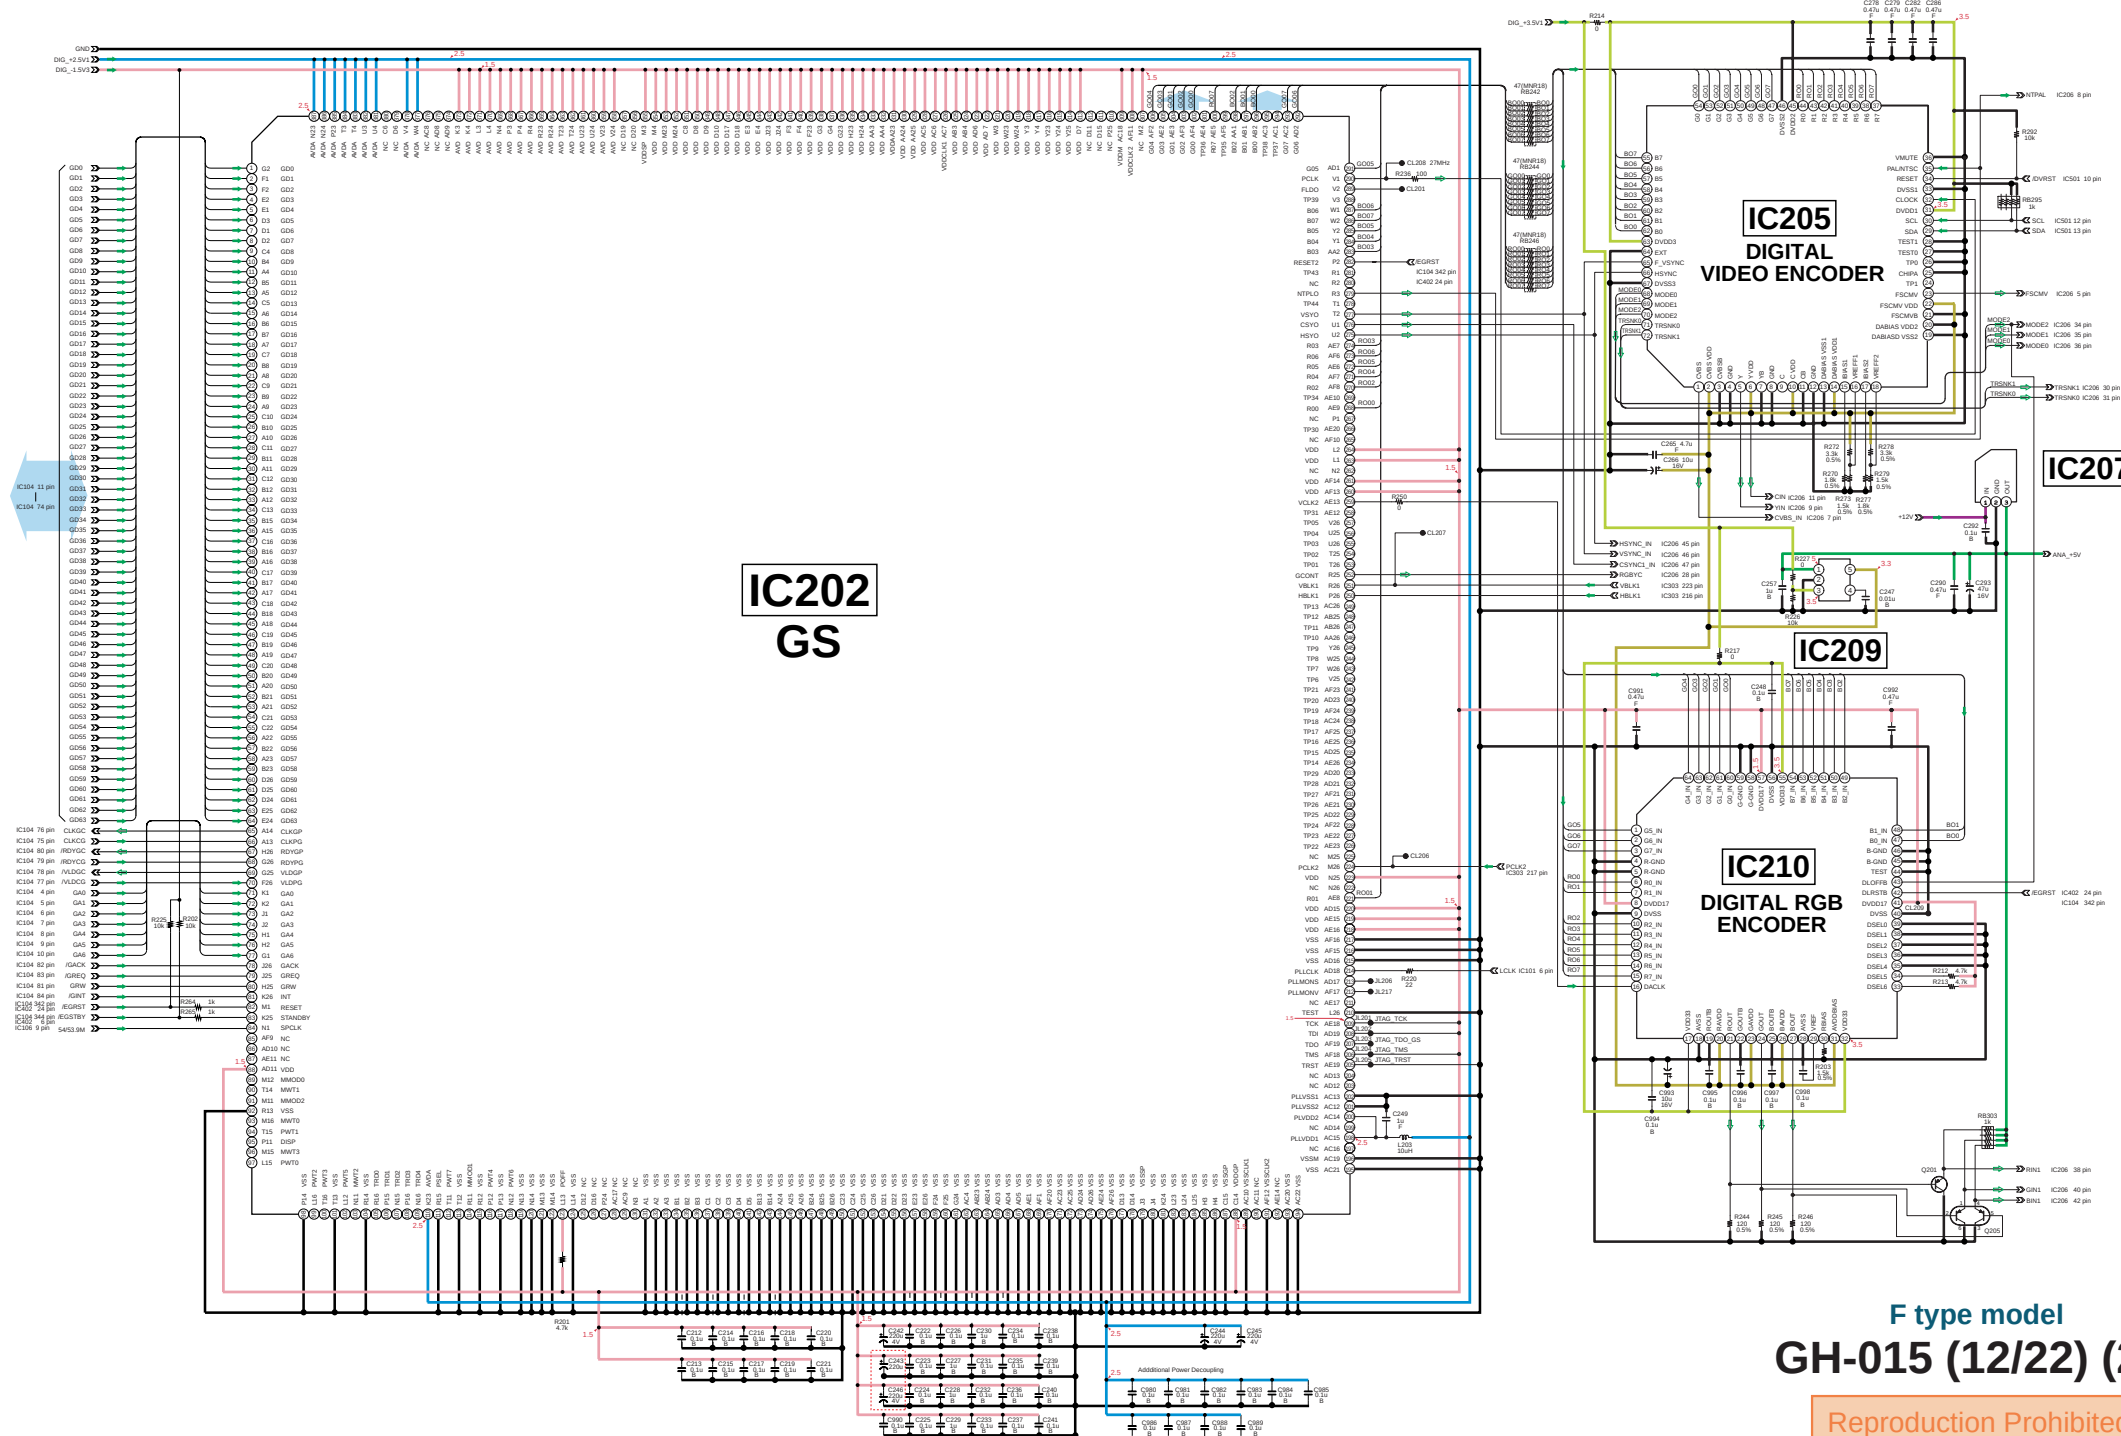

Reproduction Prohibited







note1


— GH015(12/22)-20 —

— GH015(12/22)-21 —



— GH015(12/22)-22 —

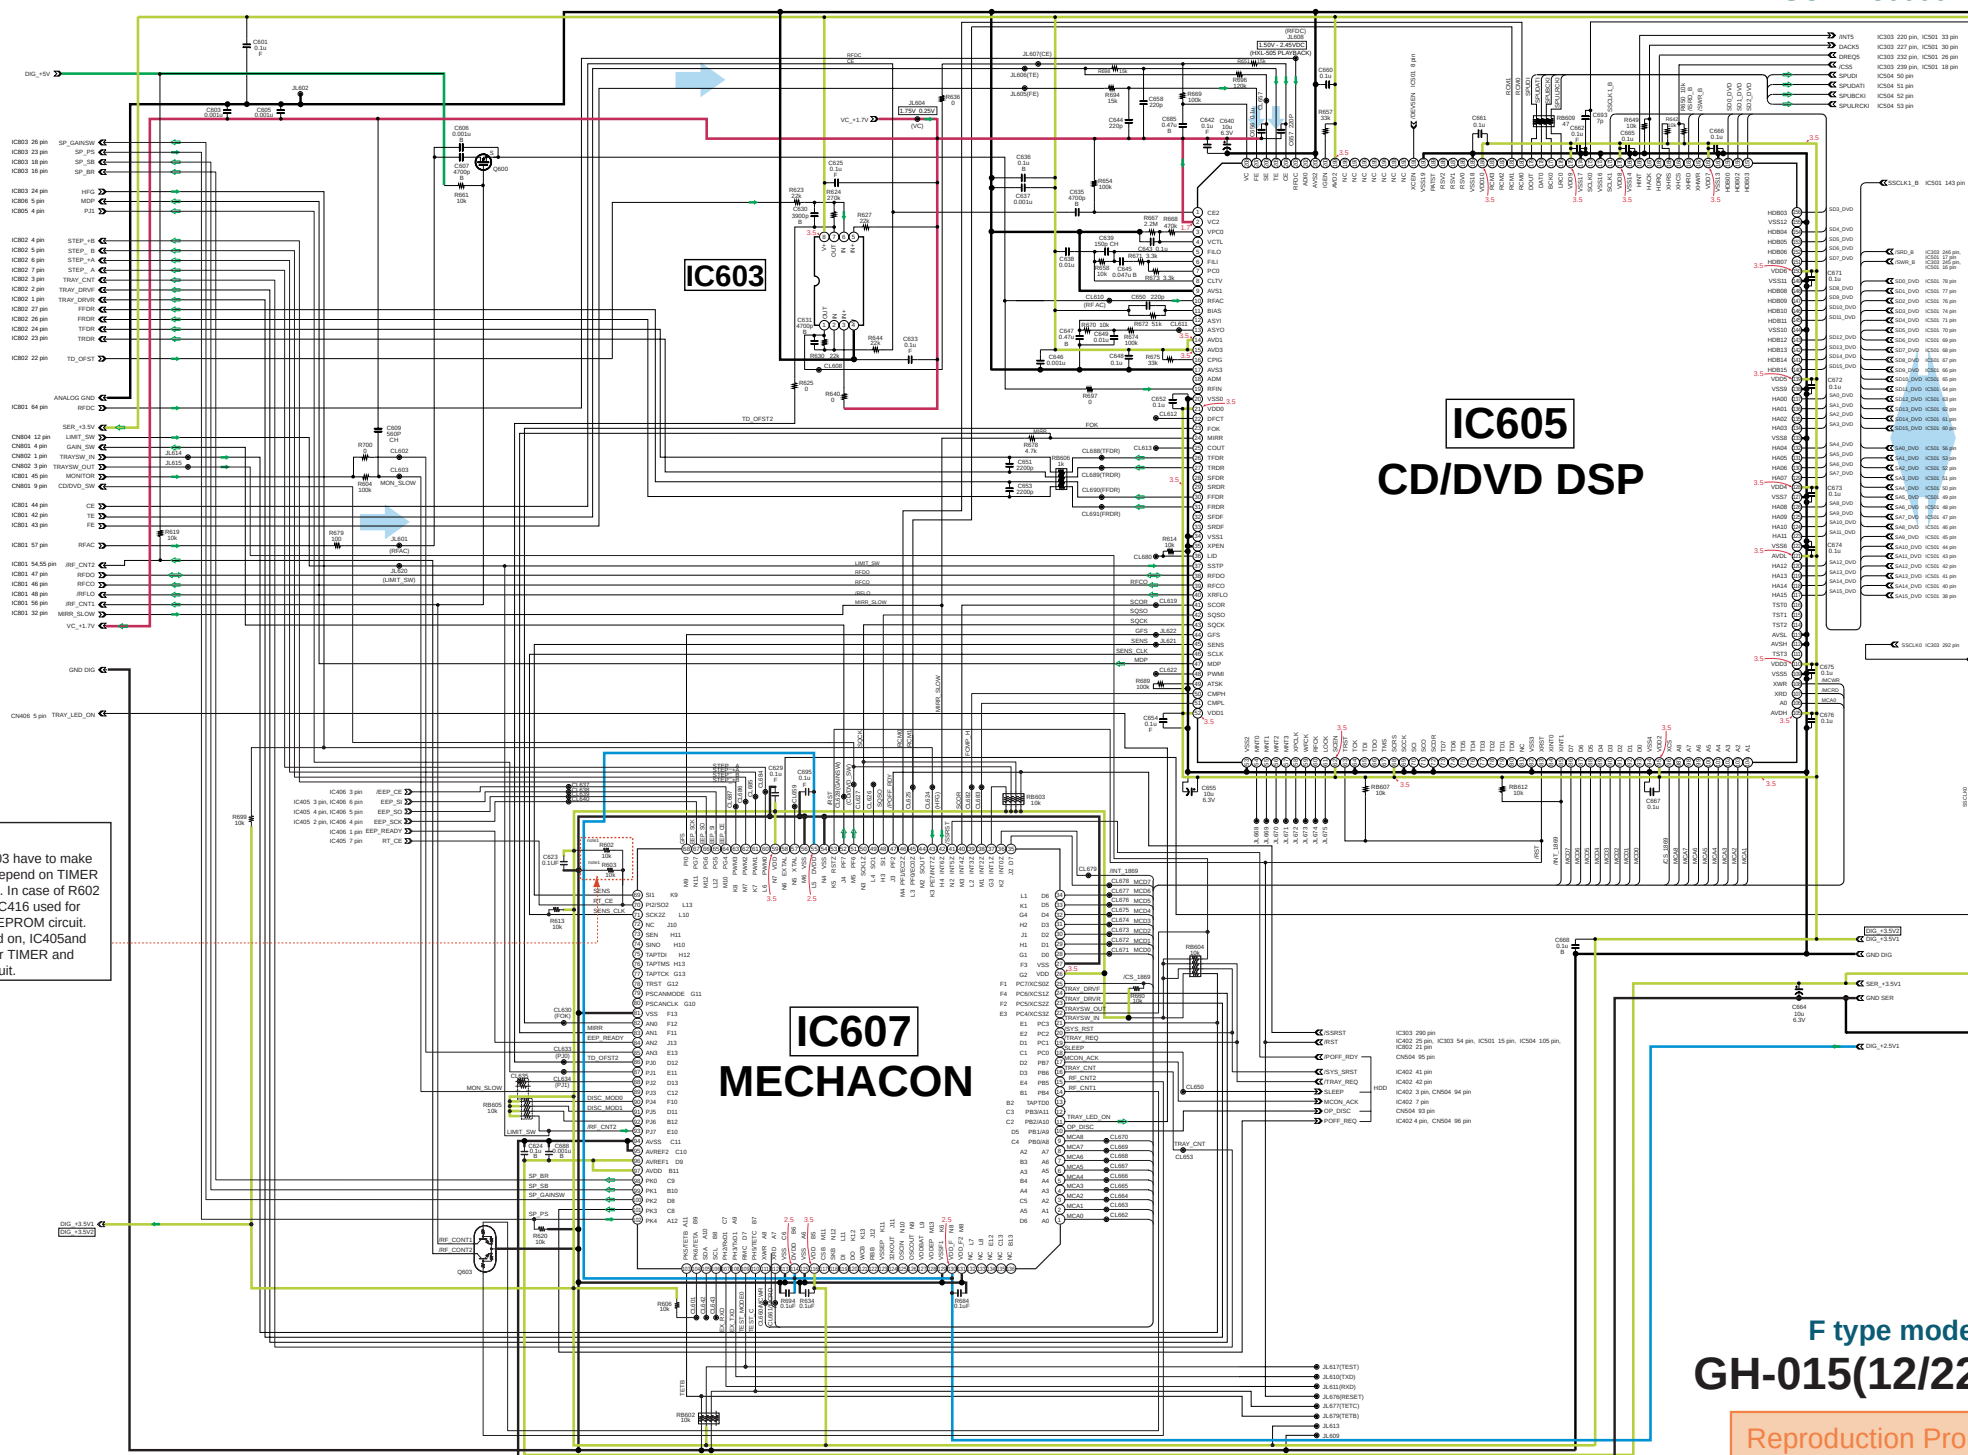



— GH015(12/22)-24 —



A side

ELECTRICAL PARTS LIST for GH015(12/22) MOUNT

NOTE :

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
METAL : Metal-film resistor
F : nonflammable
Unit is Ω.
- SEMICONDUCTORS
In each case, u : μ, for example :
uA ... : μA ... uPA ... : μPA ...
uPB ... : μPB ... uPC ... : μPC ... uPD ... : μPD ...
- CAPACITORS
uF : μF
• COILS
uH : μH

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

CAUTION.

TIMER and EEPROM circuit are difference among the MECACON(IC607) VERSION.

Dissimilarity Parts List for GH015(12/22) MOUNT on SCPH-30000 R series F-type model

A-6714-501-A GH015(12/22) MOUNT on SCPH-30001 R(UC2) F-type model

Ref.	Part No.	Description	Remarks	Ref.	Part No.	Description	Remarks	Ref.	Part No.	Description	Remarks
IC607	8-752-928-26	IC CXP103049-102GG-TL	MECHACON	C231	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		R413	1-218-883-91	RES, CHIP 33K (1608)	
IC505	6-801-172-01	IC MR27V4812F-012TMZ	BOOT+DVD-ROM	C232	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		R414	1-216-864-91	CONDUCTOR, CHIP (1608)	
IC505	6-801-195-01	IC K3NSV104SB-TC1AT00	BOOT+DVD-ROM	C233	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C212	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
IC416	6-701-551-01	IC BU9861FV-WE2	TIMER+EEPROM	C234	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C213	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C445	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)		C235	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C214	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C449	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)		C236	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C215	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C452	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)		C237	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C216	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C453	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)		C238	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C217	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R429	1-216-833-91	RES, CHIP 10K (1608)		C239	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C218	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R603	1-216-833-91	RES, CHIP 10K (1608)		C240	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C219	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
X403	1-760-928-41	VIBRATOR, CRYSTAL		C241	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C220	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
X403	1-767-300-21	VIBRATOR, CRYSTAL		C990	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C221	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
X403	1-781-266-41	VIBRATOR, CRYSTAL		*****				C222	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
X403	1-782-266-61	VIBRATOR, CRYSTAL		Ref.	Part No.	Description	Remarks	C223	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R478	1-216-833-91	RES, CHIP 10K (1608)	Mark for US model	IC607	8-752-928-45	IC CXP103049-101GG-TL	MECHACON	C224	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C291	1-162-921-91	CAP, CERAMIC 33pF CH (1608)		IC505	6-801-195-01	IC MR27V4812F-012TMZ	BOOT+DVD-ROM	C225	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
L206	1-412-960-21	INDUCTOR, SMALL TYPE 56UH (2518)		IC505	6-801-172-01	IC K3NSV104SB-TC1AT00	BOOT+DVD-ROM	C226	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C246	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF		IC405	8-759-560-17	IC RS5C348A-E2	TIMER	C231	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R409	1-218-855-91	RES, CHIP 2.2K (1608)		IC406	8-759-698-67	IC BR2880F-E2	EEPROM	C232	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R410	1-218-882-91	RES, CHIP 30K (1608)		C411	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)		C233	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R413	1-218-882-91	RES, CHIP 30K (1608)		C406	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)		C234	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
R414	1-218-855-91	RES, CHIP 2.2K (1608)		C405	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)		C235	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C212	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C454	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)		C236	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C213	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		R602	1-216-833-91	RES, CHIP 10K (1608)		C237	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C214	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		X402	1-760-928-41	VIBRATOR, CRYSTAL		C238	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C215	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		X402	1-767-300-21	VIBRATOR, CRYSTAL		C239	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C216	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		X402	1-781-266-41	VIBRATOR, CRYSTAL		C240	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C217	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		X402	1-782-266-61	VIBRATOR, CRYSTAL		C241	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C218	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		R478	1-216-833-91	RES, CHIP 10K (1608)	Mark for US model	C990	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C219	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C291	1-162-921-91	CAP, CERAMIC 33pF CH (1608)					
C220	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		L206	1-412-960-21	INDUCTOR, SMALL TYPE 56UH (2518)					
C221	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		C243	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF					
C222	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		R409	1-216-864-91	CONDUCTOR, CHIP (1608)					
C223	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)		R410	1-218-883-91	RES, CHIP 33K (1608)					
C224	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)									
C225	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)									
C226	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)									

Dissimilarity Parts List for GH015(12/22)MOUNT on SCPH-30000 R series F-type model

A-G714-504-AGH015(12/22) MOUNT on SCPH-30002 R(AU3) F-type model

Ref.	Part No.	Description	Remarks
IC607	8-752-930-05	IC CXP103049-302GG-TL	MECHACON
IC505	6-801-243-01	IC MR27V4812F-014TMZ	BOOT+DVD-ROM
IC416	6-701-551-01	IC BU9861FV-WE2	TIMER+EEPROM
C445	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	
C449	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)	
C452	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
C453	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
R429	1-216-833-91	RES, CHIP 10K (1608)	
R603	1-216-833-91	RES, CHIP 10K (1608)	
X403	1-760-928-41	VIBRATOR, CRYSTAL	
X403	1-767-300-21	VIBRATOR, CRYSTAL	
X403	1-781-266-41	VIBRATOR, CRYSTAL	
X403	1-782-266-61	VIBRATOR, CRYSTAL	
R480	1-216-841-91	RES, CHIP 47K (1608)	Mark for AU3 model
C291	1-162-923-91	CAP, CERAMIC 47pF CH (1608)	
L206	1-412-956-21	INDUCTOR, SMALL TYPE 27uH (2518)	
C246	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	
R409	1-218-855-91	RES, CHIP 2.2K (1608)	
R410	1-218-882-91	RES, CHIP 30K (1608)	
R413	1-218-882-91	RES, CHIP 30K (1608)	
R414	1-218-855-91	RES, CHIP 2.2K (1608)	
C212	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C213	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C214	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C215	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C216	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C217	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C218	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C219	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C220	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C221	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C222	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C223	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C224	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C225	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C226	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C231	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C232	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C233	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C234	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C235	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C236	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C237	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C238	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C239	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C240	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C241	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C990	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	

Ref.	Part No.	Description	Remarks
IC607	8-752-929-46	IC CXP103049-301GG-TL	MECHACON
IC505	6-801-243-01	IC MR27V4812F-014TMZ	BOOT+DVD-ROM
IC405	8-759-560-17	IC RS5C348A-E2	TIMER
IC406	8-759-698-67	IC BR2880F-E2	EEPROM
C411	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	
C405	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
C406	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)	
C454	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
R602	1-216-833-91	RES, CHIP 10K (1608)	
X402	1-760-928-41	VIBRATOR, CRYSTAL	
X402	1-767-300-21	VIBRATOR, CRYSTAL	
X402	1-781-266-41	VIBRATOR, CRYSTAL	
X402	1-782-266-61	VIBRATOR, CRYSTAL	
R480	1-216-841-91	RES, CHIP 47K (1608)	Mark for AU3 model
C291	1-162-923-91	CAP, CERAMIC 47pF CH (1608)	
L206	1-412-956-21	INDUCTOR, SMALL TYPE 27uH (2518)	
C243	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	
R409	1-216-864-91	CONDUCTOR, CHIP (1608)	
R410	1-218-883-91	RES, CHIP 33K (1608)	
R413	1-218-883-91	RES, CHIP 33K (1608)	
R414	1-216-864-91	CONDUCTOR, CHIP (1608)	
C212	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C213	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C214	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C215	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C216	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C217	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C218	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C219	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C220	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C221	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C222	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C223	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C224	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C225	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C226	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C231	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C232	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C233	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C234	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C235	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C236	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C237	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C238	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C239	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C240	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C241	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C990	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	

Dissimilarity List for GH015(12/22)MOUNT on SCPH-30000 R series F-type model

A-6714-505-A
GH015(12/22) MOUNT on SCPH-30003 R(CEL)/-30004 R(CEK) F-type model

Ref.	Part No.	Description	Remarks
IC607	8-752-928-27	IC CXP103049-202GG-TL	MECHACON
IC505	6-801-242-01	IC MR27V4812F-013TMZ	BOOT+DVD-ROM
IC416	6-701-551-01	IC BU9861FV-WE2	TIMER+EEPROM
C445	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	
C449	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)	
C452	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
C453	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
R429	1-216-833-91	RES, CHIP 10K (1608)	
R603	1-216-833-91	RES, CHIP 10K (1608)	
X403	1-760-928-41	VIBRATOR, CRYSTAL	
X403	1-767-300-21	VIBRATOR, CRYSTAL	
X403	1-781-266-41	VIBRATOR, CRYSTAL	
X403	1-782-266-61	VIBRATOR, CRYSTAL	
R479	1-216-837-91	RES,CHIP 22K (1608)	Mark for CEK model
C291	1-162-923-91	CAP, CERAMIC 47pF CH (1608)	
L206	1-412-956-21	INDUCTOR, SMALL TYPE 27uH (2518)	
C246	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	
R409	1-218-855-91	RES, CHIP 2.2K (1608)	
R410	1-218-882-91	RES, CHIP 30K (1608)	
R413	1-218-882-91	RES, CHIP 30K (1608)	
R414	1-218-855-91	RES, CHIP 2.2K (1608)	
C212	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C213	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C214	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C215	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C216	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C217	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C218	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C219	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C220	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C221	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C222	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C223	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C224	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C225	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C226	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C231	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C232	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C233	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C234	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C235	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C236	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C237	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C238	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C239	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C240	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C241	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C990	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	

Ref.	Part No.	Description	Remarks
IC607	8-752-929-37	IC CXP103049-201GG-TL	MECHACON
IC505	6-801-242-01	IC MR27V4812F-013TMZ	BOOT+DVD-ROM
IC405	8-759-560-17	IC RS5C348A-E2	TIMER
C406	8-759-698-67	IC BR2880F-E2	EEPROM
C411	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	
C406	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)	
C405	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
C454	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
R602	1-216-833-91	RES, CHIP 10K (1608)	
X402	1-760-928-41	VIBRATOR, CRYSTAL	
X402	1-767-300-21	VIBRATOR, CRYSTAL	
X402	1-781-266-41	VIBRATOR, CRYSTAL	
X402	1-782-266-61	VIBRATOR, CRYSTAL	
R479	1-216-837-91	RES,CHIP 22K (1608)	Mark for CEK model
C291	1-162-923-91	CAP, CERAMIC 47pF CH (1608)	
L206	1-412-956-21	INDUCTOR, SMALL TYPE 27uH (2518)	
C243	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	
R409	1-216-864-91	CONDUCTOR, CHIP (1608)	
R410	1-218-883-91	RES, CHIP 33K (1608)	
R413	1-218-883-91	RES, CHIP 33K (1608)	
R414	1-216-864-91	CONDUCTOR, CHIP (1608)	
C212	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C213	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C214	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C215	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C216	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C217	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C218	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C219	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C220	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C221	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C222	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C223	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C224	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C225	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C226	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C231	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C232	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C233	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C234	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C235	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C236	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C237	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C238	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C239	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C240	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C241	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	
C990	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	

A-6714-520-A GH015(12/22)MOUNT on SCPH-30007 R(TW1) F-type model

A-6714-513-A GH015(12/22)MOUNT on SCPH-30006 R(E12) F-type model

Ref.	Part No.	Description	Remarks
IC607	8-752-929-57	IC CXP103049-401GG-TL	MECHACON
IC505	6-801-492-01	IC MR27V4812F-015TMZ	BOOT+DVD-ROM
IC416	6-701-551-01	IC BU9861FV-WE2	TIMER+EEPROM
C445	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	
C449	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)	
C452	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
C453	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
R429	1-216-833-91	RES, CHIP 10K (1608)	
R603	1-216-833-91	RES, CHIP 10K (1608)	
X403	1-760-928-41	VIBRATOR, CRYSTAL	
X403	1-767-300-21	VIBRATOR, CRYSTAL	
X403	1-781-266-41	VIBRATOR, CRYSTAL	
X403	1-782-266-61	VIBRATOR, CRYSTAL	
R478	1-216-837-91	RES,CHIP 22K (1608)	Mark for E12 model
R479	1-216-853-91	RES,CHIP 470K (1608)	Mark for E12 model
C291	1-162-921-91	CAP, CERAMIC 33PF CH (1608)	
L206	1-412-960-21	INDUCTOR, SMALL TYPE 56UH (2518)	
C246	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	
R409	1-218-855-91	RES, CHIP 2.2K (1608)	
R410	1-218-882-91	RES, CHIP 30K (1608)	
R413	1-218-882-91	RES, CHIP 30K (1608)	
R414	1-218-855-91	RES, CHIP 2.2K (1608)	
C212	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C213	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C214	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C215	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C216	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C217	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C218	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C219	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C220	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C221	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C222	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C223	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C224	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C225	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C226	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C231	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C232	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C233	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C234	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C235	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C236	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C237	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C238	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C239	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C240	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C241	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C990	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	

Ref.	Part No.	Description	Remarks
IC607	8-752-929-57	IC CXP103049-4016G-TL	Mechacom
IC505	6-801-492-01	IC MR27V4812F-015TMZ	BOOT+DVD-ROM
IC416	6-701-551-01	IC BU9861FV-WE2	TIMER+EEPROM
C445	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	
C449	1-162-964-91	CAP, CHIP CERAMIC 100PF B (1608)	
C452	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
C453	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	
R429	1-216-833-91	RES, CHIP 10K (1608)	
R603	1-216-833-91	RES, CHIP 10K (1608)	
X403	1-760-928-41	VIBRATOR, CRYSTAL	
X403	1-767-300-21	VIBRATOR, CRYSTAL	
X403	1-781-266-41	VIBRATOR, CRYSTAL	
X403	1-782-266-61	VIBRATOR, CRYSTAL	
R477	1-216-853-91	RES,CHIP 470K (1608)	Mark for Tw1 model
R479	1-216-853-91	RES,CHIP 470K (1608)	Mark for Tw1 model
C291	1-162-921-91	CAP, CERAMIC 33PF CH (1608)	
L206	1-412-960-21	INDUCTOR, SMALL TYPE 56UH (2518)	
C246	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	
R409	1-218-855-91	RES, CHIP 2.2K (1608)	
R410	1-218-882-91	RES, CHIP 30K (1608)	
R413	1-218-882-91	RES, CHIP 30K (1608)	
R414	1-218-855-91	RES, CHIP 2.2K (1608)	
C212	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C213	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C214	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C215	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C216	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C217	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C218	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C219	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C220	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C221	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C222	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C223	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C224	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C225	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C226	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C231	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C232	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C233	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C234	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C235	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C236	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C237	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C238	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C239	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C240	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C241	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	
C990	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	

Common Parts List for GH015(12/22) MOUNT on SCPH-30000 R series

Ref.	Part No.	Description	Ref.	Part No.	Description	Ref.	Part No.	Description	Ref.	Part No.	Description
PWB	1-683-434-12	PWB, GH-015	C164	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF	C269	1-164-160-91	CAP, CERAMIC 20PF CH (1608)	C364	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
PWB	1-683-434-22	PWB, GH-015	C168	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C270	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C365	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
BT101	1-756-076-21	HOLDER, LITHIUM BATTERY	C170	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C271	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)			
		<CAPACITOR>	C175	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)						
C101	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF	C176	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C272	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C366	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C102	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF	C177	1-216-861-91	RES, CHIP 2.2M (1608)	C275	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C367	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C103	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF	C179	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C276	1-162-965-91	CAP, CERAMIC 1500PF B (1608)	C368	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)
C104	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C180	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C277	1-162-965-91	CAP, CERAMIC 1500PF B (1608)	C369	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)
C105	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C181	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C278	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C370	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)
C106	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C182	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C279	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C371	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)
C107	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C183	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C282	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C372	1-165-492-21	CAP, ELECT 100MF
C108	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C184	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C285	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C373	1-165-492-21	CAP, ELECT 100MF
C109	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C185	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C286	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C392	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C110	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C186	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C287	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C401	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)
C111	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C187	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C288	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C402	1-164-505-91	CAP, CHIP CERAMIC 2.2MF F (2012)
C112	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C188	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C289	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C403	1-164-937-81	CAP, CHIP CERAMIC 1000PF B (1005)
C113	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C189	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	C290	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C404	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)
C114	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C292	1-107-826-91	CAP, CHIP CERAMIC 100000PF B			
C115	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C293	1-137-765-21	CAP, ELECT 47MF			
C116	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C296	1-126-210-21	CAP, ELECT 220MF	C407	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C117	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C297	1-126-210-21	CAP, ELECT 220MF	C408	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C118	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C298	1-126-210-21	CAP, ELECT 220MF	C409	1-162-969-91	CAP, CERAMIC 6800PF B (1608)
C119	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C301	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C410	1-162-969-91	CAP, CERAMIC 6800PF B (1608)
C120	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C305	1-107-826-91	CAP, CHIP CERAMIC 100000PF B			
C121	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C306	1-164-387-91	CAP, CERAMIC 240PF CH (1608)	C414	1-162-965-91	CAP, CERAMIC 1500PF B (1608)
C122	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C307	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C415	1-162-965-91	CAP, CERAMIC 1500PF B (1608)
C123	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C308	1-165-112-91	CAP, CERAMIC 330000PF F (1608)	C416	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C124	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C309	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C417	1-164-379-91	CAP, CERAMIC 43PF CH (1608)
C125	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C310	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C418	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C126	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C311	1-162-916-91	CAP, CERAMIC 12PF CH (1608)	C419	1-162-970-91	CAP, CERAMIC 10000PF B (1608)
C127	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C312	1-162-917-91	CAP, CERAMIC 15PF CH (1608)	C420	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C128	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C313	1-162-919-91	CAP, CERAMIC 22PF CH (1608)	C421	1-127-820-91	CAP, SQUARE TYPE CHIP 4.7MF
C129	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C227	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C314	1-162-919-91	CAP, CERAMIC 22PF CH (1608)	C422	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C131	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C228	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C315	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C423	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C132	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C229	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C316	1-165-112-91	CAP, CERAMIC 330000PF F (1608)	C424	1-127-820-91	CAP, SQUARE TYPE CHIP 4.7MF
C134	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C230	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C317	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C425	1-124-779-21	CAP, ELECT 10MF
C135	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C318	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C426	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C136	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)				C319	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C427	1-117-681-21	CAP, ELECT 100MF
C137	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C320	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C430	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C138	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C321	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C431	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C139	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C322	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C432	1-107-725-91	CAP, CERAMIC 100000PF B (2012)
C140	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C323	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C433	1-107-725-91	CAP, CERAMIC 100000PF B (2012)
C141	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF				C324	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C434	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)
C142	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C325	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C435	1-115-566-91	CAP, CERAMIC 4.7MF B
C143	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C326	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C437	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C144	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C327	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C438	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C145	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C328	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C439	1-165-643-21	CAP, ELECT 150MF
C146	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C242	1-135-609-91	CAP, CHIP TANTALUM ELECT 220MF	C329	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C441	1-165-643-21	CAP, ELECT 150MF
C147	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)				C330	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C443	1-165-880-21	CAP, ELECT 220MF
C148	1-107-826-91	CAP, CHIP CERAMIC 100000PF B				C331	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C444	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C149	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C244	1-128-707-22	CAP, TANTALUM ELECT (SMD)220	C332	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C446	1-165-880-21	CAP, ELECT 220MF
C150	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C245	1-128-707-22	CAP, TANTALUM ELECT (SMD)220	C333	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C447	1-107-682-91	CAP, CERAMIC 1000000PF B 3216
C151	1-164-160-91	CAP, CERAMIC 20PF CH (1608)				C334	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C450	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C152	1-164-160-91	CAP, CERAMIC 20PF CH (1608)	C247	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C335	1-162-970-91	CAP, CERAMIC 10000PF B (1608)			
C153	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C248	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)				C455	1-127-820-91	CAP, SQUARE TYPE CHIP 4.7MF
C154	1-162-970-91	CAP, CERAMIC 10000PF B (1608)				C249	1-115-156-91	CAP, CERAMIC 1000000PF F (1608)	C456	1-127-760-91	CAP, CERAMIC 4.7MF (2012)
C155	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C254	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C250	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C458	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)
C156	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C255	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C256	1-107-826-91	CAP, CHIP CERAMIC 1000000PF B	C462	1-163-009-91	CAP, CHIP CERAMIC 1000PF B (2012)
C157	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C257	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C257	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C465	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C158	1-162-970-91	CAP, CERAMIC 10000PF B (1608)				C261	1-128-004-21	CAP, ELECT (CHIP) 10MF	C467	1-126-209-21	CAP, ELECT 100MF
C159	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C262	1-128-004-21	CAP, ELECT (CHIP) 10MF	C262	1-128-004-21	CAP, ELECT (CHIP) 10MF	C469	1-164-227-91	CAP, CERAMIC 22000PF B (1608)
C160	1-162-925-91	CAP, CERAMIC 68PF CH (1608)	C263	1-128-004-21	CAP, ELECT (CHIP) 10MF	C263	1-128-004-21	CAP, ELECT (CHIP) 10MF	C470	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C161	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF	C265	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	C265	1-117-720-91	CAP, CERAMIC 4.7MF F (2012)	C471	1-218-887-91	RES, CHIP 47K (1608)
C162	1-162-925-91	CAP, CERAMIC 68PF CH (1608)	C266	1-128-004-21	CAP, ELECT (CHIP) 10MF				C472	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C163	1-128-964-91	CAP, CHIP TANTALUM ELECT 100MF				C267	1-126-210-21	CAP, ELECT 220MF	C473	1-162-970-91	CAP, CERAMIC 10000PF B (1608)
			C268	1-126-210-21	CAP, ELECT 220MF	C268	1-126-210-21	CAP, ELECT 220MF	C474	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
						C355	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C475	1-164-227-91	CAP, CERAMIC 22000PF B (1608)
						C356	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B (1005)	C476	1-107-725-91	CAP, CERAMIC 100000PF B (2012)
						C363	1-107-826-91	CAP, CHIP CERAMIC 100000PF B			

Ref.	Part No.	Description	Ref.	Part No.	Description	Ref.	Part No.	Description	Ref.	Part No.	Description
C477	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C634	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C797	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C898	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)
C478	1-126-209-21	CAP, ELECT 100MF	C635	1-162-968-91	CAP, CHIP CERAMIC 4700PF B (1608)	C798	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C899	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)
C480	1-107-725-91	CAP, CERAMIC 100000PF B (2012)	C636	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C801	1-115-467-91	CAP, CHIP CERAMIC0.22MF B (1608)	C901	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C482	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C637	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C802	1-115-467-91	CAP, CHIP CERAMIC0.22MF B (1608)	C902	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C483	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C638	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C803	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C903	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C485	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C639	1-164-217-91	CAP, CERAMIC 150PF CH (1608)	C804	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C904	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C486	1-137-765-21	CAP, ELECT 47MF	C640	1-135-259-91	CAP, CHIP TANTALUM ELECT 10MF	C805	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C905	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C487	1-165-874-21	CAP, ELECT 120MF	C642	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C806	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C906	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C488	1-115-566-91	CAP, CERAMIC 4.7MF B	C643	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C807	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C907	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C489	1-165-874-21	CAP, ELECT 120MF	C644	1-164-230-91	CAP, CERAMIC 220PF CH (1608)	C808	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C908	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C490	1-126-209-21	CAP, ELECT 100MF	C645	1-165-176-91	CAP, CERAMIC 47000PF B (1608)	C809	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C909	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C491	1-126-209-21	CAP, ELECT 100MF	C646	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C810	1-104-851-91	CAP, CHIP TANTALUM ELECT 10MF	C910	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C494	1-107-725-91	CAP, CERAMIC 100000PF B (2012)	C647	1-117-863-91	CAP, CHIP CERAMIC0.47MF B (1608)	C811	1-135-900-21	CAP, TANTALUM ELECT 22MF	C911	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C495	1-125-837-91	CAP, CHIP CERAMIC 1MF F (1608)	C648	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C812	1-164-730-91	CAP, CERAMIC 1200PF B (1608)	C912	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C496	1-107-682-91	CAP, CERAMIC 1000000PF B (3216)	C649	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C819	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C913	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C497	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C650	1-164-230-91	CAP, CERAMIC 220PF CH (1608)	C821	1-104-851-91	CAP, CHIP TANTALUM ELECT 10MF	C914	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C498	1-127-760-91	CAP, CERAMIC 4.7MF (2012)	C651	1-162-966-91	CAP, CERAMIC 2200PF B (1608)	C824	1-135-900-21	CAP, TANTALUM ELECT 22MF	C915	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C499	1-164-505-91	CAP, CHIP CERAMIC 2.2MF F (2012)	C652	1-107-826-91	CAP, CHIP CERAMIC 1000000PF B	C825	1-164-730-91	CAP, CERAMIC 1200PF B (1608)	C916	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C501	1-164-346-91	CAP, CHIP CERAMIC 1MF F (2012)	C653	1-162-966-91	CAP, CERAMIC 2200PF B (1608)	C826	1-164-677-91	CAP, CERAMIC 33000PF B (1608)	C917	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C502	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C654	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C827	1-162-966-91	CAP, CERAMIC 2200PF B (1608)	C918	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C503	1-163-009-91	CAP, CHIP CERAMIC 1000PF B (2012)	C655	1-135-259-91	CAP, CHIP TANTALUM ELECT 10MF	C828	1-162-966-91	CAP, CERAMIC 2200PF B (1608)	C919	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C504	1-164-346-91	CAP, CHIP CERAMIC 1MF F (2012)	C656	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C829	1-162-966-91	CAP, CERAMIC 2200PF B (1608)	C920	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C507	1-163-009-91	CAP, CHIP CERAMIC 1000PF B (2012)	C657	1-164-230-91	CAP, CERAMIC 220PF CH (1608)	C830	1-162-966-91	CAP, CERAMIC 2200PF B (1608)	C921	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C508	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C658	1-164-230-91	CAP, CERAMIC 220PF CH (1608)	C831	1-162-975-91	CAP, CERAMIC 24PF CH (1608)	C922	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C509	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C660	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C832	1-115-467-91	CAP, CHIP CERAMIC0.22MF B (1608)	C923	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C510	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C661	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C834	1-163-038-91	CAP, CERAMIC 100000PF F (2012)	C924	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C513	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C662	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C835	1-127-692-91	CAP, CHIP CERAMIC 10MF B (3225)	C925	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C514	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C664	1-135-259-91	CAP, CHIP TANTALUM ELECT 10MF	C836	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C926	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C516	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C665	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C837	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C927	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C517	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C666	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C839	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C928	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C518	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C667	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C840	1-107-826-91	CAP, CHIP CERAMIC 100000PF B (1608)	C929	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C521	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C668	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C843	1-162-970-91	CAP, CERAMIC 100000PF B (1608)	C930	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C522	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C671	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C844	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C931	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C523	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C672	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C845	1-162-970-91	CAP, CERAMIC 1000PF B (1608)	C932	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C524	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C673	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C848	1-107-823-91	CAP, CERAMIC 470000PF B (2012)	C933	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C525	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C674	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C850	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C934	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C527	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C675	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C851	1-162-970-91	CAP, CERAMIC 10000PF B (1608)	C935	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C528	1-125-837-91	CAP, CHIP CERAMIC 1MF B (1608)	C676	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C853	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C936	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C529	1-128-008-21	CAP, ELECT (CHIP) 3.3MF	C684	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C854	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C937	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C530	1-128-008-21	CAP, ELECT (CHIP) 3.3MF	C685	1-117-863-91	CAP, CHIP CERAMIC0.47MF B (1608)	C855	1-115-467-91	CAP, CHIP CERAMIC0.22MF B (1608)	C938	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C533	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C688	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C857	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C939	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C534	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C693	1-162-912-91	CAP, CERAMIC 7.0PF CH (1608)	C859	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C940	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C535	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C694	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C860	1-164-173-91	CAP, CERAMIC 3900PF B (1608)	C941	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C536	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C695	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C862	1-164-739-91	CAP, CERAMIC 560PF CH (1608)	C942	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C537	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C701	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C863	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C943	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C538	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C702	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C866	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C944	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C539	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C703	1-165-795-21	CAP, CERAMIC 100PF CH (3216)	C868	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C945	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C540	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C711	1-135-346-21	CAP, SOLID ELECT 39MF	C869	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C946	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C541	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C712	1-162-970-91	CAP, CERAMIC 100000PF B (1608)	C870	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C947	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C542	1-162-927-91	CAP, CERAMIC 100PF CH (1608)	C714	1-135-346-21	CAP, SOLID ELECT 39MF	C871	1-164-677-91	CAP, CERAMIC 33000PF B (1608)	C948	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C543	1-113-619-91	CAP, CERAMIC 470000PF F (1608)	C716	1-165-874-21	CAP, ELECT 120MF	C872	1-115-467-91	CAP, CHIP CERAMIC0.22MF B (1608)	C949	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C544	1-137-765-21	CAP, ELECT 47MF	C717	1-135-346-21	CAP, SOLID ELECT 39MF	C873	1-164-392-91	CAP, CERAMIC 390PF CH (1608)	C950	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C545	1-137-765-21	CAP, ELECT 47MF	C718	1-135-346-21	CAP, SOLID ELECT 39MF	C874	1-164-677-91	CAP, CERAMIC 33000PF B (1608)	C951	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C601	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C722	1-164-937-81	CAP, CHIP CERAMIC 1000PF B (1005)	C875	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C952	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C603	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C723	1-137-766-21	CAP, ELECT 68MF	C876	1-125-838-91	CAP, CHIP CERAMIC2.2MF B (2012)	C953	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C605	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C724	1-137-765-21	CAP, ELECT 47MF	C877	1-164-173-91	CAP, CERAMIC 3900PF B (1608)	C954	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C606	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C725	1-124-779-21	CAP, ELECT 10MF	C879	1-164-739-91	CAP, CERAMIC 560PF CH (1608)	C955	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C607	1-162-968-91	CAP, CHIP CERAMIC 4700PF B (1608)	C727	1-162-964-91	CAP, CHIP CERAMIC 1000PF B (1608)	C880	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C956	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C609	1-164-739-91	CAP, CERAMIC 560PF CH (1608)	C730	1-127-820-91	CAP, SQUARE TYPE CHIP 4.7MF	C882	1-127-692-91	CAP, CHIP CERAMIC 10MF B (3225)	C957	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C623	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C731	1-165-811-91	CAP, CHIP CERAMIC 22MF B (4532)	C883	1-163-038-91	CAP, CERAMIC 100000PF F (2012)	C958	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C624	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C732	1-165-811-91	CAP, CHIP CERAMIC 22MF B (4532)	C888	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C959	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C625	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C791	1-164-245-91	CAP, CERAMIC 15000PF B (1608)	C889	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C960	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C629	1-164-156-91	CAP, CHIP CERAMIC 0.1MF F (1608)	C792	1-104-851-91	CAP, CHIP TANTALUM ELECT 10MF	C890	1-104-851-91	CAP, CHIP TANTALUM ELECT 10MF	C961	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C630	1-164-173-91	CAP, CERAMIC 3900PF B (1608)	C793	1-164-505-91	CAP, CHIP CERAMIC 2.2MF F (2012)	C891	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	C962	1-107-826-91	CAP, CHIP CERAMIC 100000PF B
C631	1-162-968-91	CAP, CHIP CERAMIC 4700PF B (1608)	C794	1-163-009-91	CAP, CHIP CERAMIC 1000PF B (2012)	C895	1-162-964-91	CAP, CHIP CERAMIC 1			

Ref.	Part No.	Description	
C966	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	(1608)
C967	1-125-837-91	CAP, CHIP CERAMIC 1MF B	
C968	1-125-837-91	CAP, CHIP CERAMIC 1MF B	(1608)
C980	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C981	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C982	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C983	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C984	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C985	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C986	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C987	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C988	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C989	1-107-826-91	CAP, CHIP CERAMIC 100000PF B	
C991	1-113-619-91	CAP, CERAMIC 470000PF F	(1608)
C992	1-113-619-91	CAP, CERAMIC 470000PF F	(1608)
C993	1-128-004-21	CAP, ELECT (CHIP) 10MF	
C994	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B	(1005)
C995	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B	(1005)
C996	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B	(1005)
C997	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B	(1005)
C998	1-125-777-81	CAP, CHIP CERAMIC 0.1MF B	(1005)
<CONNECTOR>			
CN201	1-815-631-11	CONNECTOR, SQUARE TYPE 12P	
CN302	1-794-206-21	CONNECTOR, FFC/FPC (ZIF) 36P	
CN303	1-694-822-11	TERMINAL BOARD (LINK/USB)	
CN401	1-815-630-11	PIN, CONNECTOR 4P	
CN401	1-816-242-11	PIN, CONNECTOR 4P	
CN403	1-784-650-21	CONNECTOR 2P	
CN406	1-779-345-11	CONNECTOR, FFC/FPC 7P	
CN501	1-476-736-11	TRANSMITTER UNIT, LIGHT	
CN504	1-815-632-11	CONNECTOR BOARD TO BOARD 110P	
CN801	1-794-237-21	CONNECTOR, FFC/FPC 30P	
CN802	1-816-184-21	CONNECTOR, FFC/FPC 5P	
CN803	1-770-687-11	CONNECTOR, FFC/FPC 4P	
CN803	1-779-206-21	CONNECTOR, FFC(LIF(NON-ZIF)4P	
CN804	1-794-194-21	CONNECTOR, FFC/FPC 13P	
CN804	1-816-226-21	CONNECTOR, FFC/FPC 13P	
<NETWORK>			
CP201	1-234-724-21	NETWORK, RC	(3216)
<DIODE>			
D201	8-719-065-78	DIODE MAZF12000LS0	
D201	8-719-082-01	DIODE MM3Z12VT1	
D202	6-500-009-01	DIODE RSE6.8XN-TR	
D202	6-500-044-01	DIODE DFGA6.8FU(TE85R)	
D202	6-500-045-01	DIODE MAZB068H0LS0	
D202	6-500-053-01	DIODE DFGA6.8FUT1	
D203	6-500-009-01	DIODE RSE6.8XN-TR	
D203	6-500-044-01	DIODE DFGA6.8FU(TE85R)	
D203	6-500-045-01	DIODE MAZB068H0LS0	
D203	6-500-053-01	DIODE DFGA6.8FUT1	
D208	6-500-009-01	DIODE RSE6.8XN-TR	
D208	6-500-044-01	DIODE DFGA6.8FU(TE85R)	
D208	6-500-045-01	DIODE MAZB068H0LS0	
D208	6-500-053-01	DIODE DFGA6.8FUT1	
D301	8-719-027-76	DIODE ISS357-TPH3	
D301	8-719-058-24	DIODE RB501V-40TE-17	
D301	8-719-071-87	DIODE MA785-(TX),SO	
D302	8-719-027-76	DIODE ISS357-TPH3	
D302	8-719-058-24	DIODE RB501V-40TE-17	
D302	8-719-071-87	DIODE MA785-(TX),SO	
D402	8-719-074-34	DIODE RB495D-T146	
D402	8-719-081-84	DIODE HRW0202BTL	

Ref.	Part No.	Description	
D403	8-719-074-34	DIODE RB495D-T146	
D403	8-719-081-84	DIODE HRW0202BTL	
D404	8-719-033-15	DIODE HND202FU-TE85R	
D405	8-719-066-98	DIODE RB051L-40TE25	
D405	8-719-078-04	DIODE EC31QS03L-TE12L	
D405	8-719-085-58	DIODE EC30HA03L-TE12L	
D407	8-719-074-34	DIODE RB495D-T146	
D407	8-719-081-84	DIODE HRW0202BTL	
D408	8-719-074-34	DIODE RB495D-T146	
D408	8-719-081-84	DIODE HRW0202BTL	
D500	8-719-024-81	DIODE ISS300-TE85L	
D500	8-719-941-21	DIODE DAP202UT106	
D501	8-719-082-76	DIODE CL-201TLV-C-TU	
D801	8-719-065-68	DIODE MAZF04700LS0	
D801	8-719-082-00	DIODE MM3Z4V7T1	
D802	8-719-065-68	DIODE MAZF04700LS0	
D802	8-719-082-00	DIODE MM3Z4V7T1	
<FUSE>			
△ F001	1-576-434-21	FUSE, CHIP	
△ F001	1-576-434-41	FUSE, CHIP	
△ F001	1-576-438-21	FUSE, CHIP	
<FERRITE BEAD>			
FB102	1-469-667-21	FERRITE, EMI (SMD)	
FB103	1-469-667-21	FERRITE, EMI (SMD)	
FB104	1-469-667-21	FERRITE, EMI (SMD)	
FB105	1-469-667-21	FERRITE, EMI (SMD)	
FB201	1-414-813-21	FERRITE, EMI (SMD)	
FB202	1-500-113-22	BEAD, FERRITE (CHIP)	
FB203	1-500-113-22	BEAD, FERRITE (CHIP)	
FB204	1-500-113-22	BEAD, FERRITE (CHIP)	
FB205	1-500-113-22	BEAD, FERRITE (CHIP)	
FB206	1-500-113-22	BEAD, FERRITE (CHIP)	
FB303	1-400-154-21	FERRITE, EMI	
FB305	1-414-555-21	FERRITE, EMI (SMD)	
FB308	1-400-154-21	FERRITE, EMI	
FB310	1-414-555-21	FERRITE, EMI (SMD)	
FB313	1-469-324-21	FERRITE, EMI (SMD)	
FB314	1-469-324-21	FERRITE, EMI (SMD)	
FB315	1-469-324-21	FERRITE, EMI (SMD)	
FB316	1-469-324-21	FERRITE, EMI (SMD)	
FB317	1-469-110-21	FERRITE, EMI (SMD)	
FB318	1-469-110-21	FERRITE, EMI (SMD)	
FB319	1-469-110-21	FERRITE, EMI (SMD)	
FB320	1-469-110-21	FERRITE, EMI (SMD)	
FB321	1-469-110-21	FERRITE, EMI (SMD)	
FB322	1-469-110-21	FERRITE, EMI (SMD)	
FB323	1-469-110-21	FERRITE, EMI (SMD)	
FB324	1-469-110-21	FERRITE, EMI (SMD)	
FB408	1-469-667-21	FERRITE, EMI (SMD)	
FB801	1-469-562-21	FERRITE, EMI (SMD)	
FB802	1-469-562-21	FERRITE, EMI (SMD)	
<FILTER>			
FL204	1-234-738-21	FILTER, EMI (ARRAY)	(3216)
FL303	1-234-725-21	NETWORK, RC (USB)	(4022)
<IC>			
IC101	8-759-831-20	IC CY2212ZC-2T	
IC102	6-800-080-01	IC TC59RM716GB-8DYELZ	
IC102	8-759-666-89	IC TC59RM716GB-8(YEL)	
IC103	6-800-080-01	IC TC59RM716GB-8(YEL)	
IC103	8-759-666-89	IC TC59RM716GB-8(YEL)	
IC104	8-759-699-09	IC CXD9615GB	
IC105	6-700-742-01	IC LM70C1MMX-3	

Ref.	Part No.	Description	
IC106	6-700-967-01	IC CY24141ZC-3T	
IC202	6-701-570-01	IC CXD2949GB-T7	
IC205	6-701-557-01	IC SC44728CPBEB	
IC206	8-752-093-56	IC CXA3525R-T4	
IC206	8-752-099-53	IC CXA3525BR-T4	
IC207	8-759-691-00	IC JCP78M05COTRR	
IC207	8-759-697-61	IC L78M05CDT-TR(P)	
IC209	6-701-174-01	IC MM1573DNLE	
IC209	6-701-602-01	IC LP2985IMX-3.3P	
IC210	6-701-556-01	IC SC44750PBEB	
IC303	6-701-662-01	IC CXD9600GB	
IC305	6-700-119-01	IC T5N88(YEL)	
IC305	6-700-549-01	IC K4Q153212MJC60T	
IC402	6-800-967-01	IC TMP87C807U-2C64	
IC403	6-700-665-01	IC MM1550AFBE	
IC404	6-700-664-01	IC SN195216DBTR	
IC407	6-701-051-01	IC SPF3001-R1	
IC407	6-701-052-01	IC MM1582XHB	
IC407	6-701-053-01	IC SCY99009PWR2	
IC409	6-700-946-01	IC MB3889PFT-G-BND-ER	
IC413	6-700-233-01	IC MM1573ZNL	
IC413	6-700-968-01	IC MM1573FNLE	
IC413	8-759-598-12	IC LP2985IM5X-3.5	
IC414	6-701-175-01	IC MC7808CDDT5	
IC414	8-759-069-41	IC TA7808F(Te16L)	
IC414	8-759-473-16	IC BA17808FP-E2	
IC414	8-759-697-62	IC NJM7808DL1A(Te1)	
IC415	8-759-581-11	IC NJM2125F(Te2)	
IC501	6-701-214-01	IC CXD9611BR	
IC502	6-701-050-01	IC MSM10V976F-50TKR1	
IC502	8-759-712-79	IC K4E151612D-TL50T00	
IC502	8-759-712-80	IC MT4LC1M16E5TG-5TR	
IC502	8-759-712-81	IC GM71V18163CT-5T	
IC502	8-759-712-82	IC SDMV18165CTM6S	
IC504	8-752-416-23	IC CXD2950R-TL	
IC517	8-759-667-10	IC CS4335-KS	
IC603	8-759-370-11	IC NJM2100V-TE2	
IC605	8-752-416-13	IC CXD1886Q	
IC801	6-700-585-01	IC SP3727AF-A0PMR	
IC802	8-759-697-65	IC BA5815FM-E2	
IC803	8-759-588-60	IC BA6664FM-E2	
IC805	8-759-712-38	IC HD74HC1G66CME	
IC805	8-759-712-63	IC MC74VHC1G66DFT1	
IC806	8-759-693-13	IC NJM12904V(Te2)	
IC807	8-759-691-00	IC JCP78M05COTRR	
IC807	8-759-697-61	IC L78M05CDT-TR(P)	
<INDUCTOR>			
L102	1-469-525-91	INDUCTOR 10UH (NLFV25)	
L102	1-469-967-21	INDUCTOR, CHIP 10UH	(2518)
L103	1-469-525-91	INDUCTOR 10UH (NLFV25)	
L103	1-469-967-21	INDUCTOR, CHIP 10UH	(2518)
L105	1-414-771-91	INDUCTOR 10.0UH	
L106	1-414-771-91	INDUCTOR 10.0UH	
L203	1-469-525-91	INDUCTOR 10UH (NLFV25)	
L203	1-469-967-21	INDUCTOR, CHIP 10UH	(2518)
L401	1-411-197-21	COIL, DD CONVERTER	
L401	1-424-788-21	COIL, CHOKE (SMD) 10UH	
L401	1-424-922-21	COIL, CHOKE (SMD) 10UH	
L404	1-424-854-31	COIL (SMD), CHOKE 2.0UH	
L404	1-424-912-21	COIL, CHOKE (SMD) 2.7UH	
L404	1-424-914-21	COIL, CHOKE (SMD) 2.2UH	
L404	1-424-920-21	COIL, CHOKE (SMD) 2.4UH	
L408	1-419-898-21	COIL, CHOKE 5.6UH	

Ref.	Part No.	Description	
L408	1-419-902-21	COIL, CHOKE (SMD) 5.6UH	
L410	1-411-197-21	COIL, DD CONVERTER	
L410	1-424-788-21	COIL, CHOKE (SMD) 10UH	
L410	1-424-922-21	COIL, CHOKE (SMD) 10UH	
L411	1-424-789-41	COIL, CHOKE (SMD) 10UH	
L411	1-424-916-21	COIL, CHOKE (SMD) 10UH	
L411	1-424-918-21	COIL, CHOKE (SMD) 10UH	
L412	1-411-197-21	COIL, DD CONVERTER	
L412	1-424-788-21	COIL, CHOKE (SMD) 10UH	
L412	1-424-922-21	COIL, CHOKE (SMD) 10UH	
L413	1-424-789-41	COIL, CHOKE (SMD) 10UH	
L413	1-424-916-21	COIL, CHOKE (SMD) 10UH	
L413	1-424-918-21	COIL, CHOKE (SMD) 10UH	
L414	1-424-789-41	COIL, CHOKE (SMD) 10UH	
L414	1-424-916-21	COIL, CHOKE (SMD) 10UH	
L414	1-424-918-21	COIL, CHOKE (SMD) 10UH	
L801	1-400-073-21	INDUCTOR, CHIP 4.7UH	(2518)
L801	1-469-524-91	INDUCTOR 4.7UH (NLFV25)	
L802	1-400-073-21	INDUCTOR, CHIP 4.7UH	(2518)
L802	1-469-524-91	INDUCTOR 4.7UH (NLFV25)	
L803	1-414-394-41	INDUCTOR (SMD) 2.2UH	
<COIL>			
LF352	1-428-877-21	COIL, COMMON MODE CHOKE	
<LINK>			
PS001	1-576-519-21	FUSE, MICRO (1608) TYPE)	
PS002	1-576-519-21	FUSE, MICRO (1608) TYPE)	
PS003	1-576-398-21	RINK, IC (CCP2E63)	
PS004	1-576-398-21	RINK, IC (CCP2E63)	
PS005	1-533-915-41	RINK, CHIP IC	
PS005	1-576-259-21	RINK, IC	
PS006	1-576-586-21	FUSE, MICRO (1608) TYPE)	
PS007	1-533-915-41	RINK, CHIP IC	
PS007	1-576-259-21	RINK, IC	
PS008	1-533-940-21	RINK, CHIP IC	
PS008	1-576-282-21	RINK, SQUARE CHIP TYPE IC	
PS009	1-533-282-21	LINK, IC	
PS010	1-533-282-21	LINK, IC	
PS011	1-533-282-21	LINK, IC	
PS012	1-533-940-21	RINK, CHIP IC	
PS012	1-576-282-21	RINK, SQUARE CHIP TYPE IC	
PS013	1-533-915-41	RINK, CHIP IC	
PS013	1-576-259-21	RINK, IC	
<TRANSISTOR>			
Q201	8-729-026-50	TRANSISTOR 2SA1037AK-T146-QR	
Q204	6-550-073-01	TRANSISTOR HN1B01FDW1T1	
Q204	8-729-049-77	TRANSISTOR HN1B01F-GR(T5LSONY)	
Q205	8-729-013-22	TRANSISTOR HN1A01FU-TE85R	
Q205	8-729-055-85	TRANSISTOR UMT1N-TN	
Q205	8-729-427-71	TRANSISTOR XP4401-TXE	
Q300	6-550-076-01	TRANSISTOR MUN5213T1	
Q300	8-729-013-97	TRANSISTOR R1N304-TE85L	
Q300	8-729-029-14	TRANSISTOR DTC14064A-T106	
Q301	6-550-027-01	TRANSISTOR FDS6375	
Q301	6-550-028-01	TRANSISTOR IRF7233-TR	
Q401	8-729-054-35	TRANSISTOR HAT2070R-EL	
Q401	8-729-055-58	TRANSISTOR SI4894DY-T1	
Q402	8-729-053-79	TRANSISTOR IRF7901DI-T1	
Q402	8-729-053-80	TRANSISTOR SI4830DY-TR	
Q402	8-729-054-68	TRANSISTOR FDS6986S	
Q404	8-729-051-62	TRANSISTOR IRF7809A-TR	
Q404	8-729-052-07	TRANSISTOR HAT2064R-EL	
Q404	8-729-054-64	TRANSISTOR IRF7455-TR	
Q405	8-729-014-43	TRANSISTOR RN1904-TE85R	

Ref.	Part No.	Description
Q405	8-729-052-36	TRANSISTOR UMH2NTN
Q405	8-729-427-47	TRANSISTOR XP4213-TXE
Q406	8-729-053-79	TRANSISTOR IRF7901D1-TR
Q406	8-729-053-80	TRANSISTOR SI4830DY-T1
Q406	8-729-054-68	TRANSISTOR FDS6986S
Q407	8-729-046-04	TRANSISTOR FDS6690A
Q407	8-729-054-66	TRANSISTOR HAT2071R-EL
Q408	8-729-051-61	TRANSISTOR IRF7807D1-TR
Q408	8-729-054-67	TRANSISTOR FDS6690S
Q409	6-550-076-01	TRANSISTOR MUN5213T1
Q409	8-729-013-97	TRANSISTOR RN1304-TE85L
Q409	8-729-029-14	TRANSISTOR DTC144EUA-T106
Q410	6-550-076-01	TRANSISTOR MUN5213T1
Q410	8-729-013-97	TRANSISTOR RN1304-TE85L
Q410	8-729-029-14	TRANSISTOR DTC144EUA-T106
Q411	6-550-027-01	TRANSISTOR FDS6375
Q411	6-550-028-01	TRANSISTOR IRF7323-TR
Q412	6-550-026-01	TRANSISTOR IRF7328-TR
Q412	6-550-036-01	TRANSISTOR FDS4935
Q412	6-550-068-01	TRANSISTOR SI4943DY-T1
Q415	8-729-052-41	TRANSISTOR 2SC4541 (2TL SONY1)
Q415	8-729-209-77	TRANSISTOR 2SC2873Y-TE12L
Q505	8-729-021-09	TRANSISTOR RN4904(TE85R)
Q506	8-729-056-15	TRANSISTOR IMH20T108
Q600	8-729-016-26	TRANSISTOR 2SK1958-T1
Q600	8-729-048-50	TRANSISTOR 2SK3018-T106
Q603	8-729-017-33	TRANSISTOR RN1706-TE85R
Q801	6-550-008-01	TRANSISTOR UM6K1N-TN
Q801	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)
Q801	6-550-017-01	TRANSISTOR XP0487800LS0
Q802	8-729-014-02	TRANSISTOR RN1306-TE85L
Q802	8-729-029-13	TRANSISTOR DTC143ZUA-T106
Q804	8-729-055-22	TRANSISTOR 2SA1734(TE12L)
Q804	8-729-103-96	TRANSISTOR 2SB798-T1DL
Q805	8-729-055-22	TRANSISTOR 2SA1734(TE12L)
Q805	8-729-103-96	TRANSISTOR 2SB798-T1DL
Q806	8-729-016-26	TRANSISTOR 2SK1958-T1
Q806	8-729-048-50	TRANSISTOR 2SK3018-T106
Q808	6-550-008-01	TRANSISTOR UM6K1N-TN
Q808	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)
Q808	6-550-017-01	TRANSISTOR XP0487800LS0
Q814	8-729-014-02	TRANSISTOR RN1306-TE85L
Q814	8-729-029-13	TRANSISTOR DTC143ZUA-T106
<RESISTOR>		
R101	1-211-983-91	RES, CHIP 39
R102	1-208-866-81	RES, CHIP 130
R103	1-211-983-91	RES, CHIP 39
R104	1-208-866-81	RES, CHIP 130
R106	1-216-809-91	RES, CHIP 100
R107	1-216-809-91	RES, CHIP 100
R109	1-218-961-81	RES, CHIP 4.7K
R110	1-211-983-91	RES, CHIP 39
R111	1-211-983-91	RES, CHIP 39
R112	1-211-989-91	RES, CHIP 68
R113	1-211-989-91	RES, CHIP 68
R114	1-211-983-91	RES, CHIP 39
R115	1-211-983-91	RES, CHIP 39
R116	1-211-983-91	RES, CHIP 39
R117	1-211-983-91	RES, CHIP 39
R118	1-211-973-91	RES, CHIP 15
R119	1-211-973-91	RES, CHIP 15
R120	1-211-973-91	RES, CHIP 15
R121	1-211-973-91	RES, CHIP 15
R131	1-216-833-91	RES, CHIP 10K
R132	1-216-833-91	RES, CHIP 10K

Ref.	Part No.	Description
R133	1-216-833-91	RES, CHIP 10K
R134	1-218-965-81	RES, CHIP 10K
R139	1-216-801-91	RES, CHIP 22
R145	1-218-953-81	RES, CHIP 1.0K
R146	1-216-821-91	RES, CHIP 1.0K
R147	1-216-821-91	RES, CHIP 1.0K
R158	1-216-803-91	RES, CHIP 33
R159	1-216-803-91	RES, CHIP 33
R164	1-216-864-91	CONDUCTOR, CHIP
R185	1-216-829-91	RES, CHIP 4.7K
R188	1-216-829-91	RES, CHIP 4.7K
R196	1-218-933-81	RES, CHIP 22
R201	1-216-829-91	RES, CHIP 4.7K
R202	1-216-833-91	RES, CHIP 10K
R203	1-218-851-91	RES, CHIP 1.5K
R212	1-218-961-81	RES, CHIP 4.7K
R213	1-218-961-81	RES, CHIP 4.7K
R214	1-216-864-91	CONDUCTOR, CHIP
R217	1-216-864-91	CONDUCTOR, CHIP
R220	1-218-933-81	RES, CHIP 22
R225	1-216-833-91	RES, CHIP 10K
R226	1-216-833-91	RES, CHIP 10K
R227	1-216-864-91	CONDUCTOR, CHIP
R236	1-216-809-91	RES, CHIP 100
R244	1-218-825-91	RES, CHIP 120
R245	1-218-825-91	RES, CHIP 120
R246	1-218-825-91	RES, CHIP 120
R250	1-216-864-91	CONDUCTOR, CHIP
R251	1-216-837-91	RES, CHIP 22K
R252	1-216-839-91	RES, CHIP 33K
R253	1-216-833-91	RES, CHIP 10K
R257	1-216-824-91	RES, CHIP 1.8K
R258	1-208-923-81	RES, CHIP 33K
R259	1-216-824-91	RES, CHIP 1.8K
R261	1-216-829-91	RES, CHIP 4.7K
R263	1-216-825-91	RES, CHIP 2.2K
R264	1-216-821-91	RES, CHIP 1.0K
R265	1-216-821-91	RES, CHIP 1.0K
R270	1-218-853-91	RES, CHIP 1.8K
R272	1-218-859-91	RES, CHIP 3.3K
R273	1-218-851-91	RES, CHIP 1.5K
R277	1-218-853-91	RES, CHIP 1.8K
R278	1-218-859-91	RES, CHIP 3.3K
R279	1-218-851-91	RES, CHIP 1.5K
R292	1-216-833-91	RES, CHIP 10K
R300	1-216-864-91	CONDUCTOR, CHIP
R301	1-216-845-91	RES, CHIP 100K
R307	1-208-857-81	RES, CHIP 56
R308	1-208-904-81	RES, CHIP 5.1K
R309	1-211-987-91	RES, CHIP 56
R310	1-211-987-91	RES, CHIP 56
R311	1-216-829-91	RES, CHIP 4.7K
R312	1-208-857-81	RES, CHIP 56
R315	1-218-866-91	RES, CHIP 6.2K
R316	1-216-797-91	RES, CHIP 10
R320	1-219-570-91	RES, CHIP 10M
R321	1-216-813-91	RES, CHIP 220
R322	1-216-857-91	RES, CHIP 1.0M
R324	1-216-833-91	RES, CHIP 10K
R327	1-216-821-91	RES, CHIP 1.0K
R328	1-216-841-91	RES, CHIP 47K
R329	1-216-797-91	RES, CHIP 10
R331	1-216-797-91	RES, CHIP 10
R347	1-211-986-91	RES, CHIP 51
R349	1-216-821-91	RES, CHIP 1.0K
R350	1-216-805-91	RES, CHIP 47

Ref.	Part No.	Description
R352	1-216-797-91	RES, CHIP 10
R365	1-216-805-91	RES, CHIP 47
R366	1-218-937-81	RES, CHIP 47
R367	1-216-805-91	RES, CHIP 47
R368	1-216-805-91	RES, CHIP 47
R390	1-216-857-91	RES, CHIP 1.0M
R391	1-216-833-91	RES, CHIP 10K
R392	1-216-801-91	RES, CHIP 22
R393	1-216-801-91	RES, CHIP 22
R394	1-216-801-91	RES, CHIP 22
R395	1-218-957-81	RES, CHIP 2.2K
R396	1-216-801-91	RES, CHIP 22
R397	1-216-801-91	RES, CHIP 22
R399	1-216-801-91	RES, CHIP 22
R403	1-216-833-91	RES, CHIP 10K
R404	1-216-845-91	RES, CHIP 100K
R405	1-216-845-91	RES, CHIP 100K
R406	1-216-811-91	RES, CHIP 150
R407	1-216-811-91	RES, CHIP 150
R408	1-216-839-91	RES, CHIP 33K
R411	1-218-883-91	RES, CHIP 33K
R412	1-218-883-91	RES, CHIP 33K
R415	1-216-839-91	RES, CHIP 33K
R416	1-216-839-91	RES, CHIP 33K
R417	1-216-813-91	RES, CHIP 220
R418	1-216-817-91	RES, CHIP 470
R419	1-216-833-91	RES, CHIP 10K
R421	1-216-790-91	RES, CHIP 2.7
R422	1-216-797-91	RES, CHIP 10
R423	1-216-790-91	RES, CHIP 2.7
R424	1-216-797-91	RES, CHIP 10
R426	1-218-879-91	RES, CHIP 22K
R427	1-218-871-91	RES, CHIP 10K
R428	1-216-309-91	RES, CHIP 5.6
R433	1-216-821-91	RES, CHIP 1.0K
R440	1-218-831-91	RES, CHIP 220
R441	1-218-871-91	RES, CHIP 10K
R442	1-218-865-91	RES, CHIP 5.6K
R443	1-218-858-91	RES, CHIP 3.0K
R444	1-218-867-91	RES, CHIP 6.8K
R445	1-218-857-91	RES, CHIP 2.7K
R446	1-218-874-91	RES, CHIP 13K
R447	1-218-874-91	RES, CHIP 13K
R452	1-216-864-91	CONDUCTOR, CHIP
R453	1-216-864-91	CONDUCTOR, CHIP
R454	1-216-864-91	CONDUCTOR, CHIP
R457	1-218-859-91	RES, CHIP 3.3K
R458	1-216-864-91	CONDUCTOR, CHIP
R459	1-216-833-91	RES, CHIP 10K
R460	1-218-853-91	RES, CHIP 1.8K
R461	1-216-309-91	RES, CHIP 5.6
R462	1-216-849-91	RES, CHIP 220K
R463	1-216-857-91	RES, CHIP 1.0M
R465	1-216-845-91	RES, CHIP 100K
R466	1-216-821-91	RES, CHIP 1.0K
R468	1-216-833-91	RES, CHIP 10K
R470	1-216-845-91	RES, CHIP 100K
R472	1-218-871-91	RES, CHIP 10K
R473	1-218-863-91	RES, CHIP 4.7K
R474	1-216-853-91	RES, CHIP 470K
R482	1-216-810-91	RES, CHIP 120


Ref.	Part No.	Description
R491	1-216-864-91	CONDUCTOR, CHIP
R492	1-216-864-91	CONDUCTOR, CHIP
R493	1-216-864-91	CONDUCTOR, CHIP
R494	1-216-864-91	CONDUCTOR, CHIP
R495	1-216-864-91	CONDUCTOR, CHIP
R503	1-216-803-91	RES, CHIP 33
R504	1-216-803-91	RES, CHIP 33
R505	1-216-803-91	RES, CHIP 33
R506	1-216-809-91	RES, CHIP 100
R509	1-216-821-91	RES, CHIP 1.0K
R513	1-216-805-91	RES, CHIP 47
R516	1-216-809-91	RES, CHIP 100
R517	1-216-809-91	RES, CHIP 100
R522	1-218-965-81	RES, CHIP 10K
R531	1-216-809-91	RES, CHIP 100
R574	1-216-812-91	RES, CHIP 180
R575	1-216-850-91	RES, CHIP 270K
R576	1-216-833-91	RES, CHIP 10K
R577	1-216-818-91	RES, CHIP 560
R578	1-216-818-91	RES, CHIP 560
R579	1-216-833-91	RES, CHIP 10K
R580	1-216-850-91	RES, CHIP 270K
R604	1-216-845-91	RES, CHIP 100K
R606	1-218-965-81	RES, CHIP 10K
R607	1-216-833-91	RES, CHIP 10K
R613	1-216-833-91	RES, CHIP 10K
R614	1-216-833-91	RES, CHIP 10K
R619	1-216-833-91	RES, CHIP 10K
R620	1-218-965-81	RES, CHIP 10K
R623	1-216-837-91	RES, CHIP 22K
R624	1-216-850-91	RES, CHIP 270K
R625	1-216-864-91	CONDUCTOR, CHIP
R626	1-216-833-91	RES, CHIP 10K
R627	1-216-837-91	RES, CHIP 22K
R630	1-216-837-91	RES, CHIP 22K
R636	1-216-864-91	CONDUCTOR, CHIP
R640	1-216-864-91	CONDUCTOR, CHIP
R642	1-216-833-91	RES, CHIP 10K
R644	1-216-837-91	RES, CHIP 22K
R649	1-216-833-91	RES, CHIP 10K
R650	1-218-965-81	RES, CHIP 10K
R651	1-216-835-91	RES, CHIP 15K
R654	1-216-845-91	RES, CHIP 100K
R657	1-216-839-91	RES, CHIP 33K
R658	1-216-833-91	RES, CHIP 10K
R660	1-216-833-91	RES, CHIP 10K
R661	1-216-833-91	RES, CHIP 10K
R667	1-216-861-91	RES, CHIP 2.2M
R668	1-216-853-91	RES, CHIP 470K
R669	1-216-845-91	RES, CHIP 100K
R670	1-216-833-91	RES, CHIP 10K
R671	1-216-827-91	RES, CHIP 3.3K
R672	1-218-888-91	RES, CHIP 51K
R673	1-216-827-91	RES, CHIP 3.3K
R674	1-216-845-91	RES, CHIP 100K
R675	1-216-839-91	RES, CHIP 33K
R678	1-216-829-91	RES, CHIP 4.7K
R679	1-216-809-91	RES, CHIP 100
R689	1-216-845-91	RES, CHIP 100K
R694	1-216-835-91	RES, CHIP 15K
R696	1-216-846-91	RES, CHIP 120K
R697	1-216-864-91	CONDUCTOR, CHIP
R698	1-216-835-91	RES, CHIP 15K
R699	1-216-833-91	RES, CHIP 10K
R700	1-216-864-91	CONDUCTOR, CHIP

Ref.	Part No.	Description
R805	1-216-809-91	RES, CHIP 100 (1608)
R806	1-216-833-91	RES, CHIP 10K (1608)
R807	1-216-809-91	RES, CHIP 100 (1608)
R808	1-216-833-91	RES, CHIP 10K (1608)
R813	1-216-158-91	RES, CHIP 22 (3216)
R814	1-216-158-91	RES, CHIP 22 (3216)
R815	1-216-797-91	RES, CHIP 10 (1608)
R816	1-216-158-91	RES, CHIP 22 (3216)
R817	1-216-158-91	RES, CHIP 22 (3216)
R818	1-216-797-91	RES, CHIP 10 (1608)
R819	1-218-889-91	RES, CHIP 56K (1608)
R820	1-218-881-91	RES, CHIP 27K (1608)
R821	1-218-881-91	RES, CHIP 27K (1608)
R822	1-218-881-91	RES, CHIP 27K (1608)
R823	1-218-890-91	RES, CHIP 62K (1608)
R826	1-218-871-91	RES, CHIP 10K (1608)
R827	1-218-871-91	RES, CHIP 10K (1608)
R828	1-218-881-91	RES, CHIP 27K (1608)
R830	1-216-815-91	RES, CHIP 330 (1608)
R831	1-216-810-91	RES, CHIP 120 (1608)
R834	1-208-911-81	RES, CHIP 10K (1005)
R837	1-208-922-81	RES, CHIP 30K (1005)
R838	1-208-922-81	RES, CHIP 30K (1005)
R840	1-208-916-81	RES, CHIP 16K (1005)
R843	1-208-922-81	RES, CHIP 30K (1005)
R846	1-208-922-81	RES, CHIP 30K (1005)
R847	1-218-977-81	RES, CHIP 100K (1608)
R850	1-208-911-81	RES, CHIP 10K (1005)
R851	1-208-916-81	RES, CHIP 16K (1005)
R852	1-218-873-91	RES, CHIP 12K (1608)
R853	1-216-298-91	RES, CHIP 2.2 (2012)
R854	1-216-298-91	RES, CHIP 2.2 (2012)
R855	1-216-298-91	RES, CHIP 2.2 (2012)
R856	1-216-298-91	RES, CHIP 2.2 (2012)
R866	1-216-845-91	RES, CHIP 100K (1608)
R868	1-216-849-91	RES, CHIP 220K (1608)
R870	1-216-849-91	RES, CHIP 220K (1608)
R871	1-218-896-91	RES, CHIP 110K (1608)
R872	1-216-844-91	RES, CHIP 82K (1608)
R873	1-216-839-91	RES, CHIP 33K (1608)
R874	1-216-828-91	RES, CHIP 3.9K (1608)
R875	1-216-023-91	RES, CHIP 82 (2012)
R876	1-216-023-91	RES, CHIP 82 (2012)
R877	1-216-023-91	RES, CHIP 82 (2012)
R878	1-216-023-91	RES, CHIP 82 (2012)
R879	1-216-023-91	RES, CHIP 82 (2012)
R880	1-216-023-91	RES, CHIP 82 (2012)
R881	1-216-023-91	RES, CHIP 82 (2012)
R882	1-216-023-91	RES, CHIP 82 (2012)
R901	1-218-937-81	RES, CHIP 47 (1608)
R902	1-218-937-81	RES, CHIP 47 (1608)
R974	1-216-801-91	RES, CHIP 22 (1608)
R975	1-216-801-91	RES, CHIP 22 (1608)
<RESISTOR BLOCK>		
RB101	1-234-496-21	ARRAY, RESISTOR 39
RB102	1-234-496-21	ARRAY, RESISTOR 39
RB103	1-234-496-21	ARRAY, RESISTOR 39
RB104	1-234-496-21	ARRAY, RESISTOR 39
RB105	1-234-496-21	ARRAY, RESISTOR 39
RB106	1-234-496-21	ARRAY, RESISTOR 39
RB107	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB109	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB110	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB112	1-233-423-21	RES, CHIP NETWORK 47 (3216)


Ref.	Part No.	Description
RB113	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB114	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB117	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB118	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB121	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB122	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB123	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB124	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB139	1-233-414-21	RES, CHIP NETWORK 4.7K (3216)
RB147	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB148	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB149	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB150	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB242	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB244	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB246	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB295	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB296	1-234-598-21	RES, CHIP NETWORK 75X4 (3216)
RB297	1-234-599-21	RES, CHIP NETWORK 180X4 (3216)
RB298	1-234-598-21	RES, CHIP NETWORK 75X4 (3216)
RB303	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB310	1-233-414-21	RES, CHIP NETWORK 4.7K (3216)
RB311	1-233-679-91	RES, NETWORK (1608) 470
RB312	1-233-786-91	RES, NETWORK 220 (1608)
RB314	1-233-681-91	RES, NETWORK (1608) 4.7K
RB317	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB318	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB319	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB320	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB321	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB322	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB323	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB324	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB325	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB326	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB327	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB328	1-233-414-21	RES, CHIP NETWORK 4.7K (3216)
RB332	1-233-575-21	RES, CHIP NETWORK 22 (1608)
RB401	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB402	1-233-803-91	RES, NETWORK 1.5K (1608)
RB403	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB405	1-233-803-91	RES, NETWORK 1.5K (1608)
RB406	1-233-792-91	RES, NETWORK 100K (1608)
RB408	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB409	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB410	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB411	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB511	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB517	1-233-575-21	RES, CHIP NETWORK 22
RB518	1-233-575-21	RES, CHIP NETWORK 22
RB519	1-233-575-21	RES, CHIP NETWORK 22
RB520	1-233-575-21	RES, CHIP NETWORK 22
RB521	1-233-575-21	RES, CHIP NETWORK 22
RB522	1-233-575-21	RES, CHIP NETWORK 22
RB523	1-233-575-21	RES, CHIP NETWORK 22
RB524	1-233-575-21	RES, CHIP NETWORK 22
RB525	1-233-575-21	RES, CHIP NETWORK 22
RB526	1-233-575-21	RES, CHIP NETWORK 22
RB527	1-233-575-21	RES, CHIP NETWORK 22
RB528	1-233-575-21	RES, CHIP NETWORK 22
RB529	1-233-575-21	RES, CHIP NETWORK 22
RB530	1-233-575-21	RES, CHIP NETWORK 22
RB531	1-233-575-21	RES, CHIP NETWORK 22
RB532	1-233-575-21	RES, CHIP NETWORK 22
RB602	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB603	1-233-415-21	RES, CHIP NETWORK 10K (3216)

Ref.	Part No.	Description
RB604	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB605	1-233-415-21	RES, CHIP NETWORK 10K (3216)
RB606	1-233-412-21	RES, CHIP NETWORK 1.0K (3216)
RB609	1-233-423-21	RES, CHIP NETWORK 47 (3216)
RB803	1-233-415-21	RES, CHIP NETWORK 10K (3216)
<THERMISTOR>		
△ TH001	1-533-817-21	THERMISTOR
△ TH001	1-804-384-21	THERMISTOR, POSITIVE
△ TH001	1-804-384-31	THERMISTOR, POSITIVE
△ TH002	1-533-817-21	THERMISTOR
△ TH002	1-804-384-21	THERMISTOR, POSITIVE
△ TH002	1-804-384-31	THERMISTOR, POSITIVE
△ TH003	1-533-817-21	THERMISTOR
△ TH003	1-804-384-21	THERMISTOR, POSITIVE
△ TH003	1-804-384-31	THERMISTOR, POSITIVE
<CRYSTAL>		
X102	1-781-640-21	VIBRATOR, CRYSTAL
X102	1-781-640-41	VIBRATOR, CRYSTAL
X301	1-781-856-21	VIBRATOR, CRYSTAL
X301	1-781-856-41	VIBRATOR, CRYSTAL
X302	1-781-768-21	VIBRATOR, CRYSTAL
X401	1-760-496-22	VIBRATOR, LITHIUM NIOBATE


Ref.	Part No.	Description
------	----------	-------------

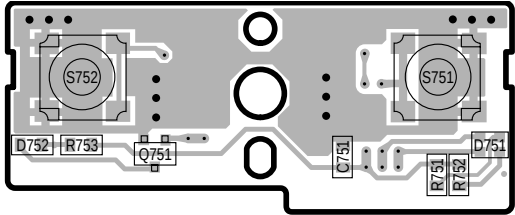

SW-367
A side

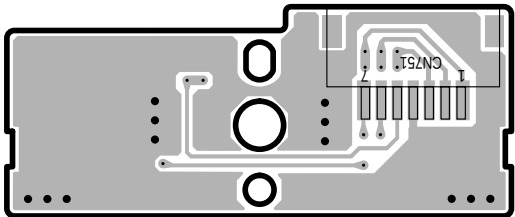

SW-367
B side

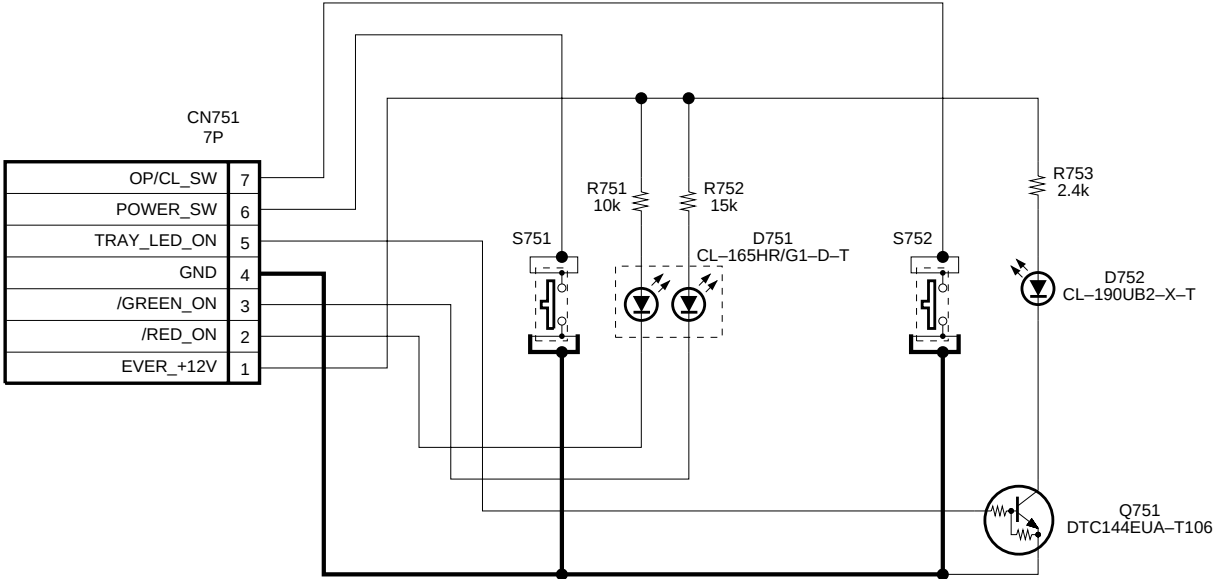

SW-367

SWITCH MOUNTED CIRCUIT BOARD

Ref-No.	Part No.	Description	Remark	Place code
PWB	1-683-435-11	PWB, SW-367		
PWB	1-683-435-21	PWB, SW-367		
CN751	1-785-470-21	CONNECTOR, FPC(LIF(NON-ZIF)7P		
D751	8-719-078-90	DIODE CL-165HR/G1-D-T		
D752	6-500-240-01	DIODE CL-190UB2-X-T		
Q751	8-729-013-97	TRANSISTOR RN1304-TE85L		
Q751	8-729-029-14	TRANSISTOR DTC144EUA-T106		
Q751	8-729-402-44	TRANSISTOR UN5213-TX		
R751	1-216-833-91	RES, CHIP 10K (1608)		
R752	1-216-835-91	RES, CHIP 15K (1608)		
R753	1-216-993-91	RES, CHIP 2.4K (1608)		
S751	1-771-917-21	SWITCH, TACTILE		
S752	1-771-917-21	SWITCH, TACTILE		